



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016


Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

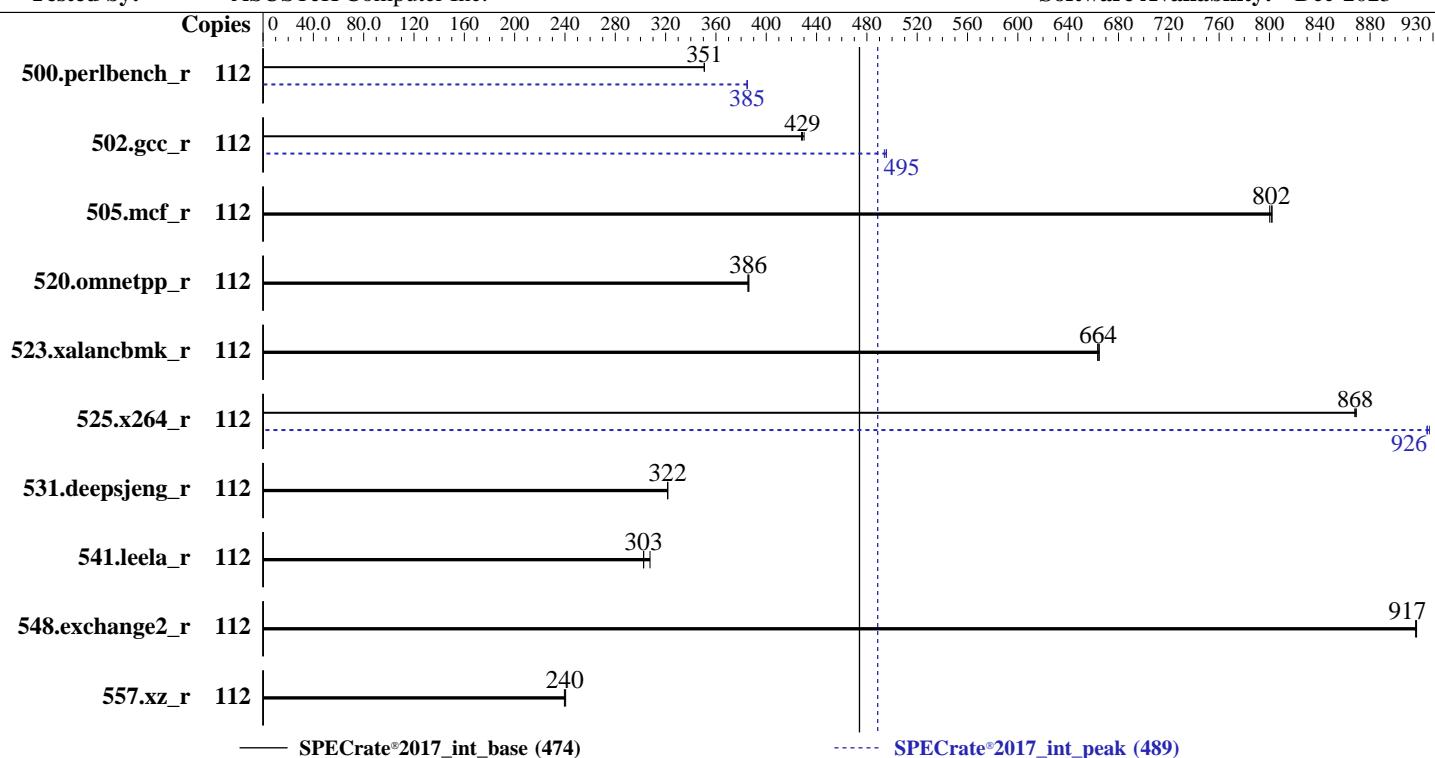

Hardware		Software	
CPU Name:	Intel Xeon Platinum 8450H	OS:	SUSE Linux Enterprise Server 15 SP4 (x86_64)
Max MHz:	3500	Compiler:	Kernel 5.14.21-150400.22-default
Nominal:	2000		C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	56 cores, 2 chips, 2 threads/core		Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Orderable:	1, 2 chip(s)	Parallel:	No
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	Version 2101 released Dec-2023
L2:	2 MB I+D on chip per core	File System:	xfs
L3:	75 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)	Peak Pointers:	32/64-bit
Storage:	1 x 1.6 TB PCIe NVMe SSD	Other:	jemalloc memory allocator V5.0.1
Other:	Cooling: DLC	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	508	351	508	351	508	351	112	463	385	463	385	463	385		
502.gcc_r	112	369	430	371	428	370	429	112	320	495	320	495	321	494		
505.mcf_r	112	226	800	226	802	226	802	112	226	800	226	802	226	802		
520.omnetpp_r	112	381	386	380	386	381	385	112	381	386	380	386	381	385		
523.xalancbmk_r	112	178	663	178	664	178	665	112	178	663	178	664	178	665		
525.x264_r	112	226	869	226	868	226	868	112	212	927	212	925	212	926		
531.deepsjeng_r	112	399	322	399	322	399	322	112	399	322	399	322	399	322		
541.leela_r	112	613	303	603	308	613	303	112	613	303	603	308	613	303		
548.exchange2_r	112	320	917	320	916	320	917	112	320	917	320	916	320	917		
557.xz_r	112	503	241	505	240	504	240	112	503	241	505	240	504	240		

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/ic23u2/lib/intel64:/ic23u2/lib/ia32:/ic23u2/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

SNC = Enable SNC4 (4-clusters)

LLC dead line allc = Disabled

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /ic23u2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Mar 3 23:57:04 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```
23:57:04 up 2 days, 9:13, 2 users, load average: 25.24, 65.86, 87.31
USER      TTY      FROM           LOGIN@     IDLE     JCPU    PCPU WHAT
root      tty1      -           Fri14      2days   0.99s   0.01s /bin/bash ./rate.sh
root      tty2      -           Fri14      2days   0.02s   0.02s -bash
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 4126852
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority       (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes       (-u) 4126852
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=56 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=56 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.460/templogs/preenv.intrate.460.0.log --lognum 460.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic23u2
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8450H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000461
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 28
siblings        : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-27
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```
physical id 1: core ids 0-27
physical id 0: apicids 0-55
physical id 1: apicids 128-183
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8450H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 2
Stepping: 8
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf fmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor
      ds_cpl vmx smx est tm2 ssse3 sdbg fma cxl6 xtrp pdcm pcid dca sse4_1
      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
     lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
      invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
      tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
      avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsavec cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
      arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
      tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
      enqcmd fsrm md_clear serialize tsxlentrk pconfig arch_lbr avx512_fp16
      amx_tile flush_l1d arch_capabilities
```

Virtualization:

L1d cache: 2.6 MiB (56 instances)

L1i cache: 1.8 MiB (56 instances)

L2 cache: 112 MiB (56 instances)

L3 cache: 150 MiB (2 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-6,56-62

NUMA node1 CPU(s): 7-13,63-69

NUMA node2 CPU(s): 14-20,70-76

NUMA node3 CPU(s): 21-27,77-83

NUMA node4 CPU(s): 28-34,84-90

NUMA node5 CPU(s): 35-41,91-97

NUMA node6 CPU(s): 42-48,98-104

NUMA node7 CPU(s): 49-55,105-111

Vulnerability Itlb multihit: Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.6M	12	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	2M	112M	16	Unified	2	2048	1	64
L3	75M	150M	15	Unified	3	81920	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-6,56-62

node 0 size: 128658 MB

node 0 free: 127395 MB

node 1 cpus: 7-13,63-69

node 1 size: 129020 MB

node 1 free: 128270 MB

node 2 cpus: 14-20,70-76

node 2 size: 129020 MB

node 2 free: 128210 MB

node 3 cpus: 21-27,77-83

node 3 size: 129020 MB

node 3 free: 128209 MB

node 4 cpus: 28-34,84-90

node 4 size: 129020 MB

node 4 free: 128158 MB

node 5 cpus: 35-41,91-97

node 5 size: 129020 MB

node 5 free: 128255 MB

node 6 cpus: 42-48,98-104

node 6 size: 129020 MB

node 6 free: 128239 MB

node 7 cpus: 49-55,105-111

node 7 size: 128957 MB

node 7 free: 128164 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	21	21	21	21
1:	12	10	12	12	21	21	21	21
2:	12	12	10	12	21	21	21	21
3:	12	12	12	10	21	21	21	21
4:	21	21	21	21	10	12	12	12
5:	21	21	21	21	12	10	12	12
6:	21	21	21	21	12	12	10	12
7:	21	21	21	21	12	12	12	10

9. /proc/meminfo

MemTotal: 1056499516 kB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

10. who -r
run-level 3 Mar 1 14:44

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections
postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmiev
issue-add-ssh-keys kexec-load lummask man-db-create multipathd nfs nfs-blkmap
nvmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2
indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803
splash=silent
mitigations=auto
quiet

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.50 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

```
vm.extfrag_threshold      500
vm.min_unmapped_ratio    1
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness             60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode      0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000
```

```
-----  
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
20. Disk information
SPEC is set to: /ic23u2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p8  xfs   500G  296G  205G  60%  /
```

```
-----  
21. /sys/devices/virtual/dmi/id
  Vendor:      ASUSTeK COMPUTER INC.
  Product:     ESC4000-E11
  Product Family: Server
  Serial:      /psn/
```

```
-----  
22. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

```
-----  
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor: American Megatrends Inc.
  BIOS Version: 2101
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Platform Notes (Continued)

BIOS Date: 12/12/2023
BIOS Revision: 21.1

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2024

Hardware Availability: Jul-2023

Software Availability: Dec-2023

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS ESC4000-E11
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 474

SPECrate®2017_int_peak = 489

CPU2017 License: 9016

Test Date: Mar-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-03 10:57:03-0500.

Report generated on 2024-03-27 20:19:38 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.