



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

**SPECspeed®2017\_fp\_base = 413**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 19


**Test Date:** Mar-2024

**Test Sponsor:** Fujitsu

**Hardware Availability:** Apr-2024

**Tested by:** Fujitsu

**Software Availability:** Dec-2023

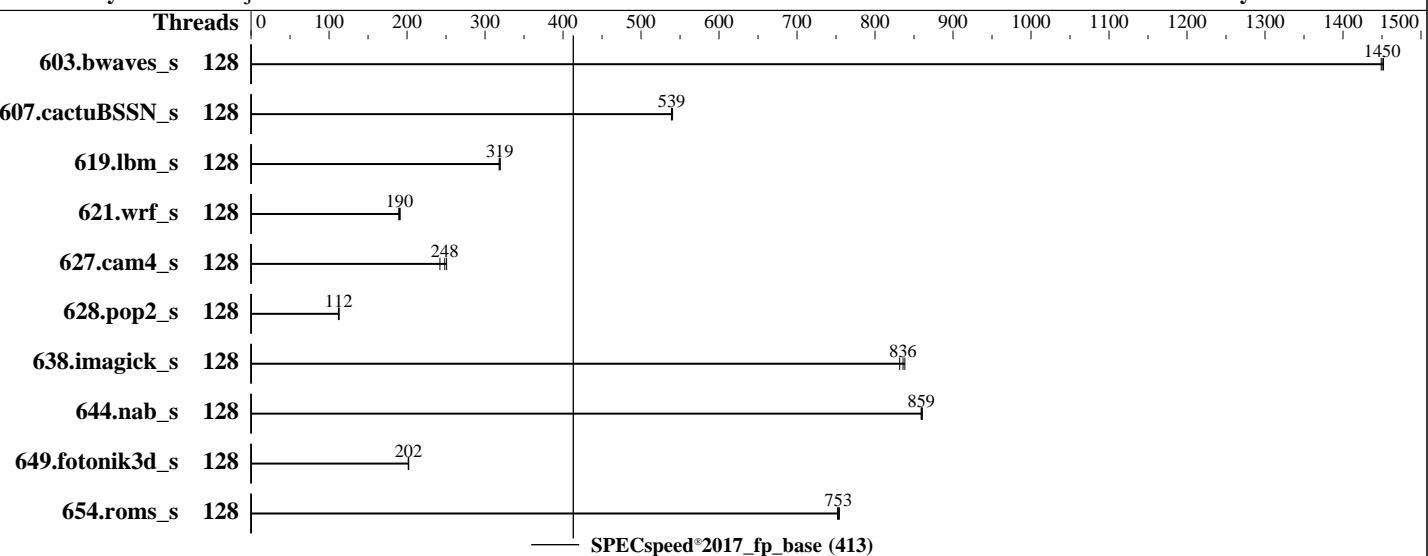

## Hardware

CPU Name: Intel Xeon Platinum 8592+  
 Max MHz: 3900  
 Nominal: 1900  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 320 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)  
 Storage: 1 x SATA M.2, 960GB  
 Other: Cooling: Air

## Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
 5.14.0-284.11.1.el9\_2.x86\_64  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V1.0.0.0 R2.4.0 for D3983-A1x. Released Apr-2024 tested as V1.0.0.0 R2.1.2 for D3983-A1x Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

**SPECspeed®2017\_fp\_base = 413**

**SPECspeed®2017\_fp\_peak = Not Run**

CPU2017 License: 19

Test Date: Mar-2024

Test Sponsor: Fujitsu

Hardware Availability: Apr-2024

Tested by: Fujitsu

Software Availability: Dec-2023

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads
603.bwaves_s	128	40.7	1450	<b>40.7</b>	<b>1450</b>		40.6	1450								
607.cactuBSSN_s	128	30.9	539	30.8	540	<b>30.9</b>	<b>539</b>									
619.lbm_s	128	16.5	318	<b>16.4</b>	<b>319</b>		16.4	319								
621.wrf_s	128	69.8	189	<b>69.5</b>	<b>190</b>		69.2	191								
627.cam4_s	128	36.6	242	35.3	251	<b>35.7</b>	<b>248</b>									
628.pop2_s	128	106	112	105	113	<b>106</b>	<b>112</b>									
638.imagick_s	128	<b>17.3</b>	<b>836</b>	17.2	838	17.3	832									
644.nab_s	128	<b>20.3</b>	<b>859</b>	20.3	861	20.3	859									
649.fotonik3d_s	128	<b>45.2</b>	<b>202</b>	45.2	202	45.1	202									
654.roms_s	128	20.9	754	20.9	752	<b>20.9</b>	<b>753</b>									

**SPECspeed®2017\_fp\_base = 413**

**SPECspeed®2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
cpupower -c all frequency-set -g performance
echo 20000000 > /sys/kernel/debug/sched/wakeup_granularity_ns
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/benchmark/speccpu-23.2.3/lib/intel64:/home/benchmark/speccpu-23.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

SPECspeed®2017\_fp\_base = 413

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2024

Test Sponsor: Fujitsu

Hardware Availability: Apr-2024

Tested by: Fujitsu

Software Availability: Dec-2023

## Platform Notes

BIOS configuration:  
ASPM Support = Auto  
Adjacent Cache Line Prefetch = Disabled  
Override OS Energy Performance = Enabled  
Energy Performance = Balanced Energy  
LLC Prefetch = Enabled  
CPU Performance Boost = Aggressive  
Fan Control = Full  
DBP-F = Enabled  
CPU C1 auto demotion = Enabled  
CPU C1 auto undemotion = Enabled  
IODC Configuration = Enable for Remote InvItoM and Remote WCiLF

```
Sysinfo program /home/benchmark/speccpu-23.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Mar  8 05:39:27 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.el9\_2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----

1. uname -a  
Linux localhost.localdomain 5.14.0-284.11.1.el9\_2.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 12 10:45:03 EDT  
2023 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
05:39:28 up 51 min, 2 users, load average: 11.97, 71.73, 89.28  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root ttym1 04:49 48:46 1.11s 0.29s -bash  
root pts/0 04:50 49:20 0.00s 0.00s -bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

SPECspeed®2017\_fp\_base = 413

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4124644
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4124644
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=128 --tune base -o all --define
  fpspeedaffinity --define drop_caches --define smt-on fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=128 --tune base --output_format all --define
  fpspeedaffinity --define drop_caches --define smt-on --nopower --runmode speed --tune base --size refspeed
  fpspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log
  --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu-23.2.3
```

### 6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping         : 2
microcode        : 0x210001a0
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brsb
cpu cores        : 64
siblings          : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

**SPECspeed®2017\_fp\_base = 413**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 19

**Test Date:** Mar-2024

**Test Sponsor:** Fujitsu

**Hardware Availability:** Apr-2024

**Tested by:** Fujitsu

**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) PLATINUM 8592+
BIOS Model name:      INTEL(R) XEON(R) PLATINUM 8592+
CPU family:            6
Model:                 207
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):            2
Stepping:              2
CPU max MHz:          3900.0000
CPU min MHz:          800.0000
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good noopl xtopology
                      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrpr pdcm pcid dca sse4_1
                      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                     lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                      invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                      vnmr flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2
                      erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                      clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsaved
                      xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx_vnni
                      avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                      hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfnr vaes
                      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocndq la57 rdpid
                      bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
                      tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8
                      flush_l1d arch_capabilities
Virtualization:        VT-x
L1d cache:             6 MiB (128 instances)
L1i cache:             4 MiB (128 instances)
L2 cache:              256 MiB (128 instances)
L3 cache:              640 MiB (2 instances)
NUMA node(s):          2
NUMA node0 CPU(s):    0-63,128-191
NUMA node1 CPU(s):    64-127,192-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
sequence
Vulnerability Srbds:   Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

SPECspeed®2017\_fp\_base = 413

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2024

Test Sponsor: Fujitsu

Hardware Availability: Apr-2024

Tested by: Fujitsu

Software Availability: Dec-2023

## Platform Notes (Continued)

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

-----

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-63,128-191

node 0 size: 515207 MB

node 0 free: 513939 MB

node 1 cpus: 64-127,192-255

node 1 size: 516014 MB

node 1 free: 514594 MB

node distances:

node 0 1

0: 10 21

1: 21 10

-----

9. /proc/meminfo

MemTotal: 1055971284 kB

-----

10. who -r

run-level 3 Mar 8 04:48

-----

11. Systemd service manager version: systemd 252 (252-13.el9\_2)

Default Target Status

multi-user running

-----

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditt avahi-daemon bluetooth chronyd crond cups dbus-broker gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgautils virtqemu vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq fancontrol fcoe firewalld grafana-server gssproxy iprdump iprinit iprupdate iscsid iscsiuiio kpatch kvm_stat ledmon libvirt-guests libvirtd lldpad man-db-restart-cache-update nfs-blkmap nfs-server nftables nmb numad nvmf-autoconnect ostree-readonly-sysroot-migration pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbuild-rebuild rrdcached saslauthd selinux-check-proper-disable serial-getty@ smb speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target targetclid virtinterfaced virtnetworkd virtnodedevd

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

SPECspeed®2017\_fp\_base = 413

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
indirect      virtnwfilterd virtproxyd virtsecretd virtstoraged wpa_supplicant
               spice-vdagendt sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
               systemd-sysupdate systemd-sysupdate-reboot virtlockd virtlogd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
    root=UUID=f5adb891-1095-4f52-8e35-a2c8d236c04d
    ro
    crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
    resume=UUID=cbd8592f-2c64-4ed4-b9ba-3ff32ad03af8
    rhgb
    quiet

-----
14. cpupower frequency-info
   analyzing CPU 0:
       current policy: frequency should be within 800 MHz and 3.90 GHz.
                      The governor "performance" may decide which speed to use
                      within this range.
       boost state support:
           Supported: yes
           Active: yes

-----
15. tuned-adm active
   Current active profile: throughput-performance

-----
16. sysctl
   kernel.numa_balancing          1
   kernel.randomize_va_space      2
   vm.compaction_proactiveness   20
   vm.dirty_background_bytes      0
   vm.dirty_background_ratio     10
   vm.dirty_bytes                 0
   vm.dirty_expire_centisecs    3000
   vm.dirty_ratio                 40
   vm.dirty_writeback_centisecs  500
   vm.dirtytime_expire_seconds   43200
   vm.extfrag_threshold          500
   vm.min_unmapped_ratio         1
   vm.nr_hugepages                0
   vm.nr_hugepages_mempolicy      0
   vm.nr_overcommit_hugepages     0
   vm.swappiness                  10
   vm.watermark_boost_factor     15000
   vm.watermark_scale_factor      10
   vm.zone_reclaim_mode           0

-----
17. /sys/kernel/mm/transparent_hugepage
   defrag      always defer defer+madvise [madvise] never
   enabled      [always] madvise never
   hpage_pmd_size 2097152
   shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

SPECspeed®2017\_fp\_base = 413

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
defrag          1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release      Red Hat Enterprise Linux 9.2 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)  
system-release Red Hat Enterprise Linux release 9.2 (Plow)
```

```
-----  
20. Disk information  
SPEC is set to: /home/benchmark/speccpu-23.2.3  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sdb5        xfs   590G  43G  547G  8%  /home
```

```
-----  
21. /sys/devices/virtual/dmi/id  
Vendor:          FUJITSU  
Product:         PRIMERGY RX2540 M7  
Product Family: SERVER  
Serial:          EWCEXXXXXX
```

```
-----  
22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
16x Hynix HMCG94AGBRA181N 64 GB 2 rank 5600
```

```
-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      FUJITSU  
BIOS Version:     V1.0.0.0 R2.1.2 for D3983-A1x  
BIOS Date:        12/21/2023  
BIOS Revision:    2.1  
Firmware Revision: 2.36
```

## Compiler Version Notes

```
=====  
C          | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)  
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

```
=====  
C++, C, Fortran | 607.cactuBSSN_s(base)  
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

SPECspeed®2017\_fp\_base = 413

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2024

Test Sponsor: Fujitsu

Hardware Availability: Apr-2024

Tested by: Fujitsu

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

---

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

=====  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

---

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

=====  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

---

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

SPECspeed®2017\_fp\_base = 413

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

## Base Portability Flags (Continued)

644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevC.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-EMR-RevC.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8592+,  
1.90GHz

SPECspeed®2017\_fp\_base = 413

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Apr-2024

Software Availability: Dec-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-08 05:39:27-0500.

Report generated on 2024-03-27 20:29:04 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.