



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

FusionServer 5885H V7 (Intel Xeon Gold 6416H)

CPU2017 License: 6488


Test Date: Mar-2024

Test Sponsor: xFusion

Hardware Availability: Jul-2023

Tested by: xFusion

Software Availability: Dec-2023

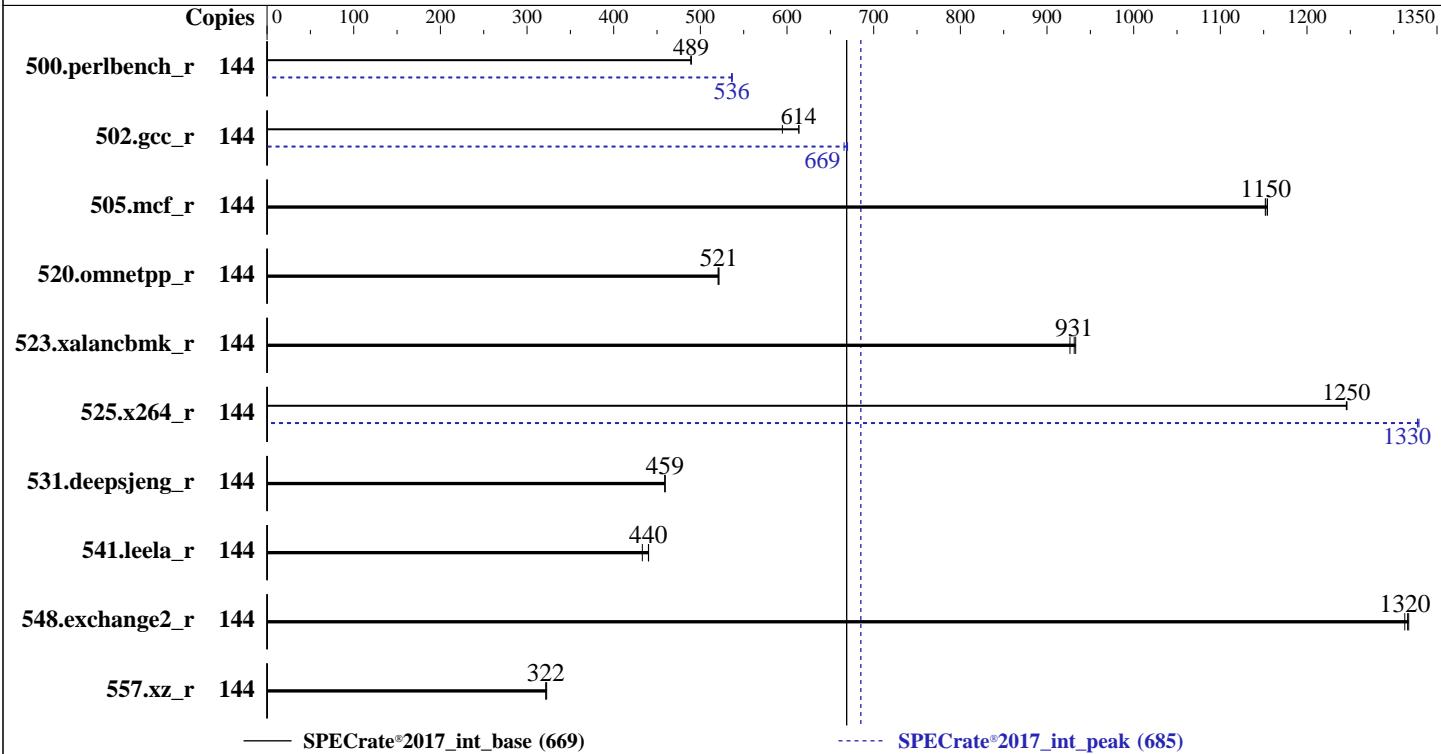

Hardware

CPU Name: Intel Xeon Gold 6416H
 Max MHz: 4200
 Nominal: 2200
 Enabled: 72 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 45 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Compiler: 5.14.0-70.13.1.el9_0.x86_64
 C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 01.02.01.03 Released Jan-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

CPU2017 License: 6488

Test Date: Mar-2024

Test Sponsor: xFusion

Hardware Availability: Jul-2023

Tested by: xFusion

Software Availability: Dec-2023

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	468	489	469	489	468	489	144	427	537	428	536	427	536		
502.gcc_r	144	343	595	332	614	332	614	144	306	666	304	670	305	669		
505.mcf_r	144	202	1150	202	1150	202	1150	144	202	1150	202	1150	202	1150	202	1150
520.omnetpp_r	144	362	521	363	520	362	521	144	362	521	363	520	362	521		
523.xalancbmk_r	144	163	933	164	926	163	931	144	163	933	164	926	163	931		
525.x264_r	144	202	1250	202	1250	202	1250	144	190	1330	190	1330	190	1330		
531.deepsjeng_r	144	359	459	359	459	359	459	144	359	459	359	459	359	459		
541.leela_r	144	542	440	551	433	542	440	144	542	440	551	433	542	440		
548.exchange2_r	144	286	1320	287	1310	287	1320	144	286	1320	287	1310	287	1320		
557.xz_r	144	483	322	483	322	482	323	144	483	322	483	322	482	323		

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/Uniautos/cpu2017/lib/intel64:/home/Uniautos/cpu2017/lib/ia32:/home/Uniautos/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2024
Hardware Availability: Jul-2023
Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC2 (2-clusters)

Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Mar 12 15:32:26 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
15:32:26 up 3:59, 3 users, load average: 1.72, 25.36, 17.61
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 15:02 1:06 1.06s 0.01s -bash
root pts/1 15:14 17:54 0.00s 0.00s -bash
root pts/2 13:47 1:41m 0.00s 0.00s -bash

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2024
Hardware Availability: Jul-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
-----  
3. Username  
From environment variable $USER: root  
  
-----  
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4125196  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4125196  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited  
  
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/0  
-bash  
/bin/sh ./test-rate-cpu2017.sh  
runcpu --define default-platform-flags --copies 144 -c ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg  
--define smt-on --define cores=72 --define physicalfirst --define invoke_with_interleave --define  
drop_caches --tune base,peak -o all intrate  
runcpu --define default-platform-flags --copies 144 --configfile  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=72 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower  
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.091/templogs/preenv.intrate.091.0.log --lognum 091.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/Uniautos/cpu2017  
  
-----  
6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6416H  
vendor_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0xb0004d0  
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores : 18  
siblings : 36  
4 physical ids (chips)  
144 processors (hardware threads)  
physical id 0: core ids 0-17  
physical id 1: core ids 0-17  
physical id 2: core ids 0-17  
physical id 3: core ids 0-17
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

CPU2017 License: 6488

Test Date: Mar-2024

Test Sponsor: xFusion

Hardware Availability: Jul-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

```
physical id 0: apicids 0-35
physical id 1: apicids 128-163
physical id 2: apicids 256-291
physical id 3: apicids 384-419
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 144
On-line CPU(s) list: 0-143
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Gold 6416H
BIOS Model name: Intel(R) Xeon(R) Gold 6416H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 18
Socket(s): 4
Stepping: 8
BogoMIPS: 4400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
      vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
      abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
      intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
      flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms
      invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
      clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
      xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect
      avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vmbi umip pkru
      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
      tme avx512_vpvcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
      enqcmd fsrm md_clear serialize tsxlentrk pconfig arch_lbr avx512_fp16
      amx_tile flush_llid arch_capabilities
```

Virtualization: VT-x

L1d cache: 3.4 MiB (72 instances)

L1i cache: 2.3 MiB (72 instances)

L2 cache: 144 MiB (72 instances)

L3 cache: 180 MiB (4 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-8,72-80

NUMA node1 CPU(s): 9-17,81-89

NUMA node2 CPU(s): 18-26,90-98

NUMA node3 CPU(s): 27-35,99-107

NUMA node4 CPU(s): 36-44,108-116

NUMA node5 CPU(s): 45-53,117-125

NUMA node6 CPU(s): 54-62,126-134

NUMA node7 CPU(s): 63-71,135-143

Vulnerability Itlb multihit: Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2024
Hardware Availability: Jul-2023
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Llftf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	45M	180M	15	Unified	3	49152	1	64

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0-8,72-80
node 0 size: 128252 MB
node 0 free: 122323 MB
node 1 cpus: 9-17,81-89
node 1 size: 129020 MB
node 1 free: 124852 MB
node 2 cpus: 18-26,90-98
node 2 size: 129020 MB
node 2 free: 124977 MB
node 3 cpus: 27-35,99-107
node 3 size: 128983 MB
node 3 free: 125006 MB
node 4 cpus: 36-44,108-116
node 4 size: 129020 MB
node 4 free: 125050 MB
node 5 cpus: 45-53,117-125
node 5 size: 129020 MB
node 5 free: 125022 MB
node 6 cpus: 54-62,126-134
node 6 size: 129020 MB
node 6 free: 125042 MB
node 7 cpus: 63-71,135-143
node 7 size: 129000 MB
node 7 free: 124934 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 12 21 21 21 21 21 21
1: 12 10 21 21 21 21 21 21
2: 21 21 10 12 21 21 21 21
3: 21 21 12 10 21 21 21 21
4: 21 21 21 21 10 12 21 21
5: 21 21 21 21 12 10 21 21
6: 21 21 21 21 21 21 10 12
7: 21 21 21 21 21 21 12 10

9. /proc/meminfo
MemTotal: 1056088432 kB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

CPU2017 License: 6488

Test Date: Mar-2024

Test Sponsor: xFusion

Hardware Availability: Jul-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

```
10. who -r
    run-level 3 Mar 12 11:32

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target      Status
    multi-user          degraded

-----
12. Failed units, from systemctl list-units --state=failed
        UNIT            LOAD   ACTIVE SUB   DESCRIPTION
        * dnf-makecache.service loaded failed dnf makecache

-----
13. Services, from systemctl list-unit-files
    STATE           UNIT FILES
    enabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited crond
                    dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd
                    rsyslog selinux-autorelabel-mark sshd sssd systemd-network-generator tuned udisks2
    enabled-runtime systemd-remount-fs
    disabled        console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update nftables rdisc
                    rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
                    systemd-pstore systemd-sysext
    indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
    root=UUID=fc5aaa98-7763-4e7f-8371-1b1810d17883
    ro
    crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
    resume=UUID=62bda881-0d36-43ce-826e-76cb2ea35911
    nohz_full=1-143

-----
15. cpupower frequency-info
    analyzing CPU 0:
        Unable to determine current policy
        boost state support:
            Supported: yes
            Active: yes

-----
16. tuned-adm active
    Current active profile: throughput-performance

-----
17. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space      2
    vm.compaction_proactiveness   20
    vm.dirty_background_bytes      0
    vm.dirty_background_ratio     10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs    3000
    vm.dirty_ratio                 40
    vm.dirty_writeback_centisecs  500
    vm.dirtytime_expire_seconds   43200
    vm.extfrag_threshold          500
    vm.min_unmapped_ratio         1
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Gold 6416H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

Test Date: Mar-2024

Hardware Availability: Jul-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness            10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     0

-----
18. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
20. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.0 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
    system-release  Red Hat Enterprise Linux release 9.0 (Plow)

-----
21. Disk information
    SPEC is set to: /home/Uniautos/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda3        xfs   272G  119G  154G  44%  /home

-----
22. /sys/devices/virtual/dmi/id
    Vendor:          XFUSION
    Product:         5885H V7
    Product Family: EagleStream

-----
23. dmidecode
    Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
    18x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800
    14x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800

-----
24. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:      XFUSION
    BIOS Version:     01.02.01.03
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Gold 6416H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

Test Date: Mar-2024

Hardware Availability: Jul-2023

Software Availability: Dec-2023

Platform Notes (Continued)

BIOS Date: 01/01/2024

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2024
Hardware Availability: Jul-2023
Software Availability: Dec-2023

Base Compiler Invocation (Continued)

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 5885H V7 (Intel Xeon Gold 6416H)

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

CPU2017 License: 6488

Test Date: Mar-2024

Test Sponsor: xFusion

Hardware Availability: Jul-2023

Tested by: xFusion

Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs

-fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4

-fno-strict-overflow

-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin

-lqkmalloc

502.gcc_r: -m32

-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin

-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4

-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 669

SPECrate®2017_int_peak = 685

CPU2017 License: 6488

Test Date: Mar-2024

Test Sponsor: xFusion

Hardware Availability: Jul-2023

Tested by: xFusion

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-12 03:32:26-0400.

Report generated on 2024-04-09 15:43:37 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-09.