



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpim\_peak2007 = 40.4

SPECmpim\_base2007 = 40.4

MPI2007 license: 28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Aug-2020

Hardware Availability: Oct-2020

Software Availability: Oct-2020

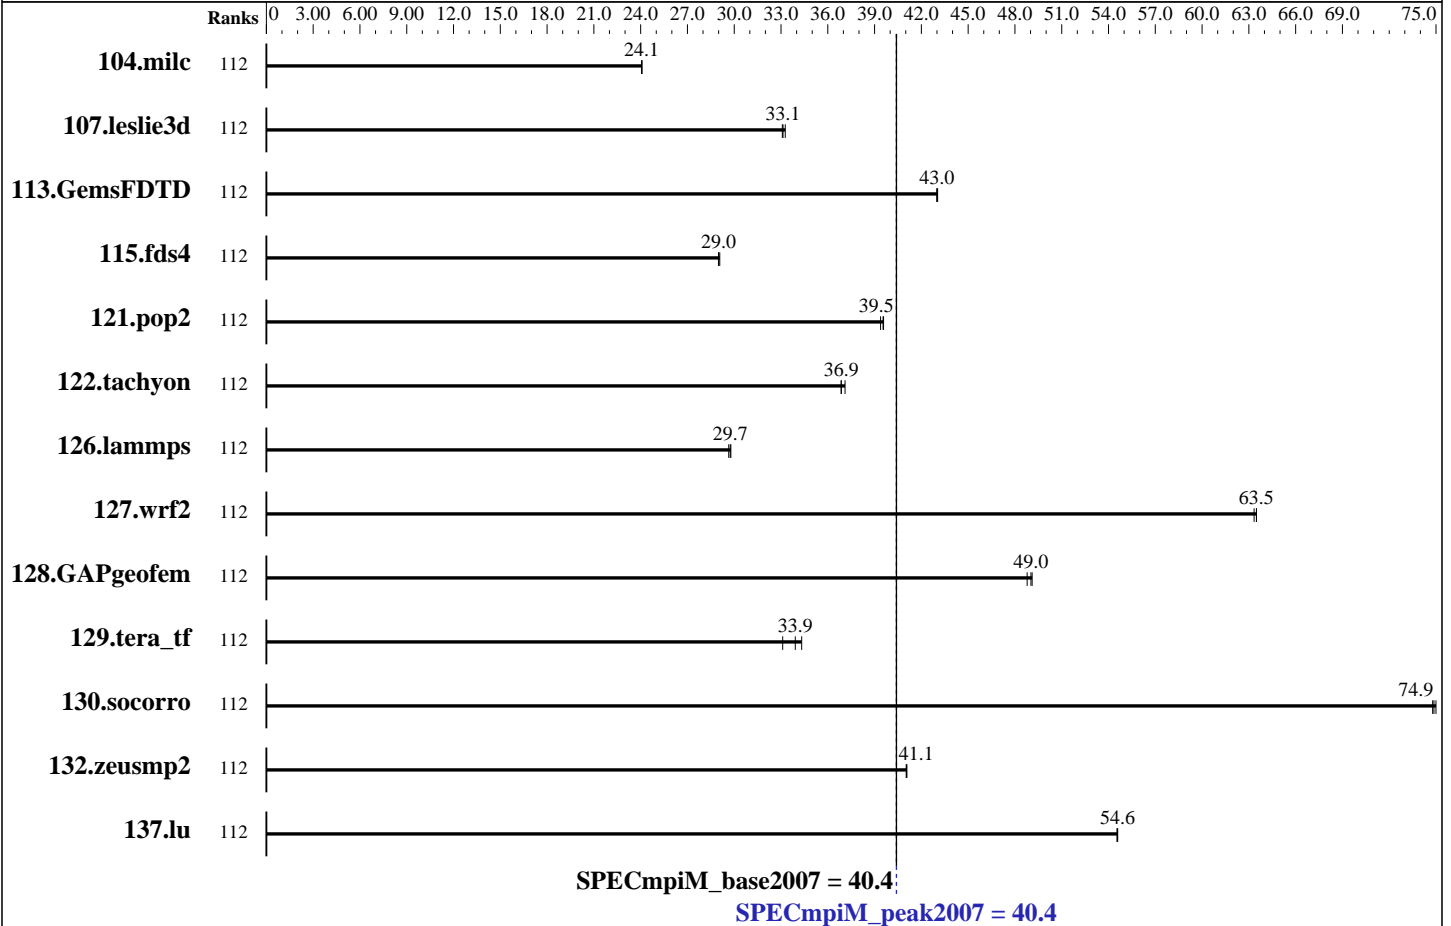

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	112	65.0	24.1	65.0	24.1	<b>65.0</b>	<b>24.1</b>	112	65.0	24.1	65.0	24.1	<b>65.0</b>	<b>24.1</b>		
107.leslie3d	112	<b>158</b>	<b>33.1</b>	157	33.3	158	33.1	112	<b>158</b>	<b>33.1</b>	157	33.3	158	33.1		
113.GemsFDTD	112	<b>147</b>	<b>43.0</b>	147	43.0	147	43.0	112	<b>147</b>	<b>43.0</b>	147	43.0	147	43.0		
115.fds4	112	67.1	29.1	67.3	29.0	<b>67.3</b>	<b>29.0</b>	112	67.1	29.1	67.3	29.0	<b>67.3</b>	<b>29.0</b>		
121.pop2	112	<b>104</b>	<b>39.5</b>	104	39.6	105	39.4	112	<b>104</b>	<b>39.5</b>	104	39.6	105	39.4		
122.tachyon	112	75.9	36.9	<b>75.9</b>	<b>36.9</b>	75.4	37.1	112	75.9	36.9	<b>75.9</b>	<b>36.9</b>	75.4	37.1		
126.lammps	112	97.9	29.8	<b>98.0</b>	<b>29.7</b>	98.3	29.6	112	97.9	29.8	<b>98.0</b>	<b>29.7</b>	98.3	29.6		
127.wrf2	112	123	63.5	123	63.3	<b>123</b>	<b>63.5</b>	112	123	63.5	123	63.3	<b>123</b>	<b>63.5</b>		
128.GAPgeofem	112	42.3	48.8	<b>42.1</b>	<b>49.0</b>	42.1	49.1	112	42.3	48.8	<b>42.1</b>	<b>49.0</b>	42.1	49.1		
129.tera_tf	112	80.6	34.3	<b>81.6</b>	<b>33.9</b>	83.6	33.1	112	80.6	34.3	<b>81.6</b>	<b>33.9</b>	83.6	33.1		

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM\_peak2007 = 40.4

SPECmpiM\_base2007 = 40.4

MPI2007 license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Aug-2020

Hardware Availability: Oct-2020

Software Availability: Oct-2020

### Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
130.socorro	112	51.0	74.8	50.9	75.0	<b>51.0</b>	<b>74.9</b>	112	51.0	74.8	50.9	75.0	<b>51.0</b>	<b>74.9</b>		
132.zeusmp2	112	<b>75.6</b>	<b>41.1</b>	75.6	41.1	75.6	41.0	112	<b>75.6</b>	<b>41.1</b>	75.6	41.1	75.6	41.0		
137.lu	112	67.3	54.6	67.4	54.5	<b>67.4</b>	<b>54.6</b>	112	67.3	54.6	67.4	54.5	<b>67.4</b>	<b>54.6</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

#### Hardware Summary

Type of System: Homogeneous  
 Compute Node: ThinkSystem SR860 V2  
 Interconnect: Intel Omni-Path  
 File Server Node: NFS  
 Total Compute Nodes: 1  
 Total Chips: 4  
 Total Cores: 112  
 Total Threads: 112  
 Total Memory: 1536 GB  
 Base Ranks Run: 112  
 Minimum Peak Ranks: 112  
 Maximum Peak Ranks: 112

#### Software Summary

C Compiler: Intel C++ Compiler 18.0 Update 3 for Linux  
 Version 18.0.3 Build 20180410  
 C++ Compiler: Intel C++ Compiler 18.0 Update 3 for Linux  
 Version 18.0.3 Build 20180410  
 Fortran Compiler: Intel Fortran Compiler 18.0 Update 3 for Linux  
 Version 18.0.3 Build 20180410  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 MPI Library: Intel MPI Library for Linux\* OS  
 Version 2018 Update 3 Build 20180411  
 Other MPI Info: None  
 Pre-processors: No  
 Other Software: None

### Node Description: ThinkSystem SR860 V2

#### Hardware

Number of nodes: 1  
 Uses of the node: compute  
 Vendor: Lenovo Global Technology  
 Model: ThinkSystem SR860 V2  
 CPU Name: Intel Xeon Platinum 8380H  
 CPU(s) orderable: 2,4 chips  
 Chips enabled: 4  
 Cores enabled: 112  
 Cores per chip: 28  
 Threads per core: 1  
 CPU Characteristics: None  
 CPU MHz: 2900  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 39424 KB I+D on chip per chip  
 Other Cache: None  
 Memory: 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)  
 Disk Subsystem: 1 x 1 TB SATA 2.5" SSD  
 Other Hardware: N/A  
 Adapter: Intel Omni-Path Fabric Adapter 100 Series  
 Number of Adapters: 1  
 Slot Type: PCI-Express 3.0 x16  
 Data Rate: 100 Gb/s  
 Ports Used: 1

#### Software

Adapter: Intel Omni-Path Fabric Adapter 100 Series  
 Adapter Driver: 10.10.2.0.46  
 Adapter Firmware: 10.4.0.0.146  
 Operating System: Red Hat Enterprise Linux Server release 8.2,  
 Kernel 4.18.0-193.el8.x86\_64  
 Local File System: xfs  
 Shared File System: None  
 System State: Multi-user, run level 3  
 Other Software: None

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

**SPECmpim\_peak2007 = 40.4**

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

**SPECmpim\_base2007 = 40.4**

**MPI2007 license:** 28

**Test date:** Aug-2020

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Oct-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2020

### Node Description: ThinkSystem SR860 V2

Interconnect Type: Intel Omni-Path

### Node Description: NFS

#### Hardware

#### Software

Number of nodes: 1  
 Uses of the node: Fileserver  
 Vendor: Lenovo Global Technology  
 Model: ThinkSystem SR860 V2  
 CPU Name: Intel Xeon Platinum 8380H  
 CPU(s) orderable: 2,4 chips  
 Chips enabled: 4  
 Cores enabled: 112  
 Cores per chip: 28  
 Threads per core: 1  
 CPU Characteristics: None  
 CPU MHz: 2900  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 39424 KB I+D on chip per chip  
 Other Cache: None  
 Memory: 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA)  
 Disk Subsystem: 1 x 1 TB SATA 2.5" SSD  
 Other Hardware: None  
 Adapter: Intel Omni-Path Fabric Adapter 100 Series  
 Number of Adapters: 1  
 Slot Type: PCI-Express 3.0 x16  
 Data Rate: 100 Gb/s  
 Ports Used: 1  
 Interconnect Type: Intel Omni-Path

Adapter: Intel Omni-Path Fabric Adapter 100 Series  
 Adapter Driver: 10.10.2.0.46  
 Adapter Firmware: 10.4.0.0.146  
 Operating System: Red Hat Enterprise Linux Server release 7.8  
 Local File System: None  
 Shared File System: NFS  
 System State: Multi-User, run level 3  
 Other Software: None

### Interconnect Description: Intel Omni-Path

#### Hardware

#### Software

Vendor: Intel  
 Model: Intel Omni-Path Fabric Adapter 100 Series  
 Switch Model: Intel Omni-Path 100 Series  
 Number of Switches: 1  
 Number of Ports: 48  
 Data Rate: 100 Gb/s  
 Firmware: 10.3.0.0.60  
 Topology: Mesh  
 Primary Use: MPI Traffic



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM\_peak2007 = 40.4

SPECmpiM\_base2007 = 40.4

MPI2007 license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Aug-2020

Hardware Availability: Oct-2020

Software Availability: Oct-2020

## Submit Notes

The config file option 'submit' was used.

## General Notes

MPI startup command:

mpiexec command was used to start MPI jobs.

RAM configuration:

Compute nodes have 2 x 32 GB RDIMM on each memory channel.

BIOS settings:

Operating Mode : Maximum Performance Mode

Intel Hyper-Threading Technology (SMT): Disabled

SNC (Sub-NUMA Cluster): Enable

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Base Compiler Invocation

C benchmarks:

mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:

mpiifort

Benchmarks using both Fortran and C:

mpiicc mpiifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK

127.wrf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX

130.socorro: -assume nostd\_intent\_in

## Base Optimization Flags

C benchmarks:

-O3 -ipo -xCORE-AVX512 -no-prec-div

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM\_peak2007 = 40.4

SPECmpiM\_base2007 = 40.4

MPI2007 license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Aug-2020

Hardware Availability: Oct-2020

Software Availability: Oct-2020

## Base Optimization Flags (Continued)

C++ benchmarks:

126.lammps: -O3 -ipo -xCORE-AVX512 -no-prec-div

Fortran benchmarks:

-O3 -ipo -xCORE-AVX512 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -ipo -xCORE-AVX512 -no-prec-div

## Peak Optimization Flags

C benchmarks:

104.milc: basepeak = yes

122.tachyon: basepeak = yes

C++ benchmarks:

126.lammps: basepeak = yes

Fortran benchmarks:

107.leslie3d: basepeak = yes

113.GemsFDTD: basepeak = yes

129.tera\_tf: basepeak = yes

137.lu: basepeak = yes

Benchmarks using both Fortran and C:

115.fds4: basepeak = yes

121.pop2: basepeak = yes

127.wrf2: basepeak = yes

128.GAPgeofem: basepeak = yes

130.socorro: basepeak = yes

132.zeusmp2: basepeak = yes



# SPEC MPI2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM\_peak2007 = 40.4

SPECmpiM\_base2007 = 40.4

**MPI2007 license:** 28

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Aug-2020

**Hardware Availability:** Oct-2020

**Software Availability:** Oct-2020

The flags files that were used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.20201007.html](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20201007.html)

[http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM\\_Platform\\_Flags.html](http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.20201007.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20201007.xml)

[http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM\\_Platform\\_Flags.xml](http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Tue Oct 13 17:09:31 2020 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 13 October 2020.