



SPEC ACCEL™ OMP Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Oak Ridge National Laboratory)

Intel Xeon Phi CPU 7230


Cray XC40 Intel Xeon Phi series

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 3.59

ACCEL license: 054A
Test sponsor: Oak Ridge National Laboratory
Tested by: Oak Ridge National Laboratory

Test date: May-2017
Hardware Availability: Jun-2016
Software Availability: Jul-2017

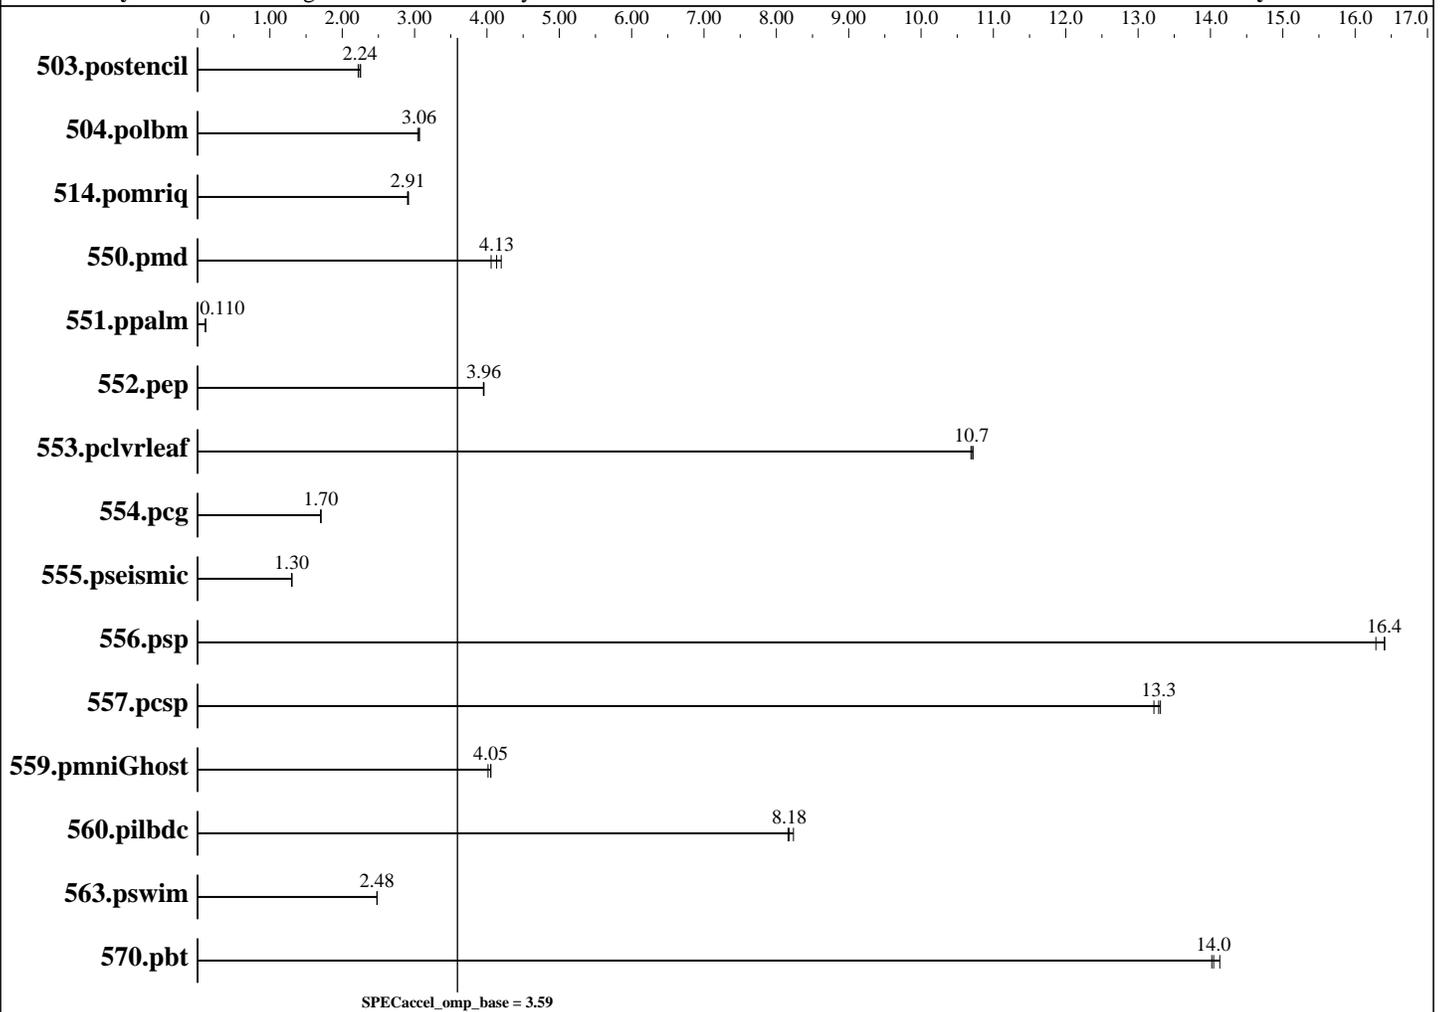

Hardware

CPU Name: Intel Xeon Phi CPU 7230 @ 1.30GHz
 CPU Characteristics: Simultaneous multithreading (SMT) on, Turbo off.
 CPU MHz: 1300
 CPU MHz Maximum: 1300
 FPU: Integrated
 CPU(s) enabled: 64 cores, 1 chip, 64 cores/chip, 4 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per tile (2 cores)
 L3 Cache: None
 Other Cache: None

Continued on next page

Accelerator

Accel Model Name: Intel Xeon Phi CPU 7230
 Accel Vendor: Intel
 Accel Name: Intel Xeon Phi CPU 7230
 Type of Accel: CPU
 Accel Connection: N/A
 Does Accel Use ECC: Yes
 Accel Description: Second generation Intel Xeon Phi self-bootable CPU, SMT on, Turbo off, flat DDR4+MCDRAM
 Accel Driver: N/A



SPEC ACCEL OMP Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Oak Ridge National Laboratory)

Intel Xeon Phi CPU 7230

Cray XC40 Intel Xeon Phi series

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 3.59

ACCEL license: 054A
Test sponsor: Oak Ridge National Laboratory
Tested by: Oak Ridge National Laboratory

Test date: May-2017
Hardware Availability: Jun-2016
Software Availability: Jul-2017

Hardware (Continued)

Memory: 96 GB (6 x 16 GB 2Rx4 2400MHz DDR4 ECC Registered) + 16 GB MCDRAM (flat)
Disk Subsystem: 14P Lustre file system
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 3.12.51-52.31.1_1.0600.9146-cray_ari_s
Compiler: Intel Compiler 17.0.0 20160721
File System: lustre
System State: Run level 3 (Multi-user, non-graphical)
Other Software: craype-mic-knl

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.postencil	48.6	2.24	48.4	2.25	49.1	2.22						
504.polbm	39.8	3.06	39.8	3.07	40.1	3.04						
514.pomriq	213	2.92	214	2.91	214	2.90						
550.pmd	59.4	4.06	58.3	4.13	57.4	4.20						
551.ppalms	4961	0.110	4962	0.110	4961	0.110						
552.pep	58.4	3.96	58.5	3.95	58.4	3.96						
553.pclvrleaf	107	10.7	107	10.7	107	10.7						
554.pcg	195	1.70	195	1.70	195	1.70						
555.pseismic	217	1.30	217	1.30	216	1.31						
556.psp	50.2	16.3	49.9	16.4	49.9	16.4						
557.pcsp	64.5	13.3	65.0	13.2	64.7	13.3						
559.pminiGhost	98.9	4.01	98.0	4.05	97.9	4.05						
560.pilbdc	79.8	8.18	80.0	8.16	79.3	8.24						
563.pswim	64.1	2.48	64.1	2.48	64.1	2.48						
570.pbt	55.2	14.1	55.6	14.0	55.5	14.0						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
The following expression was used for the submit command:
'aprun -n 1 -d 256 -j 4 -cc depth -q numactl -m 1 \$command'



SPEC ACCEL OMP Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Oak Ridge National Laboratory)

Intel Xeon Phi CPU 7230

Cray XC40 Intel Xeon Phi series

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 3.59

ACCEL license: 054A
Test sponsor: Oak Ridge National Laboratory
Tested by: Oak Ridge National Laboratory

Test date: May-2017
Hardware Availability: Jun-2016
Software Availability: Jul-2017

Platform Notes

```
Sysinfo program
/lustre/atlas2/stf006/scratch/vgv/spec/accel/kit75percival/Docs/sysinfo
$Rev: 6965 $ $Date:: 2015-04-21 #$ c05a7f14b1b1765e3fe1df68447e8a35
running on nid00004 Wed May 24 08:20:06 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon Phi(TM) CPU 7230 @ 1.30GHz
 1 "physical id"s (chips)
 256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 64
siblings : 256
physical 0: cores 0 1 2 3 6 7 10 11 12 13 14 15 18 19 20 21 22 23 24 25 26
27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51
52 53 56 57 58 59 60 61 62 63 64 65 68 69 70 71 72 73
cache size : 1024 KB
```

```
From /proc/meminfo
MemTotal: 115628772 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

uname -a:

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Oak Ridge National Laboratory)

Intel Xeon Phi CPU 7230

Cray XC40 Intel Xeon Phi series

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 3.59

ACCEL license: 054A
Test sponsor: Oak Ridge National Laboratory
Tested by: Oak Ridge National Laboratory

Test date: May-2017
Hardware Availability: Jun-2016
Software Availability: Jul-2017

Platform Notes (Continued)

```
Linux nid00004 3.12.51-52.31.1_1.0600.9146-cray_ari_c #1 SMP Sat Aug 27
20:40:03 UTC 2016 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 23 00:46
```

```
SPEC is set to: /lustre/atlas2/stf006/scratch/vgv/spec/accel/kit75percival
Filesystem      Type      Size  Used Avail Use% Mounted on
10.36.226.77@o2ib:/atlas2 lustre    14P   7.4P  5.8P  57% /lustre/atlas2
```

Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'

(End of data from sysinfo program)

General Notes

The following environment variables were used:

```
OMP_NUM_THREADS=256
KMP_HW_SUBSET=64C,4T
```

System settings:

```
Memory mode: flat
```

Base Compiler Invocation

C benchmarks:
cc

Fortran benchmarks:
ftn

Benchmarks using both Fortran and C:
cc ftn

Base Portability Flags

```
503.postencil: -DSPEC_USE_INNER_SIMD
504.polbm: -DSPEC_USE_INNER_SIMD
514.pomriq: -DSPEC_USE_INNER_SIMD
550.pmd: -DSPEC_USE_INNER_SIMD -80
551.ppalm: -DSPEC_USE_INNER_SIMD
552.pep: -DSPEC_USE_INNER_SIMD
553.pclvrleaf: -DSPEC_USE_INNER_SIMD
554.pcg: -DSPEC_USE_INNER_SIMD
```

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2017 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Oak Ridge National Laboratory)

Intel Xeon Phi CPU 7230

Cray XC40 Intel Xeon Phi series

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 3.59

ACCEL license: 054A
Test sponsor: Oak Ridge National Laboratory
Tested by: Oak Ridge National Laboratory

Test date: May-2017
Hardware Availability: Jun-2016
Software Availability: Jul-2017

Base Portability Flags (Continued)

555.pseismic: -DSPEC_USE_INNER_SIMD
556.psp: -DSPEC_USE_INNER_SIMD
557.pcsp: -DSPEC_USE_INNER_SIMD
559.pmniGhost: -DSPEC_USE_INNER_SIMD -nofor-main
560.pilbdc: -DSPEC_USE_INNER_SIMD
563.pswim: -DSPEC_USE_INNER_SIMD
570.pbt: -DSPEC_USE_INNER_SIMD

Base Optimization Flags

C benchmarks:
-O3 -xMIC-AVX512 -g -qopenmp -qopenmp-offload=host -qopt-report=5

Fortran benchmarks:
-O3 -xMIC-AVX512 -g -qopenmp -qopenmp-offload=host -qopt-report=5

Benchmarks using both Fortran and C:
-O3 -xMIC-AVX512 -g -qopenmp -qopenmp-offload=host -qopt-report=5

The flags file that was used to format this result can be browsed at
https://www.spec.org/accel/flags/percival_intel_17.0.0_flags.html

You can also download the XML flags source by saving the following link:
https://www.spec.org/accel/flags/percival_intel_17.0.0_flags.xml

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC ACCEL v75.
Report generated on Wed Jun 21 17:15:29 2017 by SPEC ACCEL PS/PDF formatter v1290.
Originally published on 21 June 2017.