




CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

IBM Corporation
IBM eServer pSeries 655 (1700 MHz, 8 CPU)

SPECfp_rate2000 = 111
SPECfp_rate_base2000 = 103

SPEC license #: 11 | Tested by: IBM Austin | Test date: Dec-2003 | Hardware Avail: Feb-2004 | Software Avail: Oct-2003

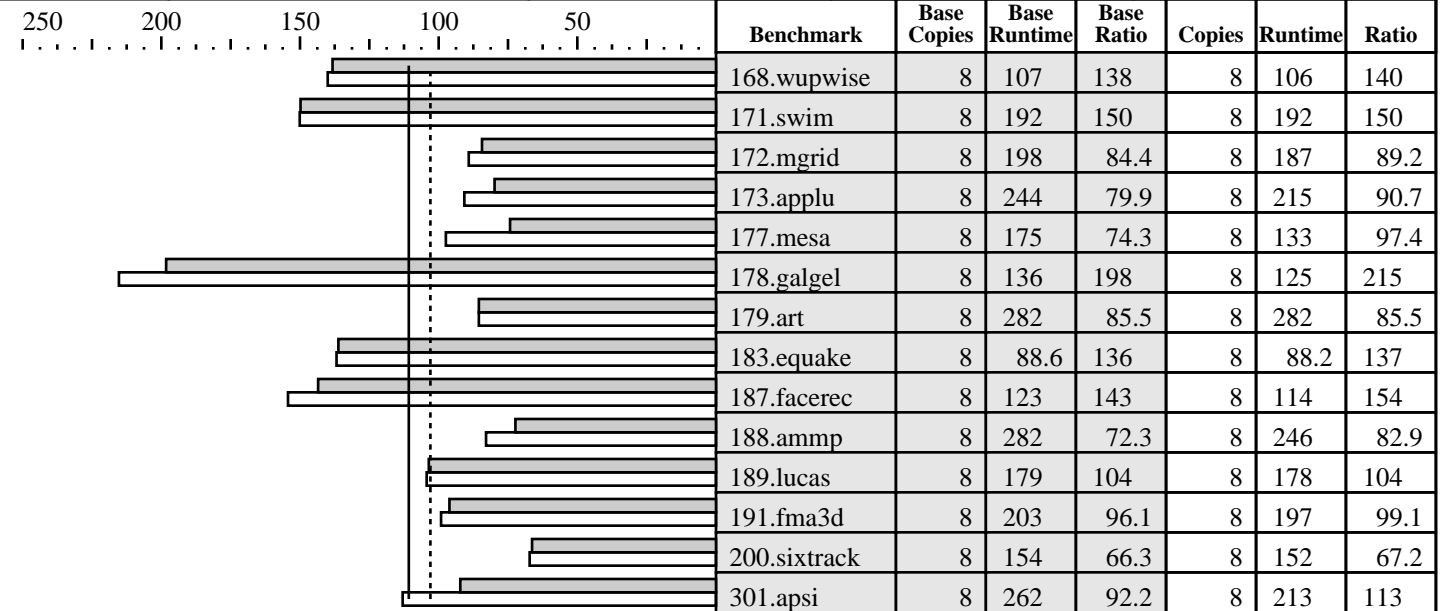

Hardware

CPU: POWER4+
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip, 4 chips/MCM
 CPU(s) orderable: 4,8 (order by # cores)
 Parallel: No
 Primary Cache: 64KBI+32KBD (on chip) per core
 Secondary Cache: 1536KB unified (on chip) per chip
 L3 Cache: 128MB unified (off-chip) per MCM, 1 MCM in SUT (4 chips per MCM)
 Other Cache: None
 Memory: 32 GB
 Disk Subsystem: 2x36GB SCSI, 10K RPM
 Other Hardware: None

Software

Operating System: AIX 5L V5.2 5765-E62 (05/2003)
 Compiler: IBM C for AIX, Version 6.0
 IBM XL FORTRAN for AIX, Version 8.1.1.0
 Other Software: ESSL 4.1.0.0, MASS 3.2.1
 File System: AIX/JFS2
 System State: Multi-User

Notes/Tuning Information

Portability Flags

-qfixed used in: 168.wupwise, 171.swim, 172.mgrid, 173.applu,
 178.galgel, 200.sixtrack, 301.apsi
 -qsuffix=f=f90 used in: 178.galgel, 187.facerec, 189.lucas, 191.fma3d

Base Optimization Flags:

C: -O5 -qalign=natural -blpdata -D_ILS_MACROS
 Fortran: -O5 -qalign=natural -blpdata -lmass

Peak Optimization Flags

168.wupwise: -O5 -qipa=partition=large -q64 -qarch=pwr4 -qtune=pwr4
 171.swim: -qpdf1/qpdf2 -O4 -blpdata -qarch=pwr4 -qtune=pwr4
 172.mgrid: fdpr -v -R3
 -O5 -qarch=pwr3 -qtune=pwr3 -blpdata -qalign=natural
 173.applu: -O4 -qarch=pwr3 -qtune=pwr3 -blpdata



CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

IBM Corporation
IBM eServer pSeries 655 (1700 MHz, 8 CPU)

SPECfp_rate2000 = 111
SPECfp_rate_base2000 = 103

SPEC license #: 11 | Tested by: IBM Austin | Test date: Dec-2003 | Hardware Avail: Feb-2004 | Software Avail: Oct-2003

Notes/Tuning Information (Continued)

```

177.mesa: -qpdf1/pdf2
          fdpr -v -R3
          -O3 -blpdata -qipa=level=2 -qalign=natural -qarch=pwr3 -qtune=pwr3
178.galgel: -qpdf1/pdf2
            -O5 -blpdata -qessl -lessl -qarch=pwr4 -qtune=pwr4
179.art: basepeak = 1
183.earthquake: fdpr -v -R3
                -O5 -blpdata -qalign=natural -qarch=pwr4 -qtune=pwr4 -qfdpr
187.facerec: -qpdf1/pdf2
             fdpr -v -R3
             -O5 -qarch=pwr3 -qtune=pwr3 -lmass -blpdata
188.ammp: -qpdf1/pdf2 -L/usr/vac/lib
          fdpr -v -R3
          -O5 -blpdata -qalign=natural -qipa=partition=large -qarch=pwr4 -qtune=pwr4
189.lucas: -O3 -qarch=pwr3 -qtune=pwr3 -blpdata -qipa=level=2 -qalign=natural
191.fma3d: -O3 -lhm -qarch=pwr3 -qtune=pwr3 -blpdata -qipa=level=2 -qalign=natural
200.sixtrack: -O3 -qhot -qarch=pwr4 -qtune=pwr4
301.apsi: fdpr -v -R3
          -O5 -lmass -qalign=natural -qessl -lessl -blpdata -qfdpr
          -qarch=pwr4 -qtune=pwr4 -qsave

```

C: IBM VAC++ invoked as xlc
Fortran 77 and 90: IBM XL Fortran for AIX invoked as xlf90.

fpdr: Feedback directed program restructuring tool
ulimits set to unlimited.
Large page mode and memory affinity were set as follows:
vmo -r -o lpgg_regions=400 -o lpgg_size=16777216 -o memory_affinity=1
chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE \$USER
shutdown -r
export MEMORY_AFFINITY=MCM

MCM: Acronym for "Multi-Chip Module"
SUT: Acronym for "System Under Test"

Form used to submit "rate" runs:
submit = let "MYCPU=\\$SPECUSERNUM"; bindprocessor \\$\\$ \\$MYCPU; \$command