CFP2000 Result

Sun Microsystems
Sun Fire E6900 (16 processor)

SPECfp_rate2000 = 221

SPECfp_rate_base2000 = 179

SPEC license #: 6	Tested by: Sun Microsystems	Test date: Apr-2004	Hardware Avail: Mar-2004	Software Avail: Apr-2004

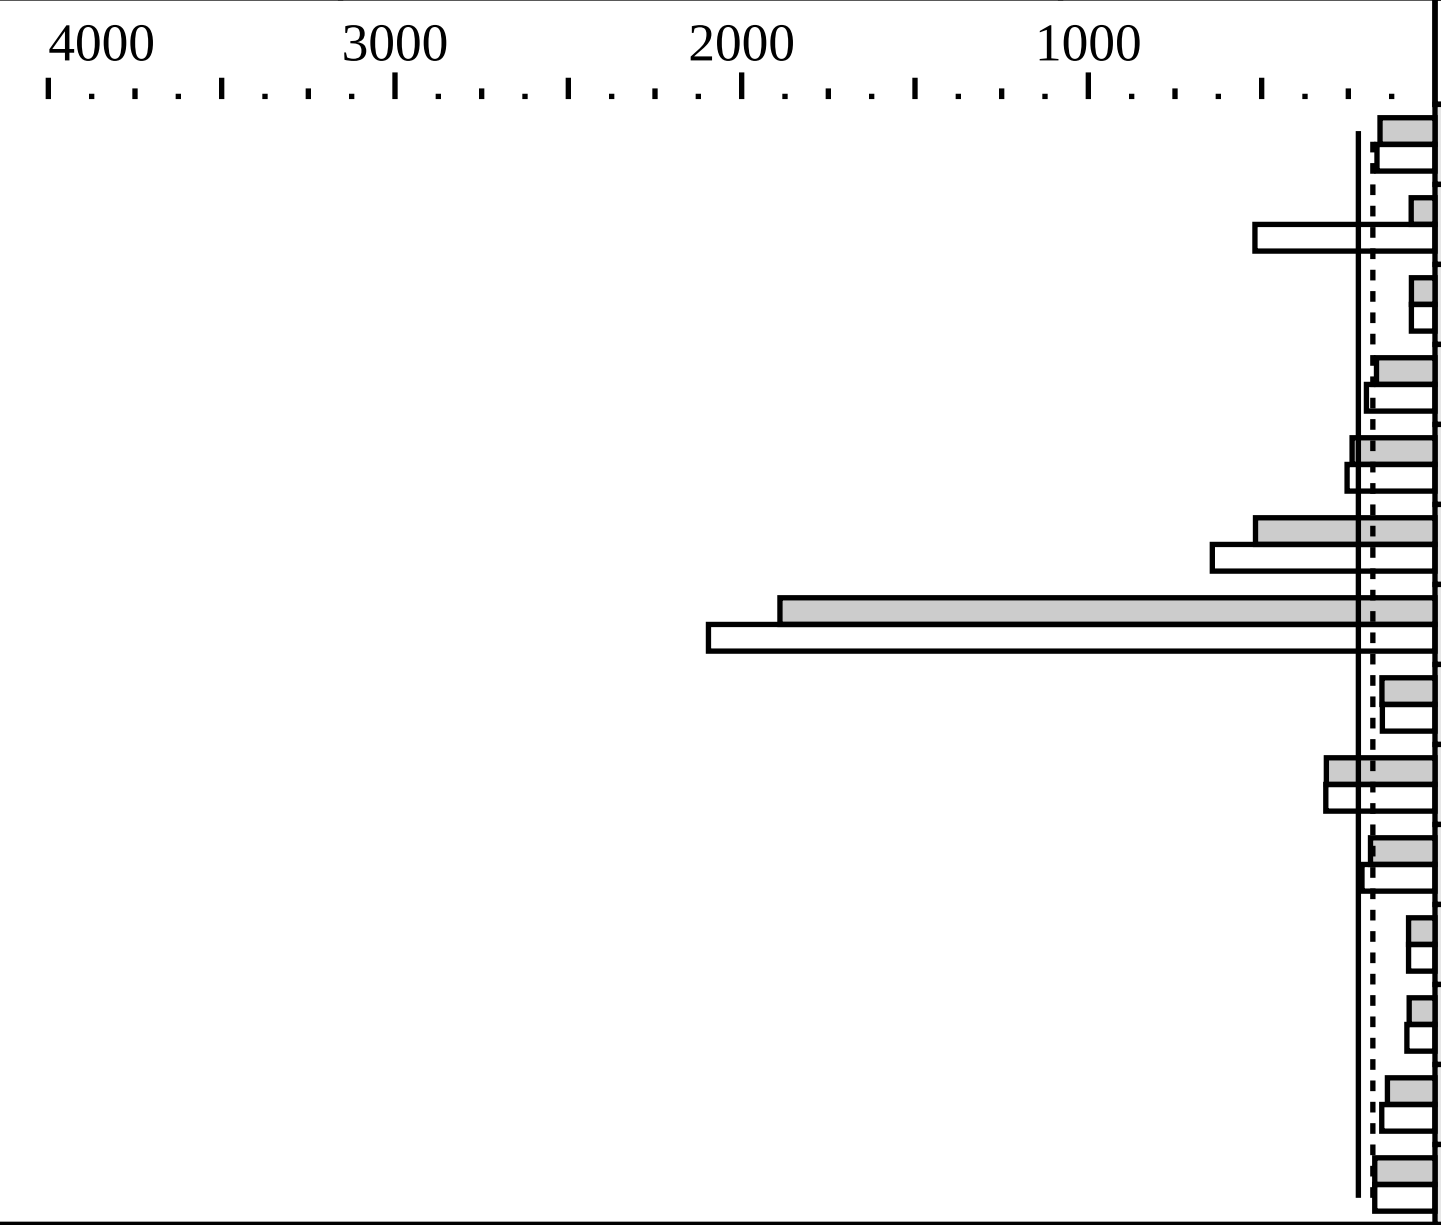

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	32	374	159	32	355	167
171.swim	32	1675	68.7	32	222	519
172.mgrid	32	983	68.0	32	981	68.1
173.applu	32	462	169	32	394	198
177.mesa	32	217	239	32	205	254
178.galgel	32	208	518	32	168	642
179.art	32	51.1	1890	32	46.1	2096
183.equake	32	315	153	32	318	152
187.facerec	32	225	313	32	224	315
188.ammp	32	439	186	32	388	211
189.lucas	32	974	76.3	32	974	76.3
191.fma3d	32	1047	74.5	32	961	81.1
200.sixtrack	32	298	137	32	266	154
301.apsi	32	555	174	32	555	174

Hardware

CPU:	UltraSPARC s400
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	32 cores, 16 chips, 2 cores/chip
CPU(s) orderable:	4, 8, 12, 16, 20, 24 (order by # chips)
Parallel:	No
Primary Cache:	32KBI+64KBD per core on chip (64KBI+128KBD on chip)
Secondary Cache:	8MB(I+D) per core off chip (16MB(I+D) off chip)
L3 Cache:	None
Other Cache:	None
Memory:	64GB 16-way interleaved
Disk Subsystem:	Sun StorEdge S1 Disk Array (2x36GB) Sun StorEdge T3 Array for the Workgroup (9x36GB)
Other Hardware:	None

Software

Operating System:	Solaris 9 04/04
Compiler:	Sun ONE Studio 8 Sun Performance Library 8
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f77

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
  ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

  168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
```

CFP2000 Result

Sun Microsystems
Sun Fire E6900 (16 processor)

SPECfp_rate2000 = 221
SPECfp_rate_base2000 = 179

SPEC license #: 6	Tested by: Sun Microsystems	Test date: Apr-2004	Hardware Avail: Mar-2004	Software Avail: Apr-2004

Notes/Tuning Information (Continued)

```
  171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
               -Qoption iropt -Atile:skewp,-Ainline:cs=700
               (no feedback)
  172.mgrid:   -fast -xipo=2
  173.applu:   -fast -xipo=2
               -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
               -Qoption iropt -Aujam:inner=g
  177.mesa:    -fast -xipo=2 -xalias_level=strong -xrestrict
               -Wc,-Qms_pipe+unoovf
  178.galgel:  -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
               RM_SOURCES=lapak.f90
  179.art:     -fast -xipo=2 -xalias_level=std
               -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
  183.equake:  -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
  187.facerec: -fast -xipo=2
  188.ammp:    -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm
  189.lucas:   basepeak=yes
  191.fma3d:   -fast -xipo=2 -stackvar -xprefetch_level=3
               -Qoption iropt -Apf:pdl=1
  200.sixtrack:-O -dalign -xchip=ultra3 -xarch=v8plusb -fsimple=2
  301.apsi:    -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
  fdo_pre0:    rm -rf ./feedback.profile ./SunWS_cache
  PASS1:       -xprofile=collect:./feedback
  PASS2:       -xprofile=use:./feedback

Portability:
  178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind

The system was configured with multiple file systems.
The O/S was installed on one disk of the Sun StorEdge S1
Disk Array (ufs, ufs w/logging).  The benchmark was run on
the Sun StorEdge T3 Array, using H/W Raid 5 and ufs with
ufs logging file system.
```