



SPEC® CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 380 (3.8 GHz, Pentium 4 processor 670)

SPECint®2006 = --

SPECint_base2006 = 11.5

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2006

Hardware Availability: Jun-2005

Software Availability: May-2006

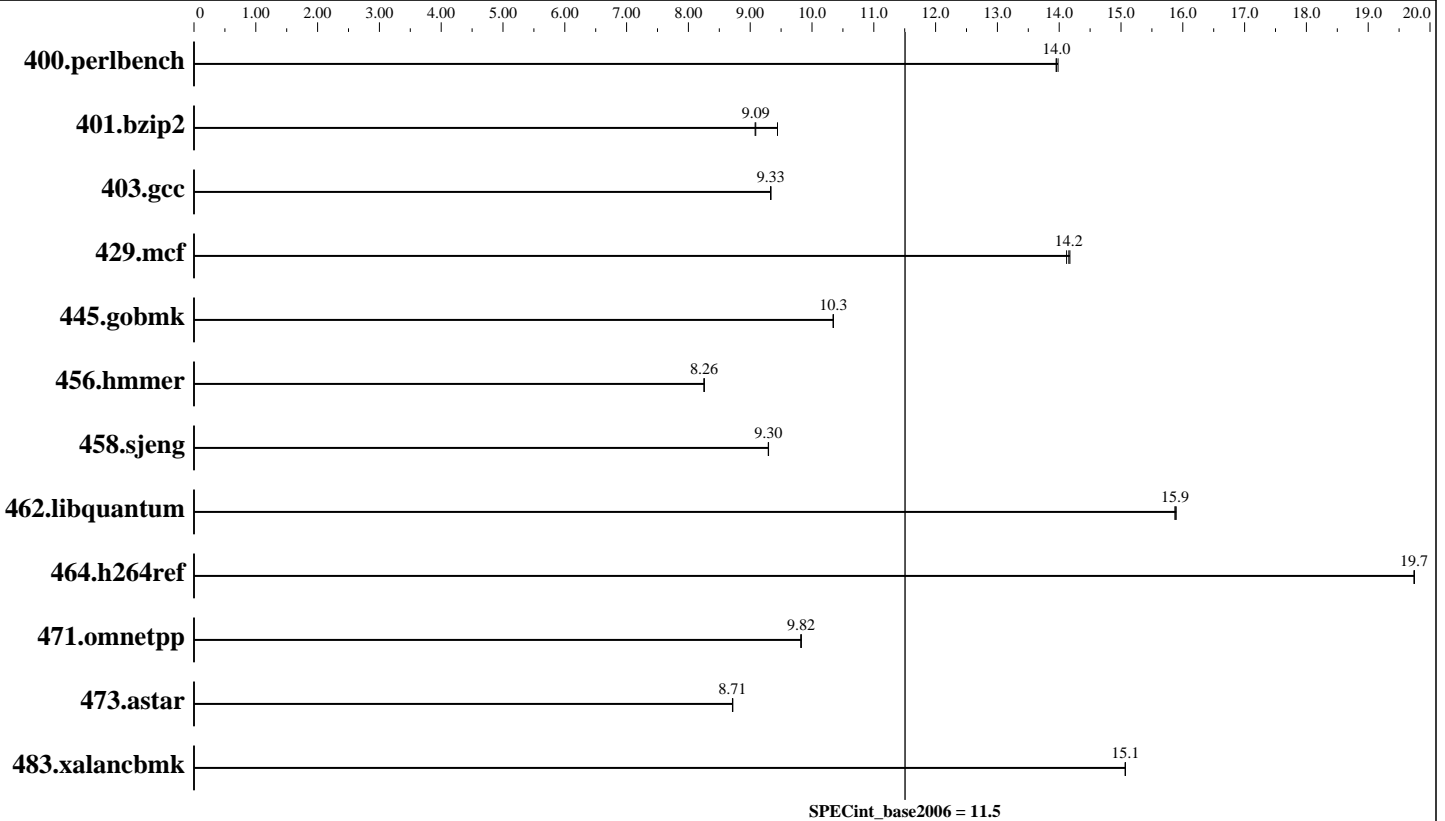

Hardware

CPU Name: Intel Pentium 4 670
 CPU Characteristics:
 CPU MHz: 3800
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 1 core/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per chip
 Secondary Cache: 2 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 2 GB (4x512 MB 533MHz CL4 DDR2 SDRAM)
 Disk Subsystem: 1 x 80GB SATA 7200 RPM
 Other Hardware: None

Software

Operating System: Windows XP Professional x64 Edition
 Compiler: Intel C++ Compiler 9.1 for IA32 (20060323Z)
 Microsoft Visual Studio .NET 2003
 MicroQuill SmartHeap Library 7.4
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: Not Applicable
 Other Software: None



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 380 (3.8 GHz, Pentium 4 processor 670)

SPECint2006 = --

SPECint_base2006 = 11.5

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2006

Hardware Availability: Jun-2005

Software Availability: May-2006

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	699	14.0	700	14.0	<u>700</u>	<u>14.0</u>						
401.bzip2	1022	9.44	1063	9.08	<u>1062</u>	<u>9.09</u>						
403.gcc	862	9.33	863	9.33	<u>863</u>	<u>9.33</u>						
429.mcf	646	14.1	643	14.2	<u>644</u>	<u>14.2</u>						
445.gobmk	1014	10.3	1014	10.3	<u>1014</u>	<u>10.3</u>						
456.hammer	1130	8.26	1130	8.25	<u>1130</u>	<u>8.26</u>						
458.sjeng	<u>1302</u>	<u>9.30</u>	1301	9.30	1302	9.29						
462.libquantum	1304	15.9	<u>1305</u>	<u>15.9</u>	1305	15.9						
464.h264ref	1121	19.7	1121	19.7	<u>1121</u>	<u>19.7</u>						
471.omnetpp	636	9.83	<u>636</u>	<u>9.82</u>	636	9.82						
473.astar	<u>806</u>	<u>8.71</u>	805	8.72	806	8.71						
483.xalancbmk	458	15.1	458	15.1	<u>458</u>	<u>15.1</u>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
473.astar: -DSPEC_CPU_LITTLE_ENDIAN

Base Optimization Flags

C benchmarks:

-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:

-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 380 (3.8 GHz, Pentium 4 processor 670)

SPECint2006 = --

SPECint_base2006 = 11.5

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2006

Hardware Availability: Jun-2005

Software Availability: May-2006

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic91-flags-file-20060622.xml.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic91-flags-file-20060622.xml.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v90.
Report generated on Sat Dec 15 21:12:56 2007 by SPEC CPU2006 PS/PDF formatter v5614.