



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp<sup>®</sup>\_rate2006 = 48.3

Thunder n4250QE (S4985) Opteron 2220 SE

SPECfp\_rate\_base2006 = 45.4

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: AMD

Test date: Jul-2006

Hardware Availability: Oct-2006

Software Availability: Aug-2006

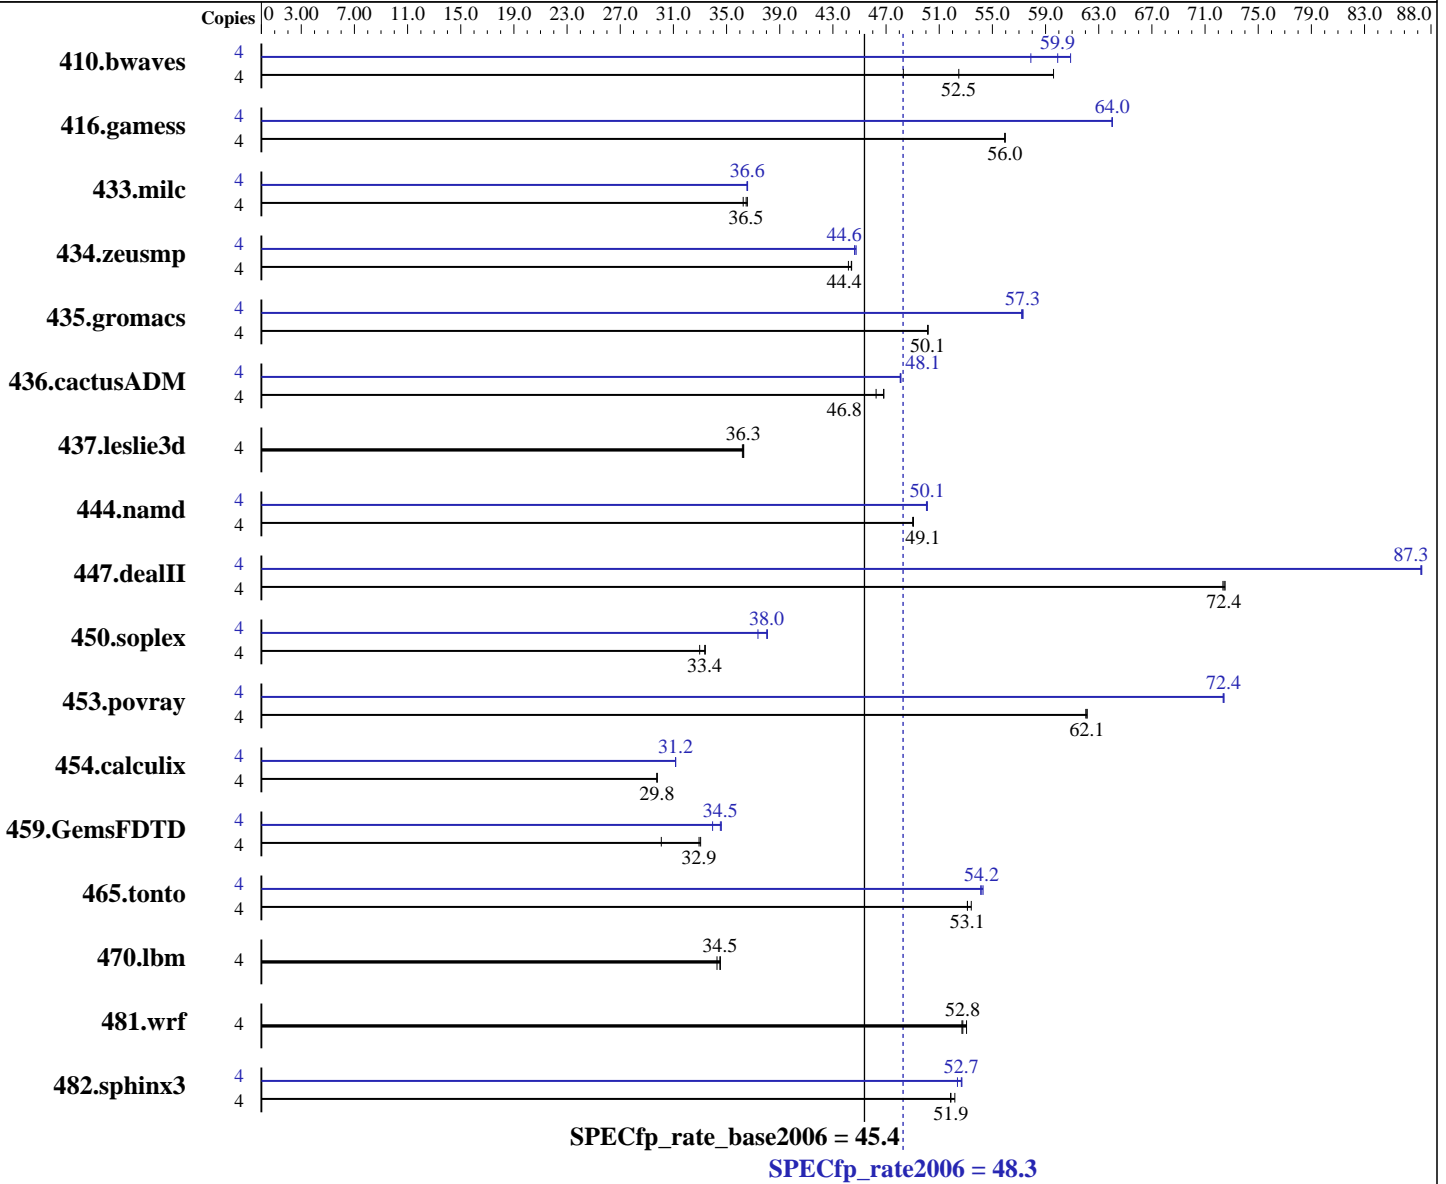

### Hardware

CPU Name: AMD Opteron 2220 SE  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 9 SP3 64-bit kernel  
 Compiler: QLogic PathScale  
 Compiler Suite, Release 2.5  
 SmartHeap 8.0 32 bit Library for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-user, run level 3  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp\_rate2006 = 48.3

Thunder n4250QE (S4985) Opteron 2220 SE

SPECfp\_rate\_base2006 = 45.4

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: AMD

Test date: Jul-2006

Hardware Availability: Oct-2006

Software Availability: Aug-2006

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (8x1GB, DDR2-667 CL4 ECC Reg Dual Rank)  
Disk Subsystem: SATA, 74 GB  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	1125	48.3	<b>1036</b>	<b>52.5</b>	912	59.6	4	<b>907</b>	<b>59.9</b>	893	60.9	939	57.9		
416.gamess	4	<b>1400</b>	<b>56.0</b>	1400	56.0	1400	55.9	4	<b>1223</b>	<b>64.0</b>	1224	64.0	1223	64.0		
433.milc	4	1004	36.6	<b>1007</b>	<b>36.5</b>	1013	36.3	4	1004	36.6	1005	36.5	<b>1004</b>	<b>36.6</b>		
434.zeusmp	4	824	44.2	820	44.4	<b>820</b>	<b>44.4</b>	4	<b>815</b>	<b>44.6</b>	813	44.7	815	44.6		
435.gromacs	4	569	50.2	<b>570</b>	<b>50.1</b>	570	50.1	4	<b>499</b>	<b>57.3</b>	499	57.2	498	57.3		
436.cactusADM	4	1033	46.3	<b>1021</b>	<b>46.8</b>	1021	46.8	4	993	48.1	<b>994</b>	<b>48.1</b>	994	48.1		
437.leslie3d	4	1036	36.3	1039	36.2	<b>1037</b>	<b>36.3</b>	4	1036	36.3	1039	36.2	<b>1037</b>	<b>36.3</b>		
444.namd	4	654	49.1	655	49.0	<b>654</b>	<b>49.1</b>	4	641	50.0	640	50.1	<b>640</b>	<b>50.1</b>		
447.dealII	4	<b>632</b>	<b>72.4</b>	633	72.3	631	72.5	4	525	87.2	<b>524</b>	<b>87.3</b>	524	87.3		
450.soplex	4	<b>1000</b>	<b>33.4</b>	1012	33.0	999	33.4	4	893	37.4	876	38.1	<b>877</b>	<b>38.0</b>		
453.povray	4	<b>343</b>	<b>62.1</b>	343	62.0	343	62.1	4	294	72.4	294	72.4	<b>294</b>	<b>72.4</b>		
454.calculix	4	1109	29.8	1108	29.8	<b>1108</b>	<b>29.8</b>	4	1059	31.2	1059	31.2	<b>1059</b>	<b>31.2</b>		
459.GemsFDTD	4	1411	30.1	<b>1289</b>	<b>32.9</b>	1284	33.0	4	1226	34.6	1250	33.9	<b>1229</b>	<b>34.5</b>		
465.tonto	4	741	53.1	737	53.4	<b>741</b>	<b>53.1</b>	4	<b>726</b>	<b>54.2</b>	727	54.1	725	54.3		
470.lbm	4	<b>1593</b>	<b>34.5</b>	1591	34.5	1603	34.3	4	<b>1593</b>	<b>34.5</b>	1591	34.5	1603	34.3		
481.wrf	4	848	52.7	842	53.1	<b>847</b>	<b>52.8</b>	4	848	52.7	842	53.1	<b>847</b>	<b>52.8</b>		
482.sphinx3	4	1503	51.9	1494	52.2	<b>1503</b>	<b>51.9</b>	4	<b>1480</b>	<b>52.7</b>	1489	52.4	1479	52.7		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

taskset utility used to bind CPU(s) to processes  
All memory slots filled on all chips

The tested system can be assembled using any SSI-MEB case and a Silverstone Zeus 650 watt ST65ZF ATX 12V Power Supply.

## Base Compiler Invocation

C benchmarks:  
pathcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 48.3**

**Thunder n4250QE (S4985) Opteron 2220 SE**

**SPECfp\_rate\_base2006 = 45.4**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** AMD

**Test date:** Jul-2006

**Hardware Availability:** Oct-2006

**Software Availability:** Aug-2006

## Base Compiler Invocation (Continued)

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_TABLE\_WORKAROUND  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-Ofast

C++ benchmarks:  
-Ofast

Fortran benchmarks:  
-Ofast

Benchmarks using both Fortran and C:  
-Ofast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 48.3**

**Thunder n4250QE (S4985) Opteron 2220 SE**

**SPECfp\_rate\_base2006 = 45.4**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** AMD

**Test date:** Jul-2006

**Hardware Availability:** Oct-2006

**Software Availability:** Aug-2006

## Base Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

Fortran benchmarks:

-IPA:max\_jobs=2

Benchmarks using both Fortran and C:

-IPA:max\_jobs=2

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_TABLE\_WORKAROUND  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 48.3**

**Thunder n4250QE (S4985) Opteron 2220 SE**

**SPECfp\_rate\_base2006 = 45.4**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** AMD

**Test date:** Jul-2006

**Hardware Availability:** Oct-2006

**Software Availability:** Aug-2006

## Peak Optimization Flags

### C benchmarks:

433.milc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

470.lbm: basepeak = yes

482.sphinx3: Same as 433.milc

### C++ benchmarks:

444.namd: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

447.dealIII: -Ofast -m32 -fno-exceptions

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:IEEE\_arith=3 -CG:load\_exe=0 -CG:movnti=1  
-LNO:minvariant=off -fno-exceptions

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-fast-math

### Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -OPT:IEEE\_arith=3 -LNO:blocking=off  
-LNO:ignore\_feedback=off

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O2  
-OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

434.zeusmp: -Ofast -CG:local\_fwd\_sched=on -LNO:blocking=off  
-LNO:interchange=off -LNO:fu=10 -LNO:full\_unroll\_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: -Ofast -CG:local\_fwd\_sched=on -IPA:plimit=525

### Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-LNO:prefetch\_ahead=5 -LNO:ou\_prod\_max=10 -LNO:full\_unroll=5  
-ipa

454.calculix: -Ofast -CG:prefetch=off -LNO:simd=0 -OPT:unroll\_times\_max=8  
-WOPT:mem\_opnds=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 48.3**

**Thunder n4250QE (S4985) Opteron 2220 SE**

**SPECfp\_rate\_base2006 = 45.4**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** AMD

**Test date:** Jul-2006

**Hardware Availability:** Oct-2006

**Software Availability:** Aug-2006

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

Fortran benchmarks:

-IPA:max\_jobs=2

Benchmarks using both Fortran and C:

-IPA:max\_jobs=2

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.25.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.25.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 10:42:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 January 2007.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 6