



SPEC® CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Bull SAS

SPECint®2006 = 15.7

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

SPECint_base2006 = 15.1

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Dec-2006

Software Availability: Dec-2006

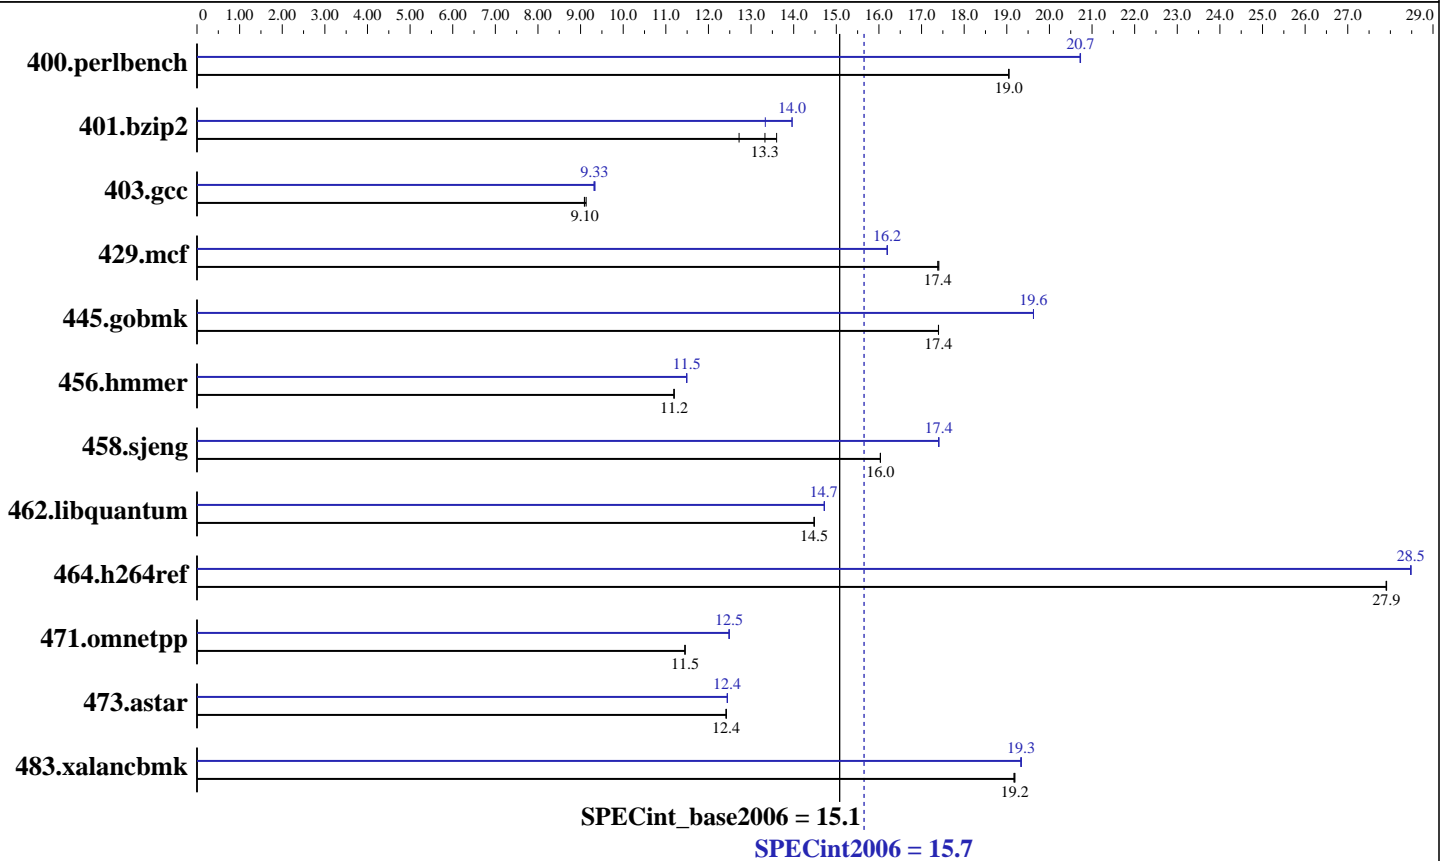

Hardware

CPU Name: Intel Xeon 5150
 CPU Characteristics: 2.66 GHz, 4MB L2, 1333MHz bus
 CPU MHz: 2660
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 to 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (2GB DIMMx4, FB-DIMM PC2-5300F ECC CL5)
 Disk Subsystem: 73 GB SAS, 10000RPM
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1
 Compiler: Intel C++ Compiler for IA32 version 9.1
 Package ID W_CC_C_9.1.033 Build no 20061103Z
 Microsoft Visual Studio .NET 2003 (lib & linker)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 15.7

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

SPECint_base2006 = 15.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Dec-2006
Hardware Availability: Dec-2006
Software Availability: Dec-2006

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	513	19.0	513	19.0	<u>513</u>	<u>19.0</u>	472	20.7	471	20.7	<u>471</u>	<u>20.7</u>
401.bzip2	<u>724</u>	<u>13.3</u>	759	12.7	710	13.6	691	14.0	724	13.3	<u>691</u>	<u>14.0</u>
403.gcc	882	9.13	<u>885</u>	<u>9.10</u>	886	9.09	862	9.34	864	9.31	<u>863</u>	<u>9.33</u>
429.mcf	524	17.4	525	17.4	<u>525</u>	<u>17.4</u>	563	16.2	<u>563</u>	<u>16.2</u>	563	16.2
445.gobmk	603	17.4	603	17.4	<u>603</u>	<u>17.4</u>	534	19.6	<u>534</u>	<u>19.6</u>	535	19.6
456.hammer	834	11.2	834	11.2	<u>834</u>	<u>11.2</u>	<u>812</u>	<u>11.5</u>	812	11.5	812	11.5
458.sjeng	755	16.0	<u>755</u>	<u>16.0</u>	755	16.0	695	17.4	695	17.4	<u>695</u>	<u>17.4</u>
462.libquantum	1431	14.5	<u>1431</u>	<u>14.5</u>	1431	14.5	1408	14.7	<u>1408</u>	<u>14.7</u>	1408	14.7
464.h264ref	<u>793</u>	<u>27.9</u>	793	27.9	793	27.9	<u>777</u>	<u>28.5</u>	777	28.5	777	28.5
471.omnetpp	546	11.4	<u>546</u>	<u>11.5</u>	546	11.5	501	12.5	501	12.5	<u>501</u>	<u>12.5</u>
473.astar	<u>565</u>	<u>12.4</u>	565	12.4	565	12.4	564	12.4	564	12.4	<u>564</u>	<u>12.4</u>
483.xalancbmk	<u>360</u>	<u>19.2</u>	360	19.2	360	19.2	357	19.3	357	19.3	<u>357</u>	<u>19.3</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Other Configuration Notes
/NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment

Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
473.astar: -DSPEC_CPU_LITTLE_ENDIAN

Base Optimization Flags

C benchmarks:
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 15.7

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

SPECint_base2006 = 15.1

CPU2006 license: 20

Test date: Dec-2006

Test sponsor: Bull SAS

Hardware Availability: Dec-2006

Tested by: Bull SAS

Software Availability: Dec-2006

Base Optimization Flags (Continued)

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE
```

Peak Optimization Flags

C benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE
```

C++ benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```

Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.xml.20070206.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.xml.20070206.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Sat Dec 15 22:30:47 2007 by SPEC CPU2006 PS/PDF formatter v5614.