SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint®_rate2006 = 53.7

SPECint_rate_base2006 = 49.6

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2007
Hardware Availability: Feb-2007
Software Availability: Feb-2007

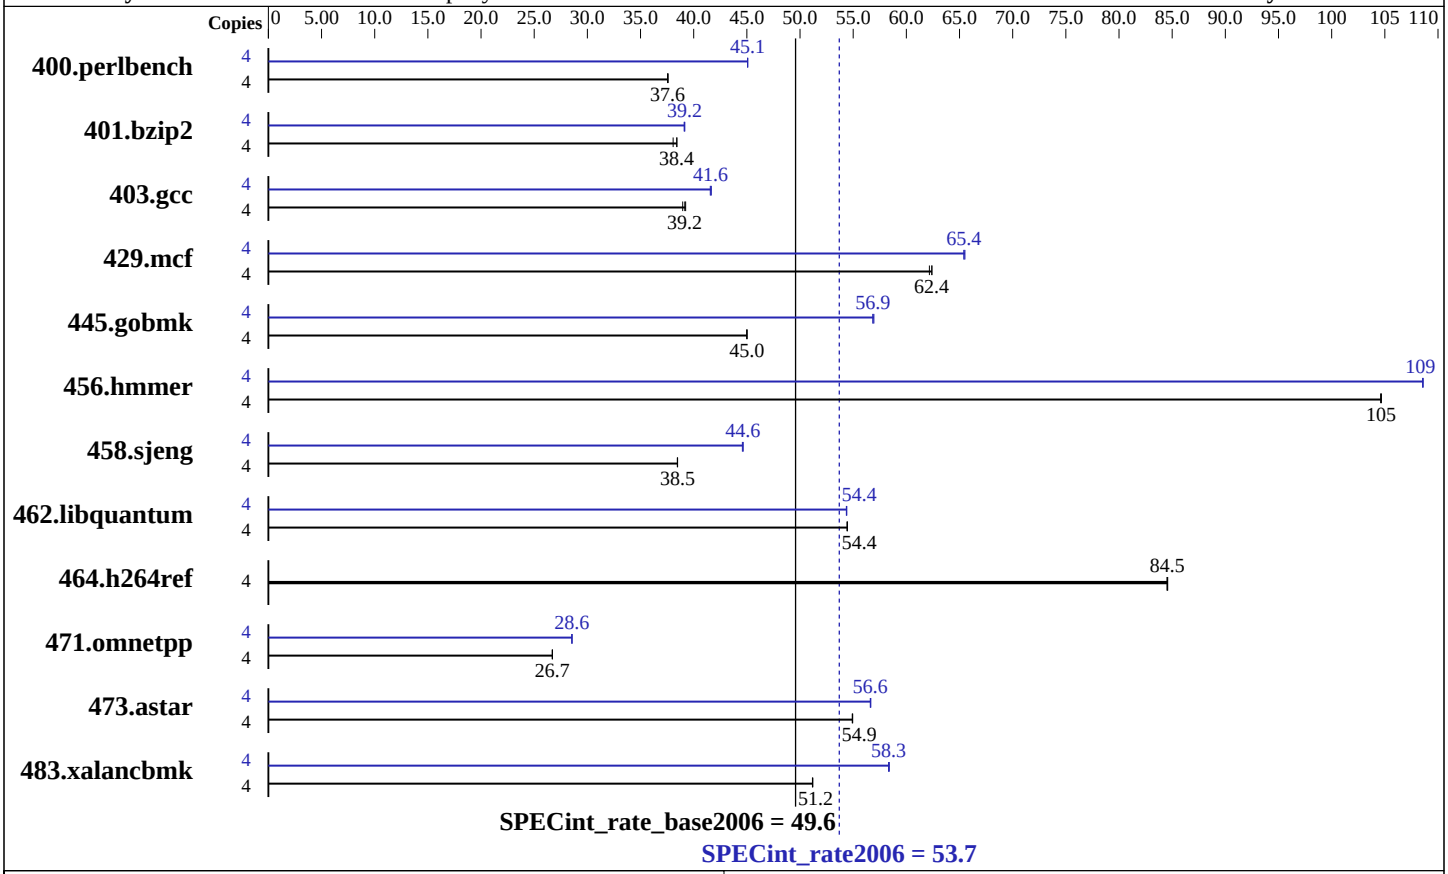

Hardware

CPU Name:	Dual-Core Intel Itanium 2 9040
CPU Characteristics:	1.6GHz/18MB, 533MHz FSB
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1-2 chips
Primary Cache:	16 KB I + 16 KB D on chip per core
Secondary Cache:	1 MB I + 256 KB D on chip per core
L3 Cache:	9 MB I+D on chip per core
Other Cache:	None
Memory:	8 GB (4x2GB DIMMs)
Disk Subsystem:	73GB 10K RPM SAS
Other Hardware:	None

Software

Operating System:	HPUX11i-TCOE B.11.23.0609
Compiler:	HP C/aC++ Developer's Bundle C.11.23.12
Auto Parallel:	No
File System:	vxfs
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill Smartheap 8.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 53.7

SPECint_rate_base2006 = 49.6

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2007
Hardware Availability: Feb-2007
Software Availability: Feb-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	**1041**	**37.6**	1040	37.6	1041	37.6	4	**867**	**45.1**	867	45.1	867	45.1
401.bzip2	4	1014	38.1	1005	38.4	**1005**	**38.4**	4	987	39.1	986	39.2	**986**	**39.2**
403.gcc	4	826	39.0	**822**	**39.2**	821	39.2	4	**774**	**41.6**	773	41.7	775	41.6
429.mcf	4	587	62.2	585	62.4	**585**	**62.4**	4	**558**	**65.4**	558	65.4	557	65.5
445.gobmk	4	932	45.0	**932**	**45.0**	933	45.0	4	738	56.8	**738**	**56.9**	737	56.9
456.hmmer	4	357	105	**357**	**105**	357	105	4	344	109	344	109	**344**	**109**
458.sjeng	4	1258	38.5	1258	38.5	**1258**	**38.5**	4	1084	44.6	**1084**	**44.6**	1086	44.6
462.libquantum	4	1522	54.4	1522	54.4	**1522**	**54.4**	4	**1524**	**54.4**	1524	54.4	1525	54.4
464.h264ref	4	1047	84.5	**1047**	**84.5**	1047	84.6	4	1047	84.5	**1047**	**84.5**	1047	84.6
471.omnetpp	4	936	26.7	936	26.7	**936**	**26.7**	4	**876**	**28.6**	875	28.6	876	28.5
473.astar	4	511	55.0	**511**	**54.9**	511	54.9	4	496	56.7	496	56.6	**496**	**56.6**
483.xalancbmk	4	539	51.2	539	51.2	**539**	**51.2**	4	473	58.4	**473**	**58.3**	473	58.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
The system had the September 2006 HP-UX 11i v2 Technical Computing
Operating Environment (TCOE) and compilers installed, along with
the following patches:

PHSS_34858  linker + fdp cumulative patch
PHSS_34853  Math Library Cumulative Patch
PHSS_34854  Integrity Unwind Library
PHSS_34855  HP C Compiler (A.06.12)
PHSS_34856  aC++ Compiler (A.06.12)
PHSS_34857  u2comp/be/plugin library patch
PHSS_34395  FORTRAN I/O Library [libIO77]
PHSS_34397  FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399  Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020  Perfmon enhancements and Itanium Dual-Core

The following kernel tunables were set, in addition to the defaults
set by the Technical Computing OE:

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Base Compiler Invocation

C benchmarks:
```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:
```
/opt/aCC/bin/aCC -Aa
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Base Optimization Flags

C benchmarks:
```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

C++ benchmarks:
```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a
```

Peak Compiler Invocation

C benchmarks:
```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:
```
/opt/aCC/bin/aCC -Aa
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

473.astar: +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.07.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.07.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 53.7

SPECint_rate_base2006 = 49.6

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2007
Hardware Availability: Feb-2007
Software Availability: Feb-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:20:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2007.