



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp[®]_rate2006 = 48.1

Tyan Thunder n4250QE (S4985) Opteron 2220

SPECfp_rate_base2006 = 45.6

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2006

Hardware Availability: Feb-2007

Software Availability: Aug-2006

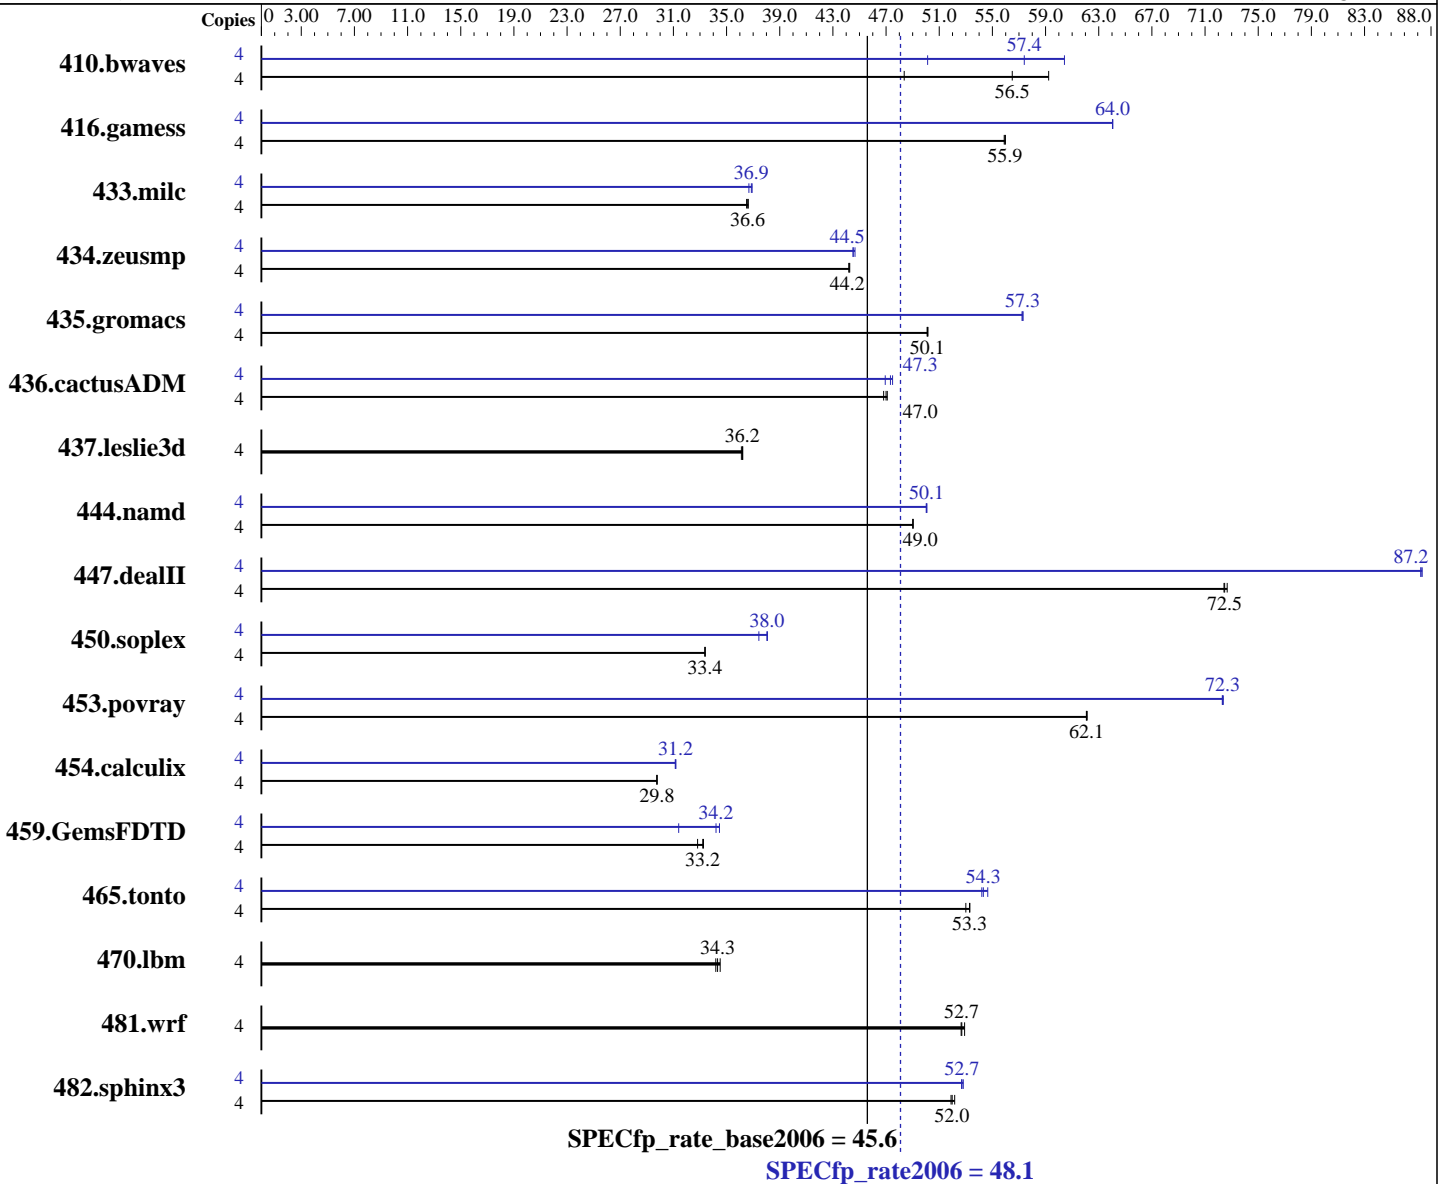

Hardware

CPU Name: AMD Opteron 2220
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SuSE SLES9SP3 64-bit kernel
 Compiler: QLogic PathScale
 Compiler Suite, Release 2.5
 SmartHeap 8.0 32 bit Library for Linux
 Auto Parallel: No
 File System: ext3
 System State: Multi-user, run level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 48.1

Tyan Thunder n4250QE (S4985) Opteron 2220

SPECfp_rate_base2006 = 45.6

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2006

Hardware Availability: Feb-2007

Software Availability: Aug-2006

L3 Cache: None
Other Cache: None
Memory: 8 GB (8x1GB, DDR2-667 CL4 ECC Reg Dual Rank)
Disk Subsystem: SATA, 74 GB
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1124	48.4	918	59.2	<u>962</u>	<u>56.5</u>	4	<u>947</u>	<u>57.4</u>	1084	50.1	900	60.4
416.gamess	4	1401	55.9	<u>1400</u>	<u>55.9</u>	1399	56.0	4	1223	64.0	1223	64.1	<u>1223</u>	<u>64.0</u>
433.milc	4	1002	36.6	1006	36.5	<u>1004</u>	<u>36.6</u>	4	994	36.9	<u>996</u>	<u>36.9</u>	1001	36.7
434.zeusmp	4	823	44.2	<u>823</u>	<u>44.2</u>	822	44.3	4	<u>818</u>	<u>44.5</u>	818	44.5	815	44.7
435.gromacs	4	570	50.1	<u>570</u>	<u>50.1</u>	569	50.2	4	499	57.2	<u>499</u>	<u>57.3</u>	498	57.3
436.cactusADM	4	1015	47.1	<u>1017</u>	<u>47.0</u>	1021	46.8	4	1018	46.9	1007	47.5	<u>1010</u>	<u>47.3</u>
437.leslie3d	4	1038	36.2	1041	36.1	<u>1039</u>	<u>36.2</u>	4	1038	36.2	1041	36.1	<u>1039</u>	<u>36.2</u>
444.namd	4	654	49.0	<u>654</u>	<u>49.0</u>	654	49.0	4	<u>641</u>	<u>50.1</u>	641	50.0	641	50.1
447.dealII	4	632	72.4	<u>631</u>	<u>72.5</u>	630	72.7	4	524	87.3	525	87.2	<u>525</u>	<u>87.2</u>
450.soplex	4	<u>1000</u>	<u>33.4</u>	1000	33.4	999	33.4	4	<u>877</u>	<u>38.0</u>	891	37.4	876	38.1
453.povray	4	343	62.1	343	62.1	<u>343</u>	<u>62.1</u>	4	294	72.3	<u>294</u>	<u>72.3</u>	294	72.4
454.calculix	4	1108	29.8	<u>1109</u>	<u>29.8</u>	1109	29.8	4	1060	31.1	<u>1059</u>	<u>31.2</u>	1058	31.2
459.GemsFDTD	4	<u>1278</u>	<u>33.2</u>	1276	33.3	1293	32.8	4	1352	31.4	<u>1241</u>	<u>34.2</u>	1231	34.5
465.tonto	4	738	53.3	<u>739</u>	<u>53.3</u>	743	53.0	4	<u>725</u>	<u>54.3</u>	720	54.7	726	54.2
470.lbm	4	1592	34.5	<u>1601</u>	<u>34.3</u>	1607	34.2	4	1592	34.5	<u>1601</u>	<u>34.3</u>	1607	34.2
481.wrf	4	844	52.9	<u>848</u>	<u>52.7</u>	849	52.6	4	844	52.9	<u>848</u>	<u>52.7</u>	849	52.6
482.sphinx3	4	1495	52.2	<u>1500</u>	<u>52.0</u>	1502	51.9	4	1476	52.8	1480	52.7	<u>1479</u>	<u>52.7</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

taskset utility used to bind CPU(s) to processes
All memory slots filled on all used CPU sockets
The tested system can be assembled using any SSI-MEB case and
a Silverstone Zeus 650 watt ST65ZF ATX 12V Power Supply.

Base Compiler Invocation

C benchmarks:
pathcc

C++ benchmarks:
pathCC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 48.1

Tyan Thunder n4250QE (S4985) Opteron 2220

SPECfp_rate_base2006 = 45.6

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2006

Hardware Availability: Feb-2007

Software Availability: Aug-2006

Base Compiler Invocation (Continued)

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast

C++ benchmarks:

-Ofast

Fortran benchmarks:

-Ofast

Benchmarks using both Fortran and C:

-Ofast

Base Other Flags

C benchmarks:

-IPA:max_jobs=2

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 48.1

Tyan Thunder n4250QE (S4985) Opteron 2220

SPECfp_rate_base2006 = 45.6

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2006

Hardware Availability: Feb-2007

Software Availability: Aug-2006

Base Other Flags (Continued)

C++ benchmarks:

-IPA:max_jobs=2

Fortran benchmarks:

-IPA:max_jobs=2

Benchmarks using both Fortran and C:

-IPA:max_jobs=2

Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_TABLE_WORKAROUND
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 48.1

Tyan Thunder n4250QE (S4985) Opteron 2220

SPECfp_rate_base2006 = 45.6

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2006

Hardware Availability: Feb-2007

Software Availability: Aug-2006

Peak Optimization Flags

C benchmarks:

433.milc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

470.lbm: basepeak = yes

482.sphinx3: Same as 433.milc

C++ benchmarks:

444.namd: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

447.dealIII: -Ofast -m32 -fno-exceptions

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -m32 -O3
-OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1
-LNO:minvariant=off -fno-exceptions

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-fast-math

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off
-LNO:ignore_feedback=off

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O2
-OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256

434.zeusmp: -Ofast -CG:local_fwd_sched=on -LNO:blocking=off
-LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: -Ofast -CG:local_fwd_sched=on -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch_ahead=5 -LNO:ou_prod_max=10 -LNO:full_unroll=5
-ipa

454.calculix: -Ofast -CG:prefetch=off -LNO:simd=0 -OPT:unroll_times_max=8
-WOPT:mem_opnds=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 48.1

Tyan Thunder n4250QE (S4985) Opteron 2220

SPECfp_rate_base2006 = 45.6

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Jul-2006

Hardware Availability: Feb-2007

Software Availability: Aug-2006

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-IPA:max_jobs=2

C++ benchmarks:

-IPA:max_jobs=2

Fortran benchmarks:

-IPA:max_jobs=2

Benchmarks using both Fortran and C:

-IPA:max_jobs=2

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:17:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2007.