



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec


SPECint®\_rate2006 = 50.2

Servidor Itautec LX201 (Intel Xeon E5310)

SPECint\_rate\_base2006 = 50.2

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Feb-2007  
Hardware Availability: Feb-2007  
Software Availability: May-2006

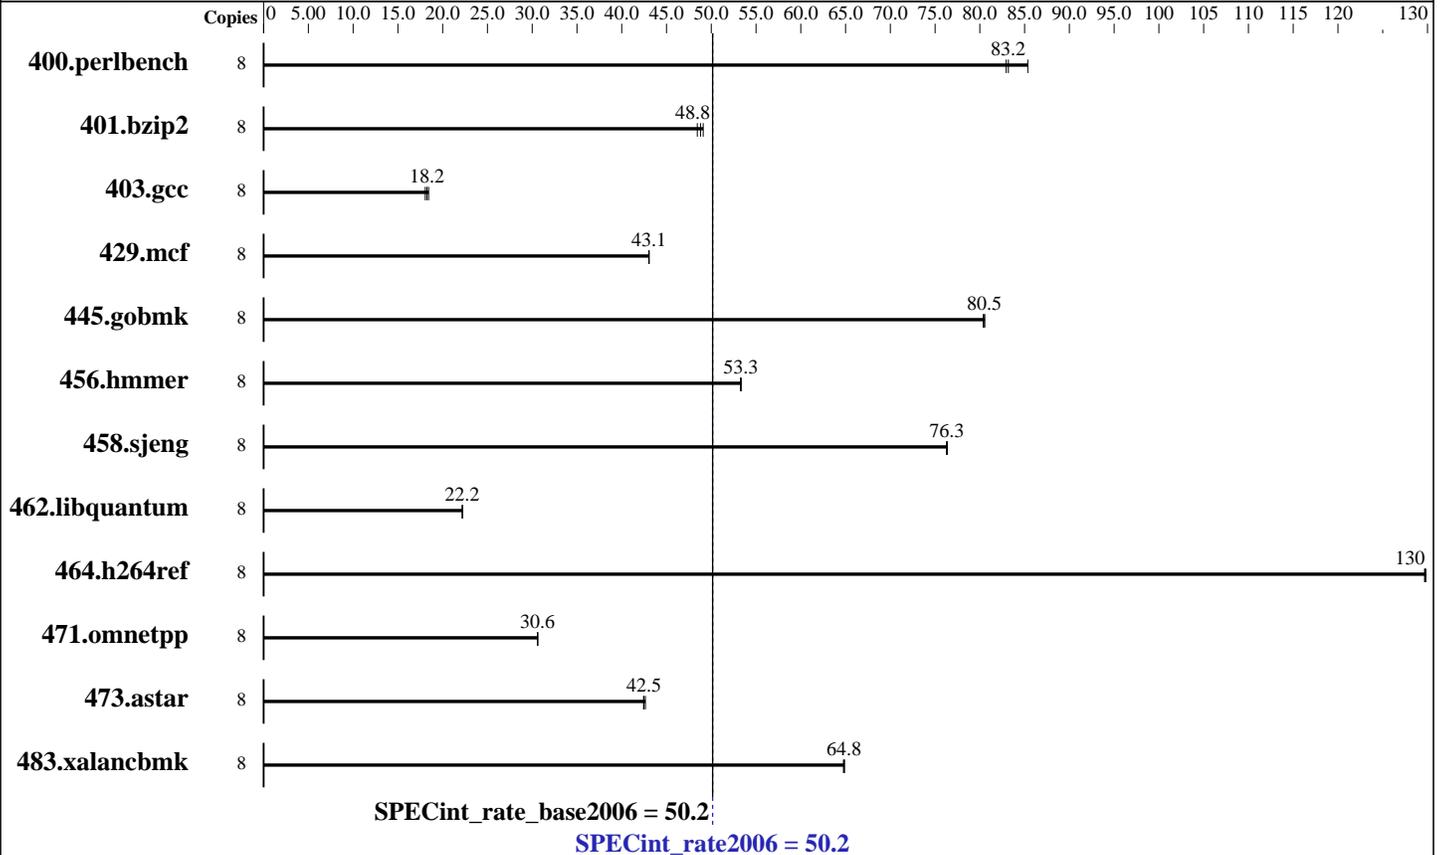

### Hardware

CPU Name: Intel Xeon E5310  
 CPU Characteristics: 1066MHz system bus  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1-2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (8x1GB DDR2-RAM PC2-5300F CAS 5-5-5)  
 Disk Subsystem: 80 GB SATA, 7200RPM  
 Other Hardware: None

### Software

Operating System: Windows Server 2003 Enterprise Edition + SP1 (32-bit)  
 Compiler: Intel C++ Compiler for IA32 version 9.1  
 Package ID W\_CC\_C\_9.1.025 Build no 20060519Z  
 Microsoft Visual Studio .NET 2003 7.1.3088 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: Microquill SmartHeap Library v.8.0 for SMP



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 50.2

Servidor Itaotec LX201 (Intel Xeon E5310)

SPECint\_rate\_base2006 = 50.2

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Feb-2007  
Hardware Availability: Feb-2007  
Software Availability: May-2006

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	916	85.4	942	82.9	<u>940</u>	<u>83.2</u>	8	916	85.4	942	82.9	<u>940</u>	<u>83.2</u>
401.bzip2	8	1594	48.4	<u>1582</u>	<u>48.8</u>	1572	49.1	8	1594	48.4	<u>1582</u>	<u>48.8</u>	1572	49.1
403.gcc	8	<u>3530</u>	<u>18.2</u>	3567	18.1	3495	18.4	8	<u>3530</u>	<u>18.2</u>	3567	18.1	3495	18.4
429.mcf	8	<u>1695</u>	<u>43.1</u>	1695	43.1	1696	43.0	8	<u>1695</u>	<u>43.1</u>	1695	43.1	1696	43.0
445.gobmk	8	1044	80.4	1042	80.5	<u>1042</u>	<u>80.5</u>	8	1044	80.4	1042	80.5	<u>1042</u>	<u>80.5</u>
456.hammer	8	1401	53.3	1399	53.3	<u>1401</u>	<u>53.3</u>	8	1401	53.3	1399	53.3	<u>1401</u>	<u>53.3</u>
458.sjeng	8	1268	76.4	<u>1269</u>	<u>76.3</u>	1269	76.3	8	1268	76.4	<u>1269</u>	<u>76.3</u>	1269	76.3
462.libquantum	8	7468	22.2	7465	22.2	<u>7467</u>	<u>22.2</u>	8	7468	22.2	7465	22.2	<u>7467</u>	<u>22.2</u>
464.h264ref	8	<u>1365</u>	<u>130</u>	1365	130	1364	130	8	<u>1365</u>	<u>130</u>	1365	130	1364	130
471.omnetpp	8	1632	30.6	<u>1635</u>	<u>30.6</u>	1635	30.6	8	1632	30.6	<u>1635</u>	<u>30.6</u>	1635	30.6
473.astar	8	1317	42.6	<u>1322</u>	<u>42.5</u>	1323	42.4	8	1317	42.6	<u>1322</u>	<u>42.5</u>	1323	42.4
483.xalancbmk	8	<u>851</u>	<u>64.8</u>	852	64.8	851	64.9	8	<u>851</u>	<u>64.8</u>	852	64.8	851	64.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99  
C++ benchmarks:  
icl -Qvc7.1

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:  
-fast /F512000000 shlSMPMt.lib -link /FORCE:MULTIPLE  
C++ benchmarks:  
-fast -Qcxx\_features /F512000000 shlSMPMt.lib  
-link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 50.2

Servidor Itautec LX201 (Intel Xeon E5310)

SPECint\_rate\_base2006 = 50.2

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Feb-2007  
Hardware Availability: Feb-2007  
Software Availability: May-2006

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Optimization Flags

C benchmarks:

400.perlbench: basepeak = yes

401.bzip2: basepeak = yes

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 50.2

Servidor Itautec LX201 (Intel Xeon E5310)

SPECint\_rate\_base2006 = 50.2

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Feb-2007

Hardware Availability: Feb-2007

Software Availability: May-2006

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:30:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 March 2007.