SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon X5355)

SPECint®_rate2006 = 60.5

SPECint_rate_base2006 = 60.5

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2007
Hardware Availability: Feb-2007
Software Availability: May-2006

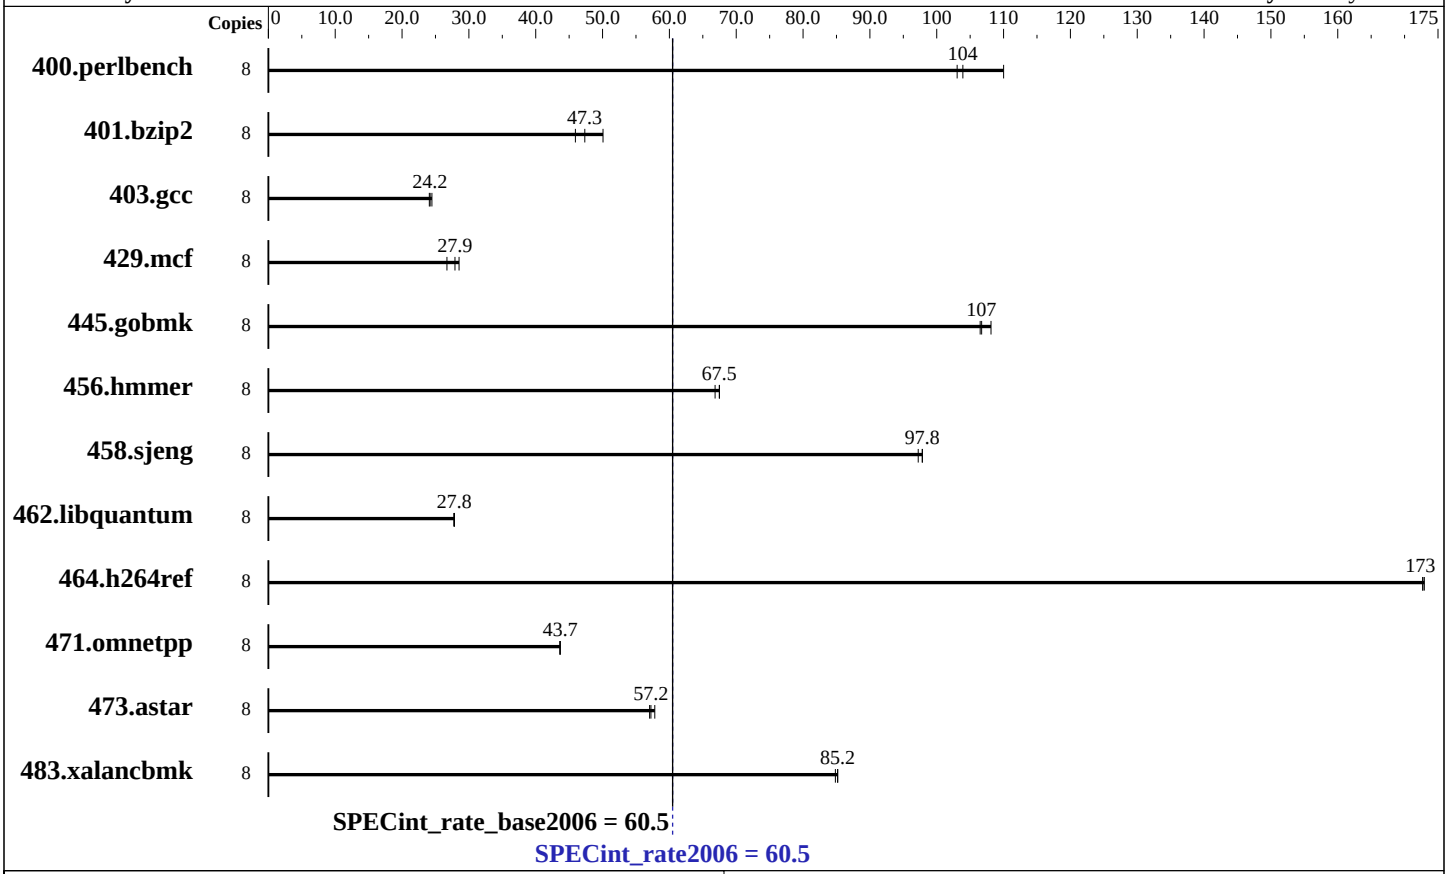

Hardware

CPU Name:	Intel Xeon X5355
CPU Characteristics:	1333MHz system bus
CPU MHz:	2660
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1-2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	6 GB (6x1GB DDR2-RAM PC2-5300F CAS 5-5-5)
Disk Subsystem:	120 GB SATA, 7200RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.025 Build no 20060519Z Microsoft Visual Studio .NET 2003 7.1.3088 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	Microquill SmartHeap Library v.8.0 for SMP

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon X5355)

SPECint_rate2006 = 60.5

SPECint_rate_base2006 = 60.5

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2007
Hardware Availability: Feb-2007
Software Availability: May-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	711	110	**752**	**104**	758	103	8	711	110	**752**	**104**	758	103
401.bzip2	8	1542	50.1	**1631**	**47.3**	1681	45.9	8	1542	50.1	**1631**	**47.3**	1681	45.9
403.gcc	8	**2661**	**24.2**	2632	24.5	2674	24.1	8	**2661**	**24.2**	2632	24.5	2674	24.1
429.mcf	8	**2613**	**27.9**	2731	26.7	2557	28.5	8	**2613**	**27.9**	2731	26.7	2557	28.5
445.gobmk	8	**786**	**107**	788	106	776	108	8	**786**	**107**	788	106	776	108
456.hmmer	8	1117	66.8	1106	67.5	**1106**	**67.5**	8	1117	66.8	1106	67.5	**1106**	**67.5**
458.sjeng	8	**989**	**97.8**	989	97.8	996	97.2	8	**989**	**97.8**	989	97.8	996	97.2
462.libquantum	8	5953	27.8	5975	27.7	**5955**	**27.8**	8	5953	27.8	5975	27.7	**5955**	**27.8**
464.h264ref	8	1024	173	**1025**	**173**	1025	173	8	1024	173	**1025**	**173**	1025	173
471.omnetpp	8	1145	43.7	1146	43.6	**1145**	**43.7**	8	1145	43.7	1146	43.6	**1145**	**43.7**
473.astar	8	985	57.0	971	57.8	**981**	**57.2**	8	985	57.0	971	57.8	**981**	**57.2**
483.xalancbmk	8	648	85.2	651	84.8	**648**	**85.2**	8	648	85.2	651	84.8	**648**	**85.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:
```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:
```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:
```
-fast /F512000000 shlSMPMt.lib            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlSMPMt.lib
            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Optimization Flags

C benchmarks:

400.perlbench: `basepeak = yes`

401.bzip2: `basepeak = yes`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `basepeak = yes`

456.hmmer: `basepeak = yes`

458.sjeng: `basepeak = yes`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon X5355)

SPECint_rate2006 = 60.5

SPECint_rate_base2006 = 60.5

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2007
Hardware Availability: Feb-2007
Software Availability: May-2006

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:31:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2007.