



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B280 (Intel Xeon processor E5335,2.00GHz)

SPECfp®\_rate2006 = 48.7

SPECfp\_rate\_base2006 = 47.8

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Dec-2006

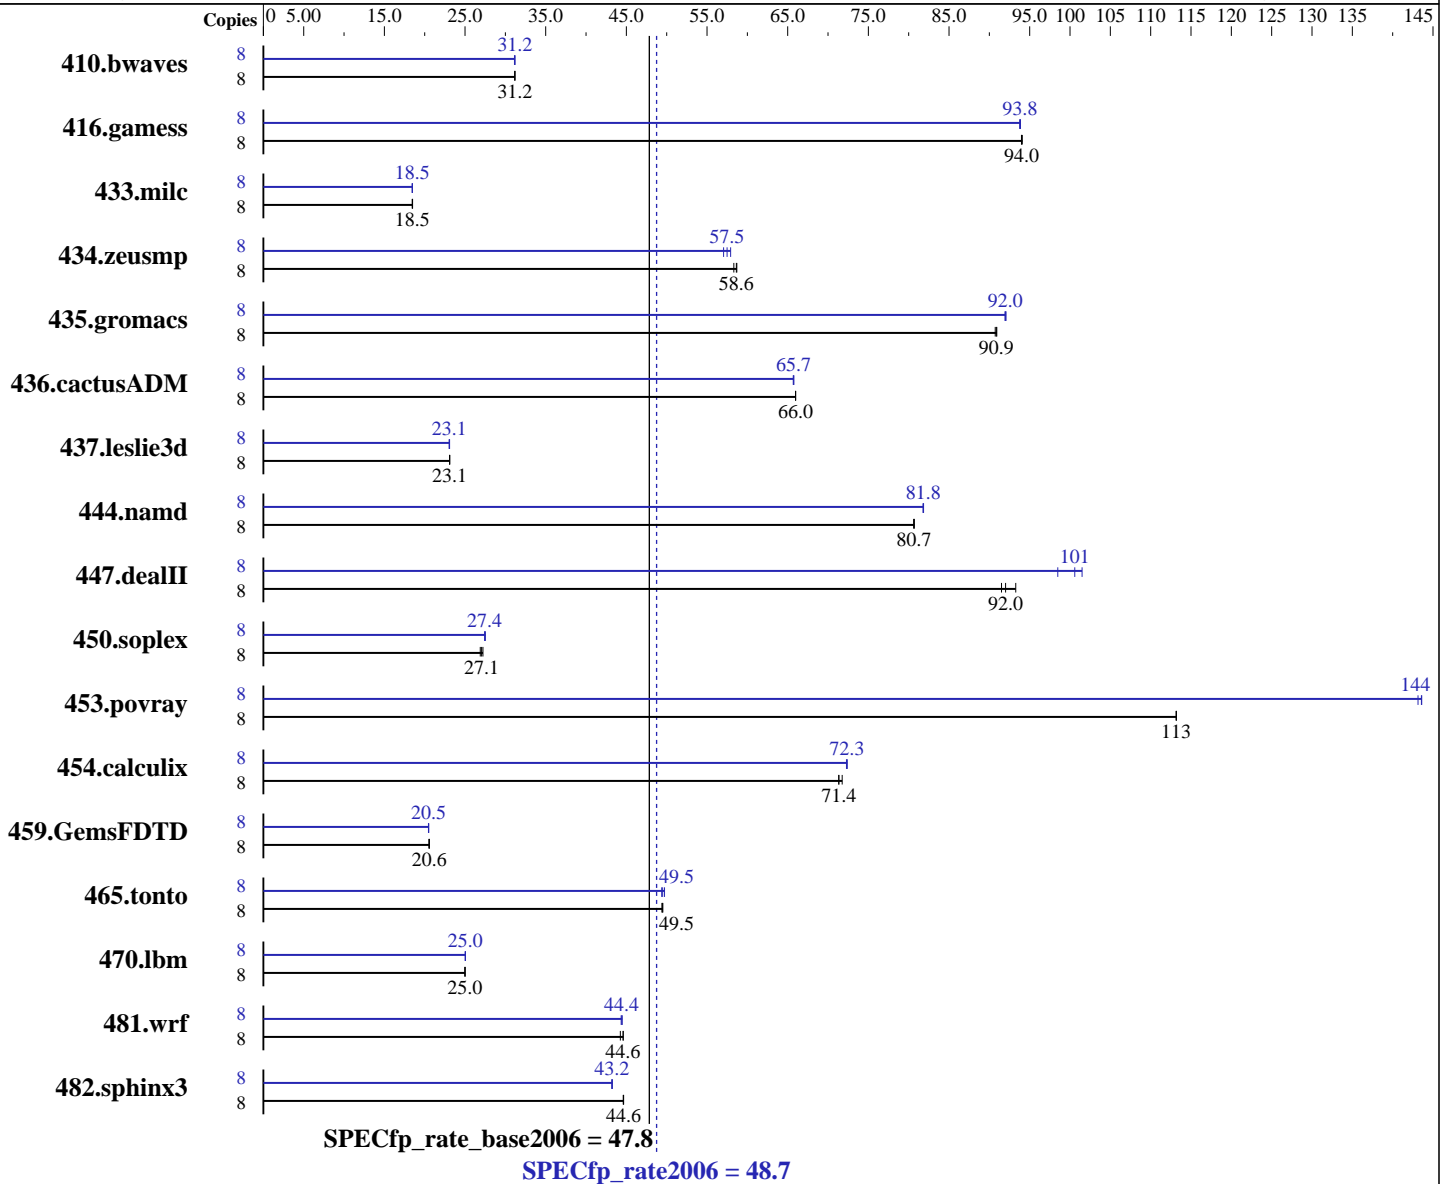

### Hardware

CPU Name: Intel Xeon E5335  
 CPU Characteristics: 2.00 GHz, 8MB L2, 1333MHz bus  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

### Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1  
 Compiler: Intel C++ Compiler for IA32 version 9.1 Package ID W\_CC\_C\_9.1.033 Build no 20061103Z  
 Intel Fortran Compiler for IA32 version 9.1 Package ID W\_FC\_C\_9.1.033 Build no 20061103Z  
 Microsoft Visual Studio .NET 2003 (lib & linker)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B280 (Intel Xeon processor E5335,2.00GHz)

SPECfp\_rate2006 = 48.7

SPECfp\_rate\_base2006 = 47.8

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Feb-2007

Hardware Availability: Jan-2007

Software Availability: Dec-2006

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (1GB DIMMx8, FB-DIMM PC2-5300F ECC CL5)  
Disk Subsystem: 73 GB SAS, 10000RPM  
Other Hardware: None

Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b>3487</b>	<b>31.2</b>	3487	31.2	3488	31.2	8	3493	31.1	3486	31.2	<b>3487</b>	<b>31.2</b>
416.gamess	8	1667	94.0	<b>1666</b>	<b>94.0</b>	1665	94.1	8	1671	93.8	<b>1670</b>	<b>93.8</b>	1669	93.9
433.milc	8	3970	18.5	<b>3974</b>	<b>18.5</b>	3980	18.5	8	<b>3976</b>	<b>18.5</b>	3982	18.4	3974	18.5
434.zeusmp	8	1248	58.3	<b>1242</b>	<b>58.6</b>	1240	58.7	8	1257	57.9	1276	57.1	<b>1266</b>	<b>57.5</b>
435.gromacs	8	630	90.7	<b>629</b>	<b>90.9</b>	628	90.9	8	621	91.9	<b>621</b>	<b>92.0</b>	620	92.1
436.cactusADM	8	1449	66.0	<b>1449</b>	<b>66.0</b>	1449	66.0	8	<b>1454</b>	<b>65.7</b>	1455	65.7	1454	65.8
437.leslie3d	8	3258	23.1	3256	23.1	<b>3256</b>	<b>23.1</b>	8	3257	23.1	3266	23.0	<b>3260</b>	<b>23.1</b>
444.namd	8	795	80.7	796	80.6	<b>795</b>	<b>80.7</b>	8	785	81.8	<b>784</b>	<b>81.8</b>	784	81.8
447.dealII	8	<b>995</b>	<b>92.0</b>	1000	91.5	981	93.3	8	<b>910</b>	<b>101</b>	929	98.5	902	101
450.soplex	8	<b>2466</b>	<b>27.1</b>	2481	26.9	2451	27.2	8	2425	27.5	2431	27.4	<b>2431</b>	<b>27.4</b>
453.povray	8	376	113	376	113	<b>376</b>	<b>113</b>	8	297	143	296	144	<b>296</b>	<b>144</b>
454.calculix	8	920	71.8	<b>925</b>	<b>71.4</b>	925	71.3	8	913	72.3	<b>912</b>	<b>72.3</b>	912	72.4
459.GemsFDTD	8	4136	20.5	4125	20.6	<b>4126</b>	<b>20.6</b>	8	4140	20.5	4148	20.5	<b>4145</b>	<b>20.5</b>
465.tonto	8	1590	49.5	<b>1592</b>	<b>49.5</b>	1593	49.4	8	<b>1590</b>	<b>49.5</b>	1594	49.4	1583	49.7
470.lbm	8	4397	25.0	<b>4398</b>	<b>25.0</b>	4398	25.0	8	<b>4390</b>	<b>25.0</b>	4392	25.0	4389	25.0
481.wrf	8	2019	44.3	2003	44.6	<b>2004</b>	<b>44.6</b>	8	2009	44.5	<b>2011</b>	<b>44.4</b>	2015	44.4
482.sphinx3	8	3491	44.7	3495	44.6	<b>3492</b>	<b>44.6</b>	8	3610	43.2	3605	43.3	<b>3606</b>	<b>43.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc7.1 -Qc99 ifort



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B280 (Intel Xeon processor E5335,2.00GHz)

SPECfp\_rate2006 = 48.7

SPECfp\_rate\_base2006 = 47.8

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Feb-2007  
Hardware Availability: Jan-2007  
Software Availability: Dec-2006

## Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-DBOOST\_NO\_INTRINSIC\_WCHAR\_T  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:  
-fast /F950000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:  
-fast -Qcxx\_features /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:  
-fast /F950000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:  
-fast /F950000000 -link /FORCE:MULTIPLE

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99

C++ benchmarks:  
icl -Qvc7.1

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc7.1 -Qc99 ifort

## Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-DBOOST\_NO\_INTRINSIC\_WCHAR\_T

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B280 (Intel Xeon processor E5335,2.00GHz)

SPECfp\_rate2006 = 48.7

SPECfp\_rate\_base2006 = 47.8

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Feb-2007  
Hardware Availability: Jan-2007  
Software Availability: Dec-2006

## Peak Portability Flags (Continued)

453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

### C benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE

### C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE

### Fortran benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000  
-link /FORCE:MULTIPLE

### Benchmarks using both Fortran and C:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000  
-link /FORCE:MULTIPLE

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:34:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 March 2007.