



SPEC® CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®2006 = 13.5

CELSIUS R540, Intel Xeon processor E5335

SPECint_base2006 = 12.9

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Nov-2006

Software Availability: Jan-2007

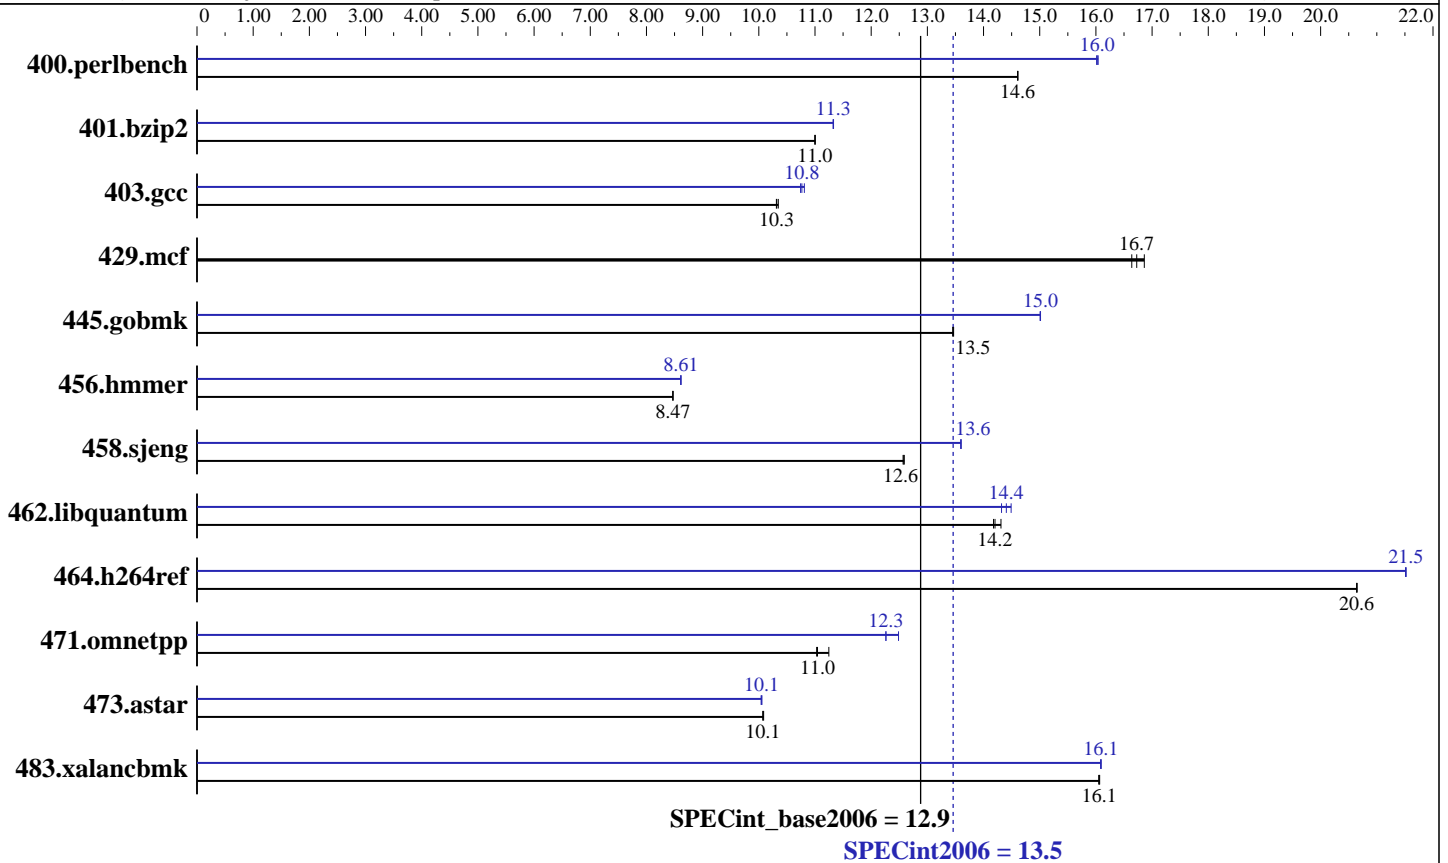

Hardware

CPU Name: Intel Xeon E5335
 CPU Characteristics: E5335
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4x2 GB DDR2 5300F, 2 rank, CL5-5-5,with ECC)
 Disk Subsystem: SATA II 7200 rpm
 Other Hardware: None

Software

Operating System: Windows XP, 64 bit Edition
 Compiler: Intel C++ Compiler for 32-bit applications
 - Version 9.1, Build 20070109Z
 Microsoft Visual Studio .NET 2003 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.0



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 13.5

CELSIUS R540, Intel Xeon processor E5335

SPECint_base2006 = 12.9

CPU2006 license: 22

Test date: Feb-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Jan-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>669</u>	<u>14.6</u>	669	14.6	669	14.6	610	16.0	<u>610</u>	<u>16.0</u>	609	16.0
401.bzip2	<u>877</u>	<u>11.0</u>	878	11.0	877	11.0	<u>852</u>	<u>11.3</u>	852	11.3	852	11.3
403.gcc	<u>780</u>	<u>10.3</u>	781	10.3	778	10.3	745	10.8	<u>748</u>	<u>10.8</u>	749	10.7
429.mcf	<u>545</u>	<u>16.7</u>	541	16.9	548	16.6	<u>545</u>	<u>16.7</u>	541	16.9	548	16.6
445.gobmk	780	13.5	779	13.5	<u>780</u>	<u>13.5</u>	699	15.0	699	15.0	<u>699</u>	<u>15.0</u>
456.hmmer	1101	8.47	1101	8.47	<u>1101</u>	<u>8.47</u>	1083	8.61	1083	8.61	<u>1083</u>	<u>8.61</u>
458.sjeng	<u>962</u>	<u>12.6</u>	961	12.6	963	12.6	<u>890</u>	<u>13.6</u>	890	13.6	890	13.6
462.libquantum	1461	14.2	1448	14.3	<u>1459</u>	<u>14.2</u>	<u>1438</u>	<u>14.4</u>	1430	14.5	1447	14.3
464.h264ref	<u>1072</u>	<u>20.6</u>	1072	20.6	1072	20.6	1028	21.5	<u>1028</u>	<u>21.5</u>	1029	21.5
471.omnetpp	567	11.0	556	11.2	<u>566</u>	<u>11.0</u>	501	12.5	<u>510</u>	<u>12.3</u>	510	12.3
473.astar	696	10.1	<u>697</u>	<u>10.1</u>	697	10.1	<u>698</u>	<u>10.1</u>	699	10.0	698	10.1
483.xalancbmk	429	16.1	430	16.1	<u>430</u>	<u>16.1</u>	429	16.1	<u>429</u>	<u>16.1</u>	429	16.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

BIOS default settings have been used, except:
Snoop Filter Enabled
Adjacent Cache Line Prefetch Enabled

General Notes

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 13.5

CELSIUS R540, Intel Xeon processor E5335

SPECint_base2006 = 12.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Nov-2006

Software Availability: Jan-2007

Base Optimization Flags

C benchmarks:

-fast -F512000000 shlw32M.lib -link -FORCE:MULTIPLE

C++ benchmarks:

-fast -Qcxx-features -F512000000 shlw32M.lib -link -FORCE:MULTIPLE

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F512000000
shlw32M.lib -link -FORCE:MULTIPLE

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: basepeak = yes

445.gobmk: Same as 400.perlbench

456.hmmer: Same as 400.perlbench

458.sjeng: Same as 400.perlbench

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features
-F512000000 shlw32M.lib -link -FORCE:MULTIPLE

Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.18.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.18.xml



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 13.5

CELSIUS R540, Intel Xeon processor E5335

SPECint_base2006 = 12.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2007

Hardware Availability: Nov-2006

Software Availability: Jan-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Wed Jul 15 13:14:40 2009 by SPEC CPU2006 PS/PDF formatter v6323.