SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 (Intel Xeon 7130N)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 57.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2007
Hardware Availability: Oct-2006
Software Availability: Aug-2006

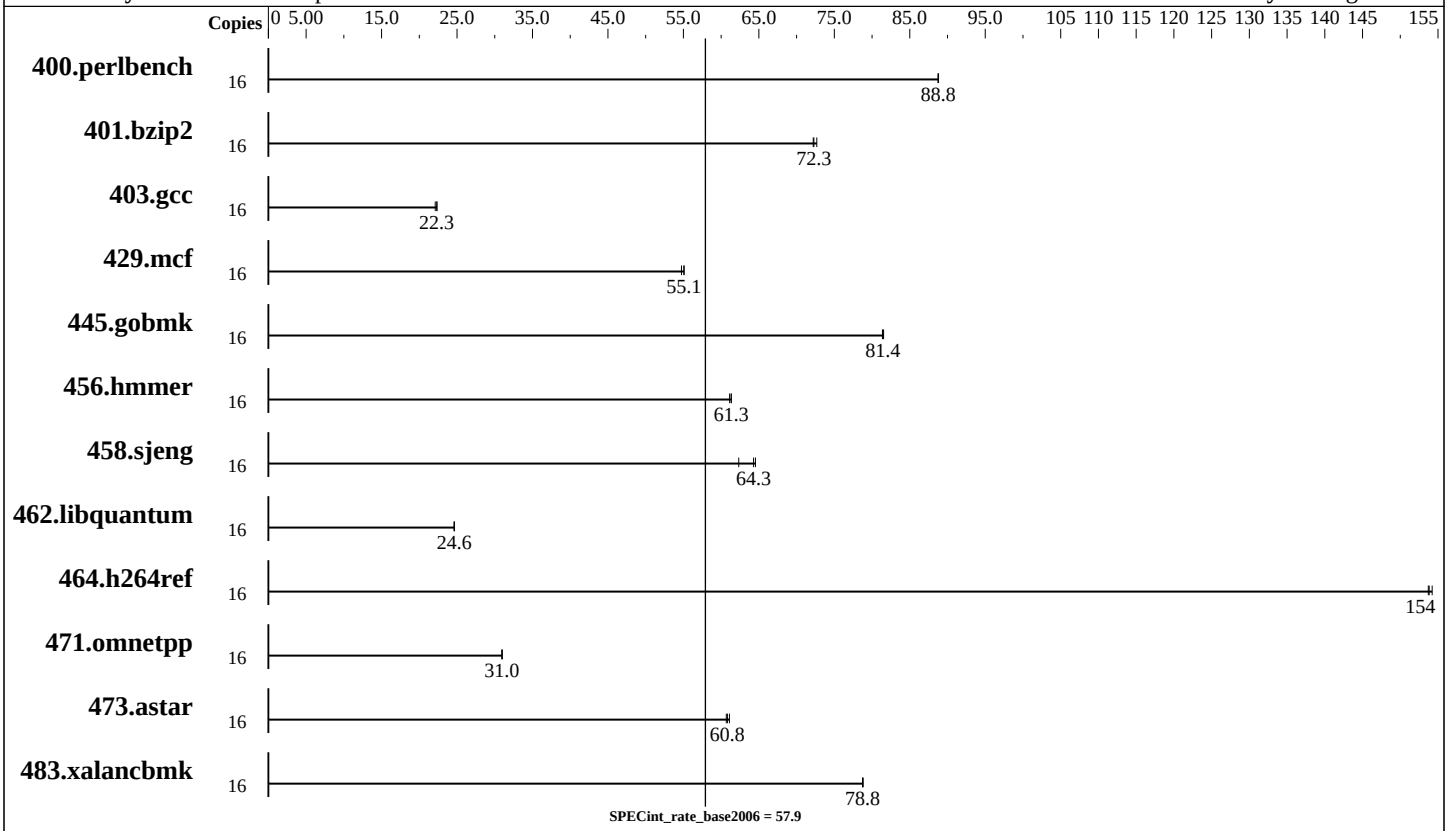

Hardware

CPU Name:	Intel Xeon 7130N
CPU Characteristics:	667 MHz bus
CPU MHz:	3166
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,4 chips
Primary Cache:	12 K micro-ops I + 16 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (16 x 2048 MB ECC PC2-3200)
Disk Subsystem:	73 GB SAS, 10k RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows Server 2003 Enterprise x64 Edition + SP1 (64-bit)
Compiler:	Intel C++ Compiler for IA32 version 9.1 Build no 20060816 Microsoft Visual Studio .Net 2003 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	Smart Heap Library, Version 8

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 (Intel Xeon 7130N)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 57.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2007
Hardware Availability: Oct-2006
Software Availability: Aug-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	1760	88.8	**1761**	**88.8**	1761	88.7							
401.bzip2	16	2124	72.7	2138	72.2	**2136**	**72.3**							
403.gcc	16	5825	22.1	5765	22.3	**5770**	**22.3**							
429.mcf	16	**2650**	**55.1**	2648	55.1	2665	54.7							
445.gobmk	16	2059	81.5	**2061**	**81.4**	2063	81.4							
456.hmmer	16	**2434**	**61.3**	2443	61.1	2433	61.3							
458.sjeng	16	3106	62.3	2999	64.5	**3011**	**64.3**							
462.libquantum	16	**13459**	**24.6**	13454	24.6	13461	24.6							
464.h264ref	16	**2302**	**154**	2296	154	2303	154							
471.omnetpp	16	3227	31.0	3231	31.0	**3230**	**31.0**							
473.astar	16	1851	60.7	1838	61.1	**1846**	**60.8**							
483.xalancbmk	16	1401	78.8	**1402**	**78.8**	1402	78.7							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Bios Settings
  Hardware Prefetch enabled
  Memory Array set to High-Performance Memory Array
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:

```
-fast /F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic91-flags.20090715.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic91-flags.20090715.01.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:43:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 March 2007.