



SPEC[®] CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp[®]_rate2006 = 54.1

CELSIUS R640, Intel Xeon E5345 processor

SPECfp_rate_base2006 = 52.8

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2007

Hardware Availability: Nov-2006

Software Availability: Nov-2006

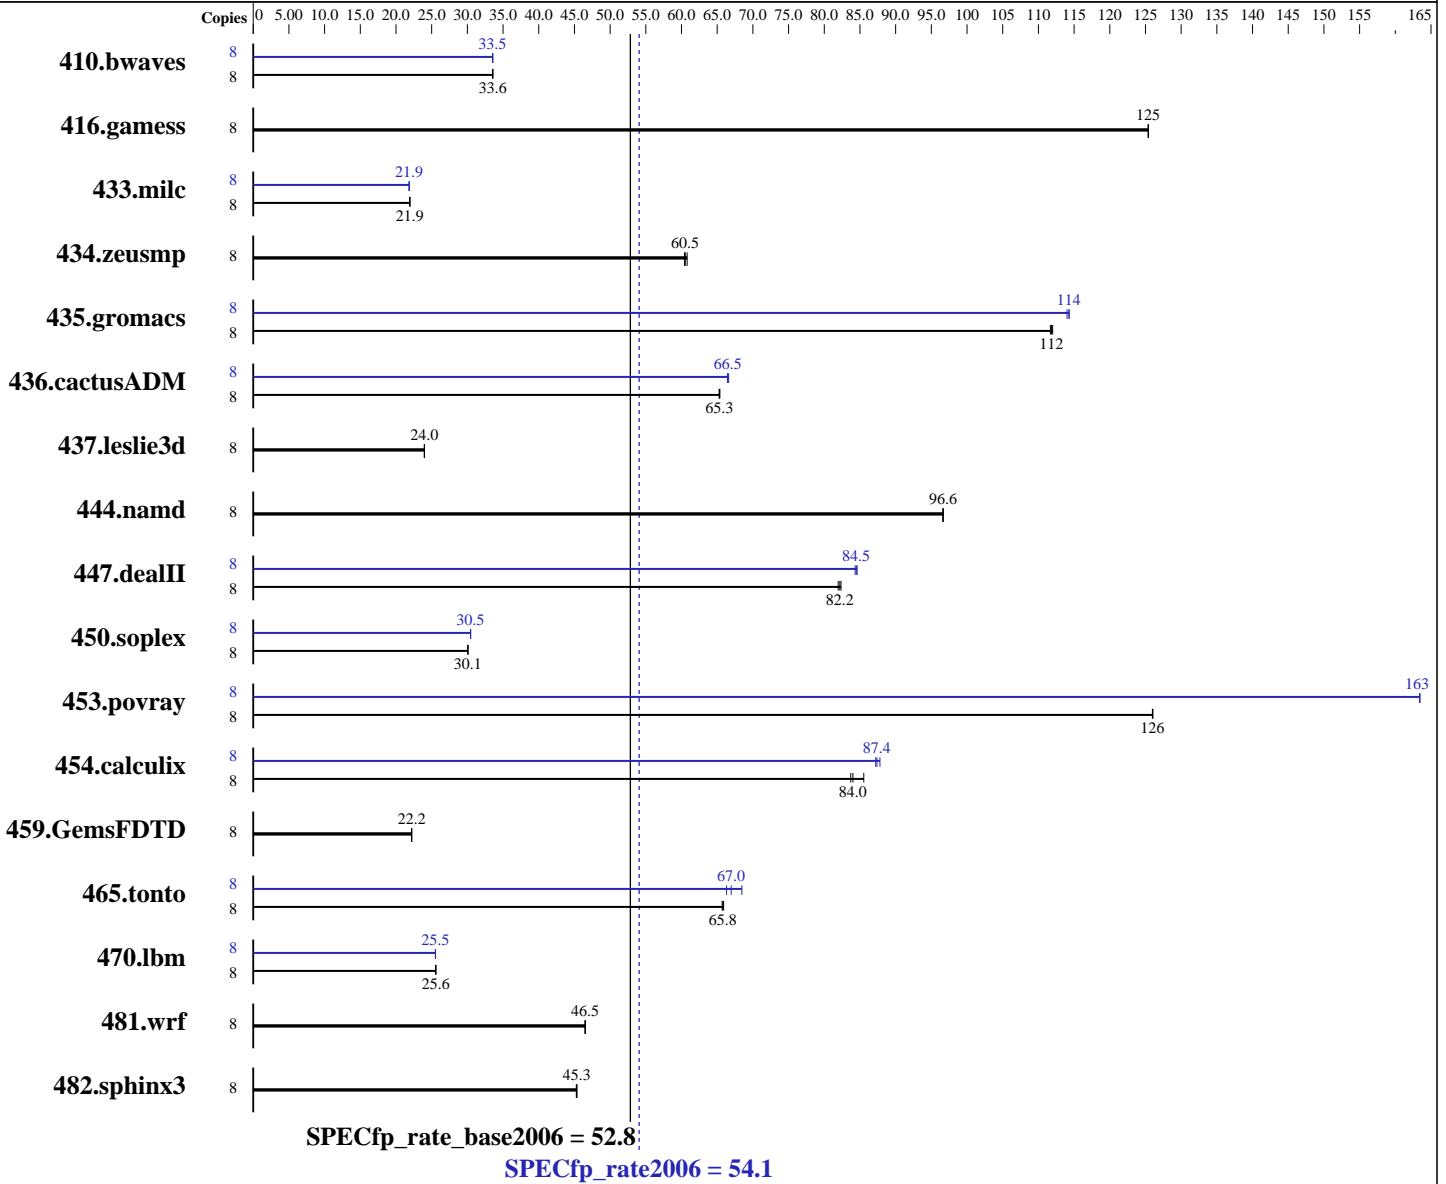

Hardware

CPU Name: Intel Xeon E5345
 CPU Characteristics: E5345
 CPU MHz: 2333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: Windows XP, 64 bit Edition
 Compiler: Intel C++ Compiler for EM64T version 9.1
 - Build 20061104, Package-ID W_CC_C_9.1.033
 Intel Fortran Compiler for EM64T version 9.1
 - Build 20061104, Package-ID W_FC_C_9.1.033
 Microsoft Visual Studio 2005 (libr. & linker)

Auto Parallel: No
 File System: NTFS
 System State: Default

Continued on next page



SPEC CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 54.1

CELSIUS R640, Intel Xeon E5345 processor

SPECfp_rate_base2006 = 52.8

CPU2006 license: 22

Test date: Mar-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2006

Hardware (Continued)

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: SATA II 7200 rpm
 Other Hardware: None

Software (Continued)

Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	3241	33.5	<u>3240</u>	<u>33.6</u>	3239	33.6	8	3243	33.5	<u>3241</u>	<u>33.5</u>	3238	33.6		
416.gamess	8	1249	125	<u>1249</u>	<u>125</u>	1249	125	8	1249	125	<u>1249</u>	<u>125</u>	1249	125		
433.milc	8	3349	21.9	3346	21.9	<u>3348</u>	<u>21.9</u>	8	3362	21.8	<u>3361</u>	<u>21.9</u>	3360	21.9		
434.zeusmp	8	1205	60.4	<u>1203</u>	<u>60.5</u>	1198	60.8	8	1205	60.4	<u>1203</u>	<u>60.5</u>	1198	60.8		
435.gromacs	8	510	112	511	112	<u>511</u>	<u>112</u>	8	500	114	<u>500</u>	<u>114</u>	501	114		
436.cactusADM	8	<u>1464</u>	<u>65.3</u>	1464	65.3	1462	65.4	8	1439	66.4	<u>1438</u>	<u>66.5</u>	1435	66.6		
437.leslie3d	8	<u>3136</u>	<u>24.0</u>	3136	24.0	3136	24.0	8	<u>3136</u>	<u>24.0</u>	3136	24.0	3136	24.0		
444.namd	8	<u>664</u>	<u>96.6</u>	664	96.7	664	96.6	8	<u>664</u>	<u>96.6</u>	664	96.7	664	96.6		
447.dealII	8	1117	81.9	<u>1114</u>	<u>82.2</u>	1111	82.3	8	1082	84.6	1085	84.3	<u>1083</u>	<u>84.5</u>		
450.soplex	8	2218	30.1	<u>2219</u>	<u>30.1</u>	2219	30.1	8	<u>2191</u>	<u>30.5</u>	2191	30.5	2191	30.4		
453.povray	8	<u>338</u>	<u>126</u>	338	126	338	126	8	<u>260</u>	<u>163</u>	260	163	260	163		
454.calculix	8	788	83.7	<u>786</u>	<u>84.0</u>	772	85.5	8	<u>755</u>	<u>87.4</u>	752	87.8	757	87.2		
459.GemsFDTD	8	3823	22.2	3826	22.2	<u>3823</u>	<u>22.2</u>	8	3823	22.2	3826	22.2	<u>3823</u>	<u>22.2</u>		
465.tonto	8	1195	65.9	<u>1196</u>	<u>65.8</u>	1198	65.7	8	1187	66.3	<u>1176</u>	<u>67.0</u>	1150	68.5		
470.lbm	8	<u>4298</u>	<u>25.6</u>	4298	25.6	4298	25.6	8	4305	25.5	<u>4305</u>	<u>25.5</u>	4306	25.5		
481.wrf	8	<u>1921</u>	<u>46.5</u>	1922	46.5	1921	46.5	8	<u>1921</u>	<u>46.5</u>	1922	46.5	1921	46.5		
482.sphinx3	8	3439	45.3	3445	45.3	<u>3440</u>	<u>45.3</u>	8	3439	45.3	3445	45.3	<u>3440</u>	<u>45.3</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

BIOS default settings have been used, except:
 High Bandwidth Option Enabled
 (To Optimize throughput of High Bandwidth FSB applications
 on multiprocessor configurations)

General Notes

'start /b /wait /affinity' command is used to bind CPU(s) to processors.
 The Windows command "start /b /wait /affinity <hex_affinity_mask> application"
 starts the specified application without creating a new window (/b)
 and waits for its termination (/wait). Only the processors specified
 in <hex_affinity_mask> are allowed to execute the application.

Continued on next page



SPEC CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 54.1

CELSIUS R640, Intel Xeon E5345 processor

SPECfp_rate_base2006 = 52.8

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2007

Hardware Availability: Nov-2006

Software Availability: Nov-2006

General Notes (Continued)

See the Windows documentation for the description of other parameters of the start command.

For information about Fujitsu Siemens Computers in your country please see: <http://www.fujitsu-siemens.com/countries>

Compiler Invocation

C benchmarks:
icl -Qvc8 -Qc99

C++ benchmarks:
icl -Qvc8

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc8 -Qc99 ifort

Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -D_Complex= -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -D_Complex= -DSPEC_CPU_P64
 436.cactusADM: -D_Complex= -DSPEC_CPU_P64 -Qlowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -D_Complex= -DSPEC_CPU_P64 -DBOOST_NO_INTRINSIC_WCHAR_T
 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -D_Complex= -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER
 -Qlowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -D_Complex= -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -D_Complex= -DSPEC_CPU_P64



SPEC CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 54.1

CELSIUS R640, Intel Xeon E5345 processor

SPECfp_rate_base2006 = 52.8

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2007

Hardware Availability: Nov-2006

Software Availability: Nov-2006

Base Optimization Flags

C benchmarks:

-fast -F950000000

C++ benchmarks:

-fast -Qcxx-features -F950000000

Fortran benchmarks:

-fast -F950000000

Benchmarks using both Fortran and C:

-fast -F950000000

Peak Optimization Flags

C benchmarks:

433.milc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F950000000

470.lbm: Same as 433.milc

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features
-F950000000

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F950000000

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: Same as 410.bwaves

Continued on next page



SPEC CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 54.1

CELSIUS R640, Intel Xeon E5345 processor

SPECfp_rate_base2006 = 52.8

CPU2006 license: 22

Test date: Mar-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2006

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F950000000

436.cactusADM: Same as 435.gromacs

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20070307.00.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20070307.00.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Sun Dec 16 00:22:26 2007 by SPEC CPU2006 PS/PDF formatter v5614.