SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor E5310,1.60GHz)

SPECint®_rate2006 = 50.7

SPECint_rate_base2006 = 48.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

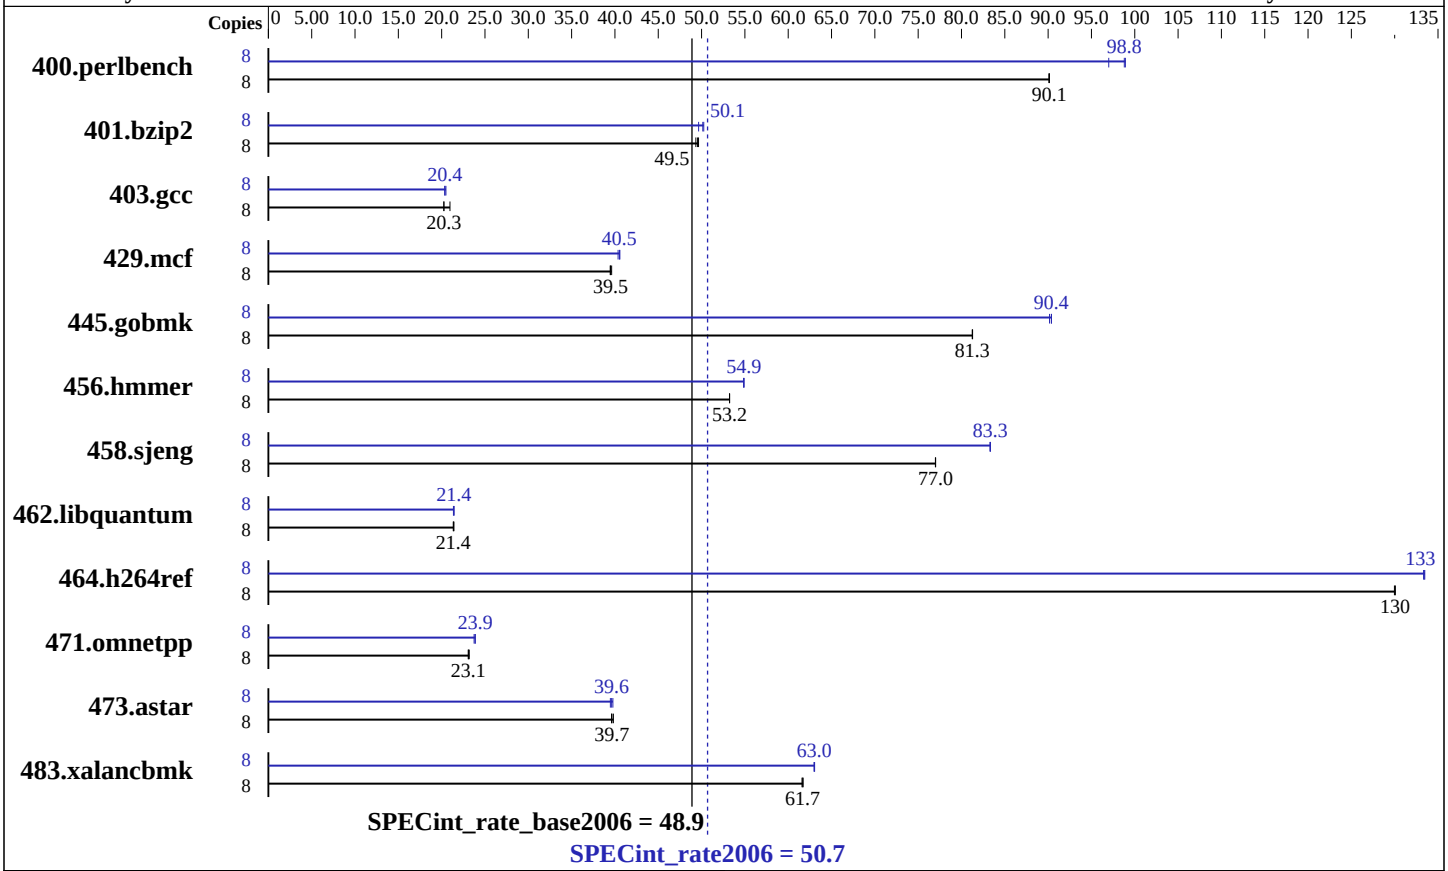

Hardware

CPU Name:	Intel Xeon E5310
CPU Characteristics:	1.60 GHz, 8MB L2, 1066MHz bus
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	12 GB (1GB DIMMx12, FB-DIMM PC2-5300F ECC CL5)
Disk Subsystem:	73 GB SAS, 10000RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise X64 Edition Service Pack1
Compiler:	Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.033 Build no 20061103Z Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.0 (shlW32M.lib)

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor E5310,1.60GHz)

SPECint_rate2006 = 50.7

SPECint_rate_base2006 = 48.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	867	90.1	**867**	**90.1**	867	90.1	8	806	97.0	790	98.9	**791**	**98.8**
401.bzip2	8	1565	49.3	1555	49.6	**1558**	**49.5**	8	1555	49.7	1536	50.3	**1540**	**50.1**
403.gcc	8	3073	21.0	3180	20.3	**3178**	**20.3**	8	**3160**	**20.4**	3164	20.4	3143	20.5
429.mcf	8	**1848**	**39.5**	1841	39.6	1849	39.5	8	1798	40.6	**1800**	**40.5**	1808	40.4
445.gobmk	8	1032	81.3	**1033**	**81.3**	1033	81.2	8	931	90.2	**929**	**90.4**	929	90.4
456.hmmer	8	1402	53.2	**1402**	**53.2**	1402	53.2	8	1361	54.9	**1360**	**54.9**	1360	54.9
458.sjeng	8	1257	77.0	1257	77.0	**1257**	**77.0**	8	**1162**	**83.3**	1162	83.3	1161	83.3
462.libquantum	8	7739	21.4	**7763**	**21.4**	7764	21.4	8	**7739**	**21.4**	7760	21.4	7738	21.4
464.h264ref	8	1362	130	1361	130	**1361**	**130**	8	**1327**	**133**	1328	133	1326	133
471.omnetpp	8	2167	23.1	**2166**	**23.1**	2156	23.2	8	2106	23.7	**2095**	**23.9**	2094	23.9
473.astar	8	**1416**	**39.7**	1418	39.6	1410	39.8	8	1423	39.5	**1418**	**39.6**	1412	39.8
483.xalancbmk	8	894	61.7	896	61.6	**895**	**61.7**	8	876	63.0	**876**	**63.0**	876	63.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R460 model.
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:
```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:
```
-fast /F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib
            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:
```
icl -Qvc7.1
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Peak Optimization Flags

C benchmarks:
```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000 shlw32m.lib
            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/flags.20090714.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/flags.20090714.00.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:12:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2007.