SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5335,2.00GHz)

SPECfp®2006 = 12.1

SPECfp_base2006 = 11.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

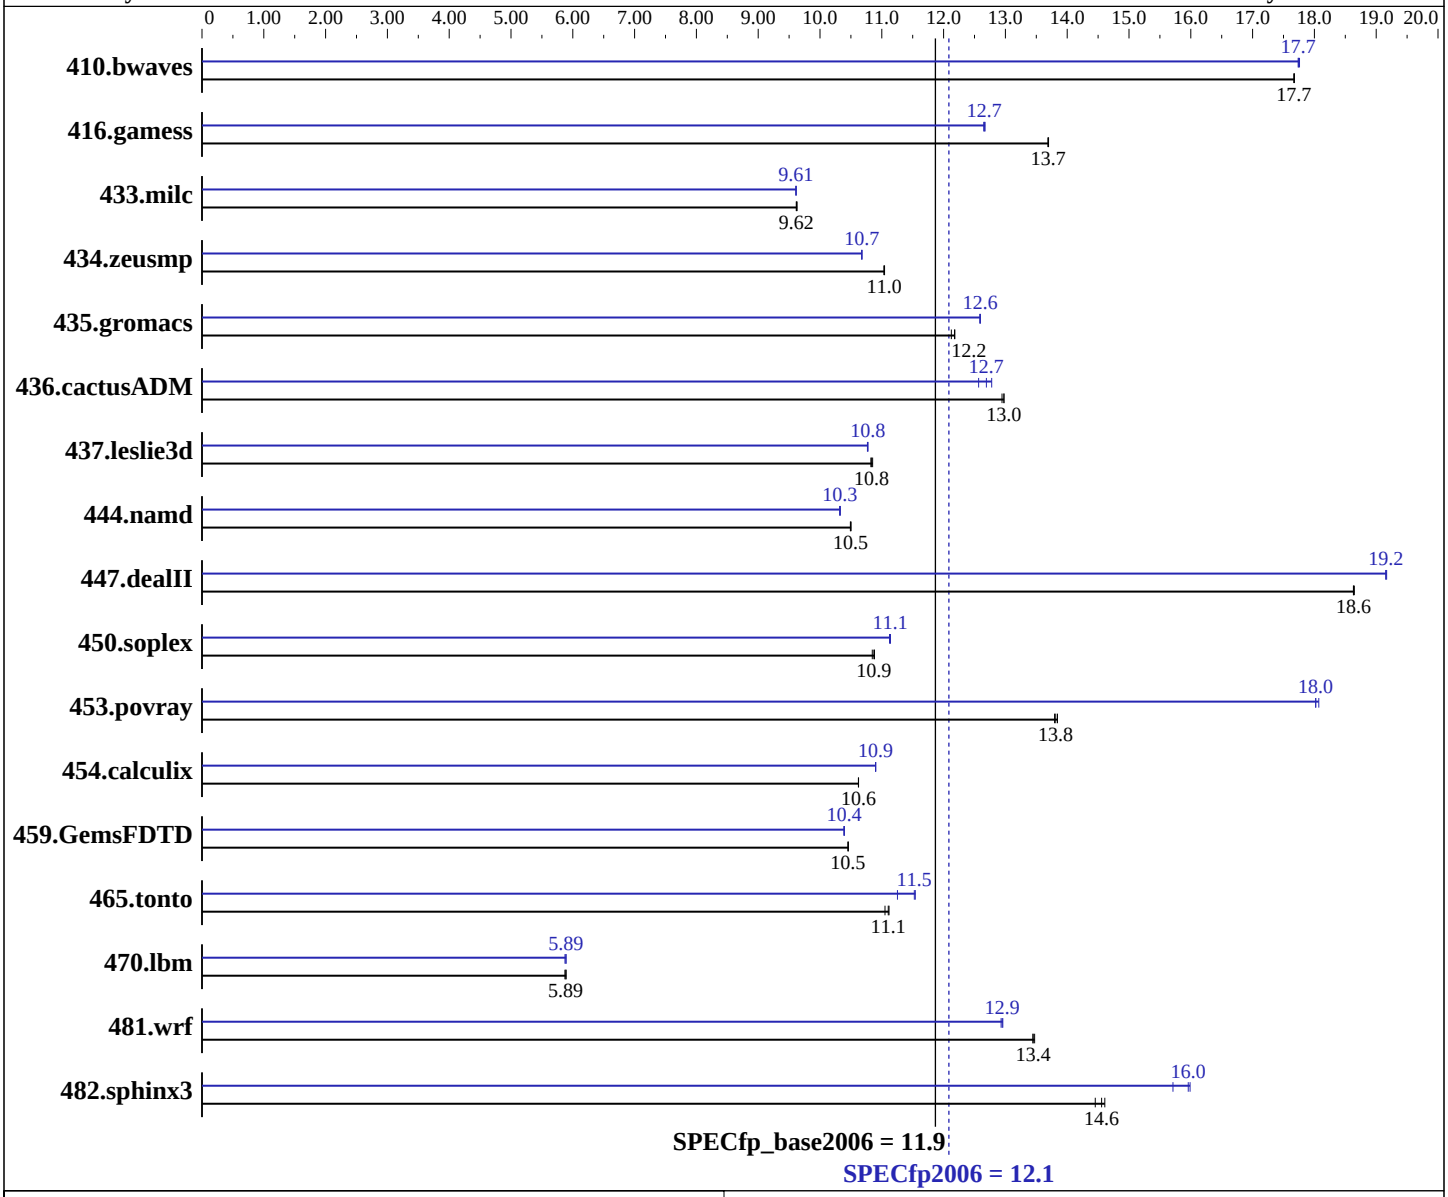

Hardware

CPU Name:	Intel Xeon E5335
CPU Characteristics:	2.0GHz, 2x4 MB L2 shared, 1333 MHz system bus
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (EM64T) kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for Intel EM64T-based applications, Version 9.1 Package ID l_cc_c_9.1.045 Build no 20061101 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1 Package ID l_fc_c_9.1.040 Build no 20061101
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5335,2.00GHz)

SPECfp2006 = 12.1

SPECfp_base2006 = 11.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

L3 Cache:	None	File System:	ext2
Other Cache:	None	System State:	Multi-user, run level 3
Memory:	24 GB (2GB DIMMx12, FB-DIMM PC2-5300F ECC CL5)	Base Pointers:	64-bit
Disk Subsystem:	73 GB SAS, 10000RPM	Peak Pointers:	32/64-bit
Other Hardware:	None	Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	769	17.7	**769**	**17.7**	769	17.7	**766**	**17.7**	766	17.7	765	17.8
416.gamess	1430	13.7	**1430**	**13.7**	1429	13.7	1545	12.7	1548	12.6	**1547**	**12.7**
433.milc	953	9.63	**954**	**9.62**	955	9.62	**955**	**9.61**	955	9.61	955	9.61
434.zeusmp	**824**	**11.0**	825	11.0	824	11.0	852	10.7	**852**	**10.7**	852	10.7
435.gromacs	589	12.1	**586**	**12.2**	586	12.2	**567**	**12.6**	567	12.6	567	12.6
436.cactusADM	**921**	**13.0**	923	12.9	921	13.0	**942**	**12.7**	935	12.8	951	12.6
437.leslie3d	**868**	**10.8**	869	10.8	866	10.9	872	10.8	**872**	**10.8**	873	10.8
444.namd	764	10.5	764	10.5	**764**	**10.5**	776	10.3	**777**	**10.3**	777	10.3
447.dealII	**614**	**18.6**	614	18.6	614	18.6	**597**	**19.2**	597	19.2	597	19.2
450.soplex	769	10.8	**767**	**10.9**	766	10.9	750	11.1	749	11.1	**749**	**11.1**
453.povray	386	13.8	**385**	**13.8**	384	13.8	**295**	**18.0**	294	18.1	295	18.0
454.calculix	777	10.6	777	10.6	**777**	**10.6**	757	10.9	757	10.9	**757**	**10.9**
459.GemsFDTD	1015	10.5	**1015**	**10.5**	1015	10.5	1021	10.4	**1021**	**10.4**	1021	10.4
465.tonto	890	11.1	885	11.1	**886**	**11.1**	874	11.3	853	11.5	**854**	**11.5**
470.lbm	2332	5.89	2340	5.87	**2334**	**5.89**	2339	5.87	2332	5.89	**2334**	**5.89**
481.wrf	**830**	**13.4**	831	13.4	829	13.5	864	12.9	**863**	**12.9**	862	13.0
482.sphinx3	1334	14.6	**1339**	**14.6**	1348	14.5	1240	15.7	1219	16.0	**1221**	**16.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Environment stack size set to 'unlimited'

System was booted uniprocessor by setting "maxcpus=0"
kernel parameter in menu.lst
```

General Notes

```
The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R440 model.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

C++ benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

Fortran benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast

Benchmarks using both Fortran and C:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:11:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2007.