SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5320,1.86GHz)

SPECint®_rate2006 = 54.7

SPECint_rate_base2006 = 53.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

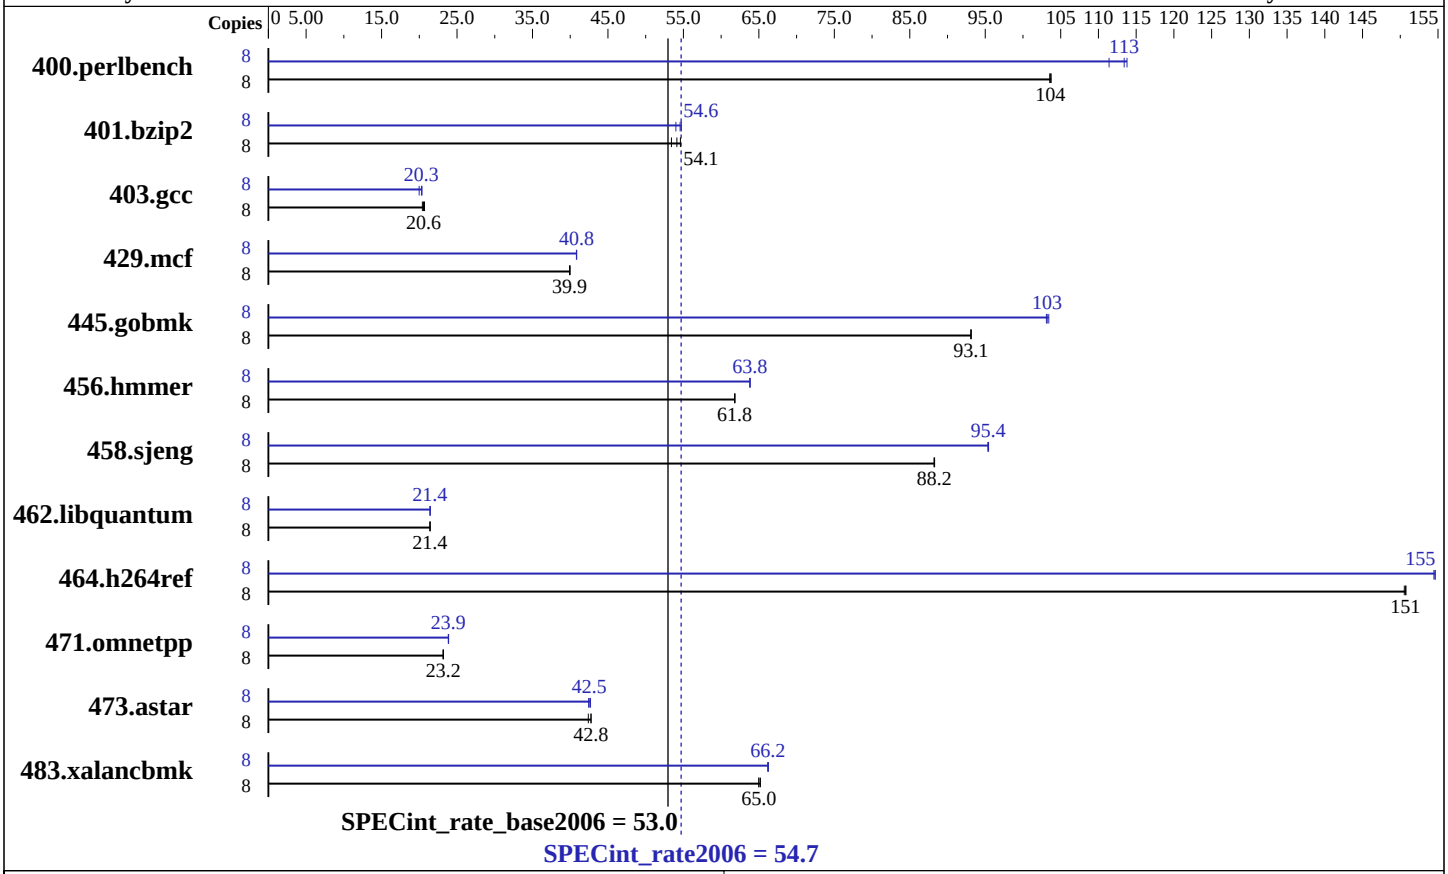

Hardware

CPU Name:	Intel Xeon E5320
CPU Characteristics:	1.86 GHz, 8 MB L2, 1066 MHz bus
CPU MHz:	1860
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	12 GB (12x1 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem:	1x73 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise X64 Edition Service Pack1
Compiler:	Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.033 Build no 20061103Z Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.0 (shlW32M.lib)

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor E5320,1.86GHz)

SPECint_rate2006 = 54.7

SPECint_rate_base2006 = 53.0

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	753	104	**754**	**104**	755	104	8	702	111	**689**	**113**	687	114
401.bzip2	8	1445	53.4	1414	54.6	**1426**	**54.1**	8	1430	54.0	1411	54.7	**1415**	**54.6**
403.gcc	8	3113	20.7	**3132**	**20.6**	3156	20.4	8	3223	20.0	**3175**	**20.3**	3163	20.4
429.mcf	8	1825	40.0	1828	39.9	**1827**	**39.9**	8	1786	40.9	**1786**	**40.8**	1787	40.8
445.gobmk	8	901	93.1	**901**	**93.1**	901	93.1	8	811	103	814	103	**813**	**103**
456.hmmer	8	1208	61.8	1207	61.8	**1208**	**61.8**	8	1170	63.8	1169	63.8	**1169**	**63.8**
458.sjeng	8	1097	88.2	**1097**	**88.2**	1096	88.3	8	1014	95.4	**1014**	**95.4**	1015	95.3
462.libquantum	8	**7736**	**21.4**	7735	21.4	7740	21.4	8	7733	21.4	7734	21.4	**7733**	**21.4**
464.h264ref	8	1176	151	**1175**	**151**	1174	151	8	1146	154	1145	155	**1145**	**155**
471.omnetpp	8	2159	23.2	2156	23.2	**2158**	**23.2**	8	**2096**	**23.9**	2093	23.9	2096	23.8
473.astar	8	1325	42.4	**1314**	**42.8**	1313	42.8	8	1323	42.4	1315	42.7	**1321**	**42.5**
483.xalancbmk	8	**849**	**65.0**	849	65.0	847	65.2	8	833	66.3	**834**	**66.2**	834	66.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Other Configuration Notes

The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R460 model.
```

Base Compiler Invocation

C benchmarks:
`icl -Qvc7.1 -Qc99`

C++ benchmarks:
`icl -Qvc7.1`

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`

Continued on next page

Base Portability Flags (Continued)

464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:
`-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

C++ benchmarks:
`-fast -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
`icl -Qvc7.1 -Qc99`

C++ benchmarks:
`icl -Qvc7.1`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Peak Optimization Flags

C benchmarks:
`-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

C++ benchmarks:
`-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/flags.20090714.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/flags.20090714.00.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:42:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 May 2007.