



# SPEC® CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY RX100 S4, Intel Xeon processor 3070,  
2.67 GHz

SPECfp®\_rate2006 = 25.9

SPECfp\_rate\_base2006 = 25.0

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: May-2007

Software Availability: Feb-2007

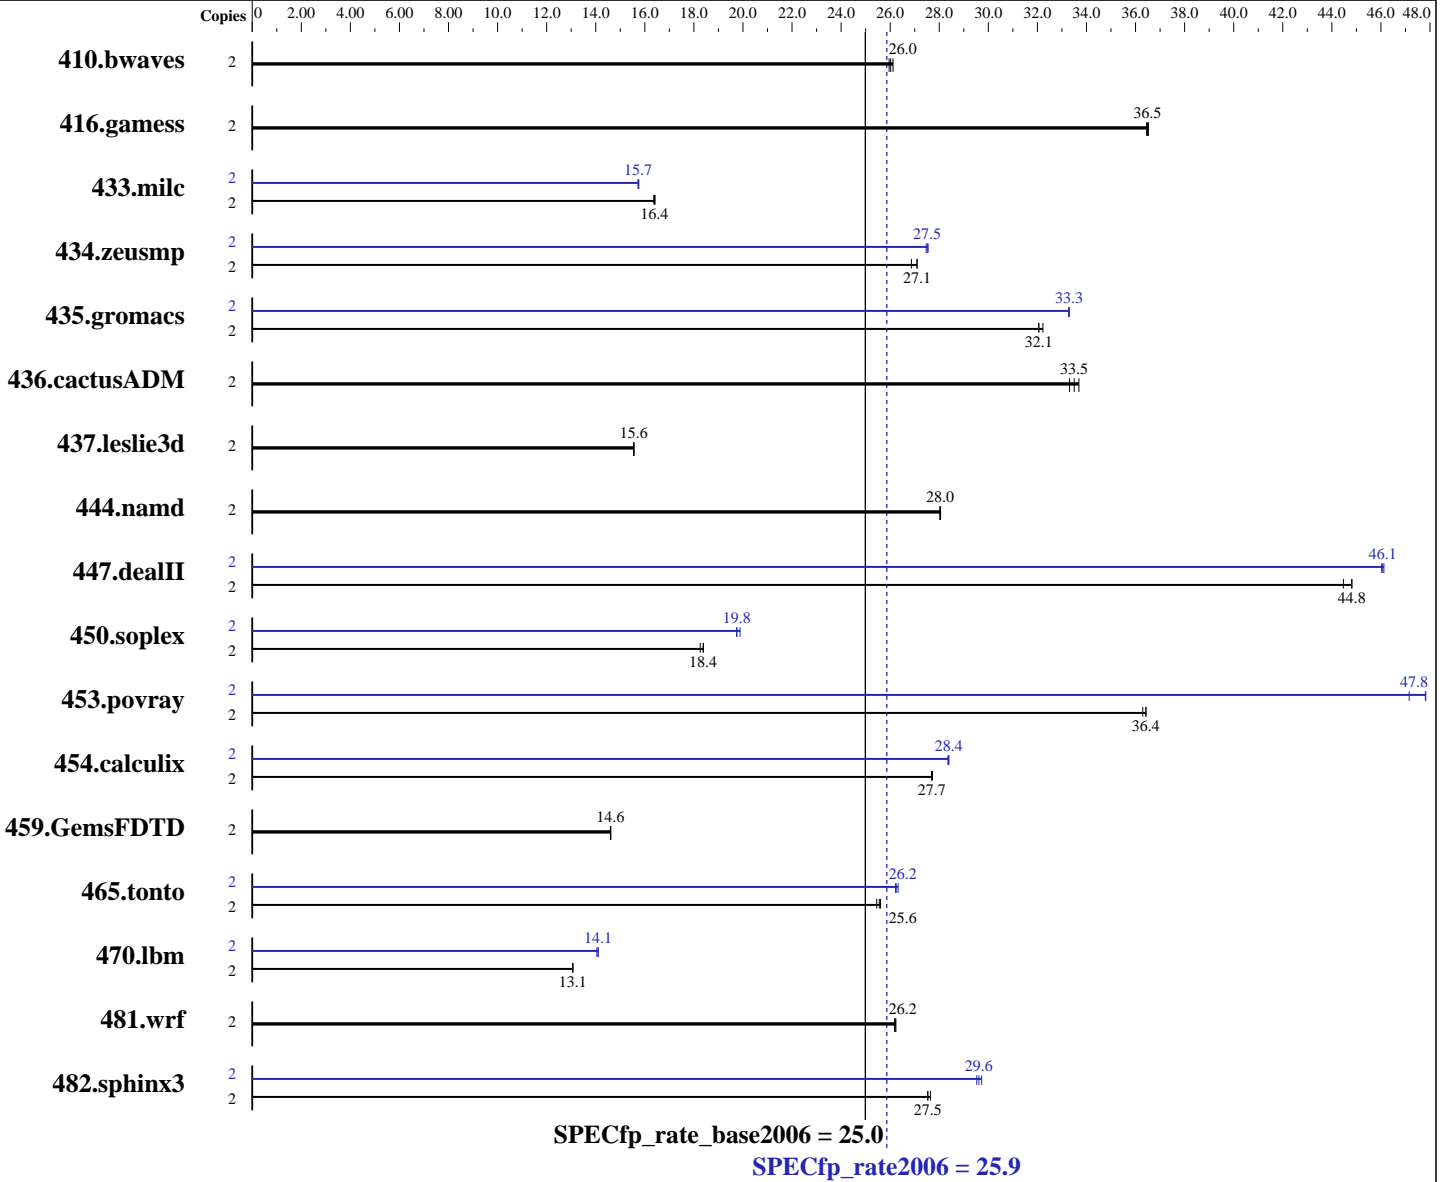

### Hardware

CPU Name: Intel Xeon 3070  
 CPU Characteristics: 1067 MHz system bus  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86\_64  
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l\_cc\_p\_9.1.047  
 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package ID: l\_fc\_p\_9.1.043  
 Auto Parallel: No  
 File System: ReiserFS

Continued on next page



# SPEC CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECfp\_rate2006 = 25.9

PRIMERGY RX100 S4, Intel Xeon processor 3070, 2.67 GHz

SPECfp\_rate\_base2006 = 25.0

CPU2006 license: 22

Test date: May-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

### Hardware (Continued)

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (4x2 GB DDR2 PC2-4200E, 2 rank, CAS 4-4-4, with ECC)  
Disk Subsystem: SATA (160 GB, 7200 rpm)  
Other Hardware: None

### Software (Continued)

System State: Multiuser, Runlevel 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1041	26.1	<b>1045</b>	<b>26.0</b>	1047	26.0	2	1041	26.1	<b>1045</b>	<b>26.0</b>	1047	26.0
416.gamess	2	1072	36.5	1074	36.5	<b>1073</b>	<b>36.5</b>	2	1072	36.5	1074	36.5	<b>1073</b>	<b>36.5</b>
433.milc	2	1122	16.4	1118	16.4	<b>1120</b>	<b>16.4</b>	2	1165	15.8	1167	15.7	<b>1167</b>	<b>15.7</b>
434.zeusmp	2	677	26.9	672	27.1	<b>672</b>	<b>27.1</b>	2	663	27.5	661	27.5	<b>662</b>	<b>27.5</b>
435.gromacs	2	<b>445</b>	<b>32.1</b>	446	32.1	443	32.2	2	<b>429</b>	<b>33.3</b>	429	33.3	429	33.3
436.cactusADM	2	717	33.3	709	33.7	<b>713</b>	<b>33.5</b>	2	717	33.3	709	33.7	<b>713</b>	<b>33.5</b>
437.leslie3d	2	<b>1209</b>	<b>15.6</b>	1209	15.6	1209	15.6	2	<b>1209</b>	<b>15.6</b>	1209	15.6	1209	15.6
444.namd	2	572	28.1	572	28.0	<b>572</b>	<b>28.0</b>	2	572	28.1	572	28.0	<b>572</b>	<b>28.0</b>
447.dealII	2	515	44.5	<b>511</b>	<b>44.8</b>	511	44.8	2	497	46.0	<b>497</b>	<b>46.1</b>	496	46.1
450.soplex	2	914	18.3	<b>908</b>	<b>18.4</b>	907	18.4	2	<b>844</b>	<b>19.8</b>	845	19.7	839	19.9
453.povray	2	<b>292</b>	<b>36.4</b>	293	36.3	292	36.4	2	222	47.8	226	47.2	<b>223</b>	<b>47.8</b>
454.calculix	2	595	27.7	<b>596</b>	<b>27.7</b>	596	27.7	2	582	28.4	<b>581</b>	<b>28.4</b>	581	28.4
459.GemsFDTD	2	<b>1453</b>	<b>14.6</b>	1454	14.6	1452	14.6	2	<b>1453</b>	<b>14.6</b>	1454	14.6	1452	14.6
465.tonto	2	769	25.6	773	25.5	<b>770</b>	<b>25.6</b>	2	<b>750</b>	<b>26.2</b>	751	26.2	748	26.3
470.lbm	2	2105	13.1	2102	13.1	<b>2104</b>	<b>13.1</b>	2	1957	14.0	1949	14.1	<b>1950</b>	<b>14.1</b>
481.wrf	2	853	26.2	852	26.2	<b>852</b>	<b>26.2</b>	2	853	26.2	852	26.2	<b>852</b>	<b>26.2</b>
482.sphinx3	2	<b>1416</b>	<b>27.5</b>	1410	27.6	1416	27.5	2	1320	29.5	1311	29.7	<b>1316</b>	<b>29.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## General Notes

The system bus runs at 1067 MHz

All binaries were built with 64-bit Intel compiler except:  
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with  
32-bit Intel compiler by changing the path for include and library files.

Continued on next page



# SPEC CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY RX100 S4, Intel Xeon processor 3070,  
2.67 GHz

**SPECfp\_rate2006 = 25.9**

**SPECfp\_rate\_base2006 = 25.0**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

## General Notes (Continued)

For information about Fujitsu Siemens Computers in your country please see:  
<http://www.fujitsu-siemens.com/countries>

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



# SPEC CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY RX100 S4, Intel Xeon processor 3070,  
2.67 GHz

**SPECfp\_rate2006 = 25.9**

**SPECfp\_rate\_base2006 = 25.0**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

## Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks:

/opt/intel/cc/9.1.047/bin/icc -I/opt/intel/cc/9.1.047/include  
-L/opt/intel/cc/9.1.047/lib

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/9.1.047/bin/icpc  
-I/opt/intel/cc/9.1.047/include -L/opt/intel/cc/9.1.047/lib

Fortran benchmarks (except as noted below):

ifort

434.zeusmp: /opt/intel/fc/9.1.043/bin/ifort  
-I/opt/intel/fc/9.1.043/include -L/opt/intel/fc/9.1.043/lib

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY RX100 S4, Intel Xeon processor 3070,  
2.67 GHz

**SPECfp\_rate2006 = 25.9**

**SPECfp\_rate\_base2006 = 25.0**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

## Peak Optimization Flags

C benchmarks:

433.milc: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

470.lbm: Same as 433.milc

482.sphinx3: -fast

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

Benchmarks using both Fortran and C:

435.gromacs: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20070417.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20070417.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20070417.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20070417.xml)



# SPEC CFP2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY RX100 S4, Intel Xeon processor 3070,  
2.67 GHz

**SPECfp\_rate2006 = 25.9**

**SPECfp\_rate\_base2006 = 25.0**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Sun Dec 16 02:52:35 2007 by SPEC CPU2006 PS/PDF formatter v5614.