SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor X5355,2.66GHz)

SPECint®2006 = 16.0

SPECint_base2006 = 15.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

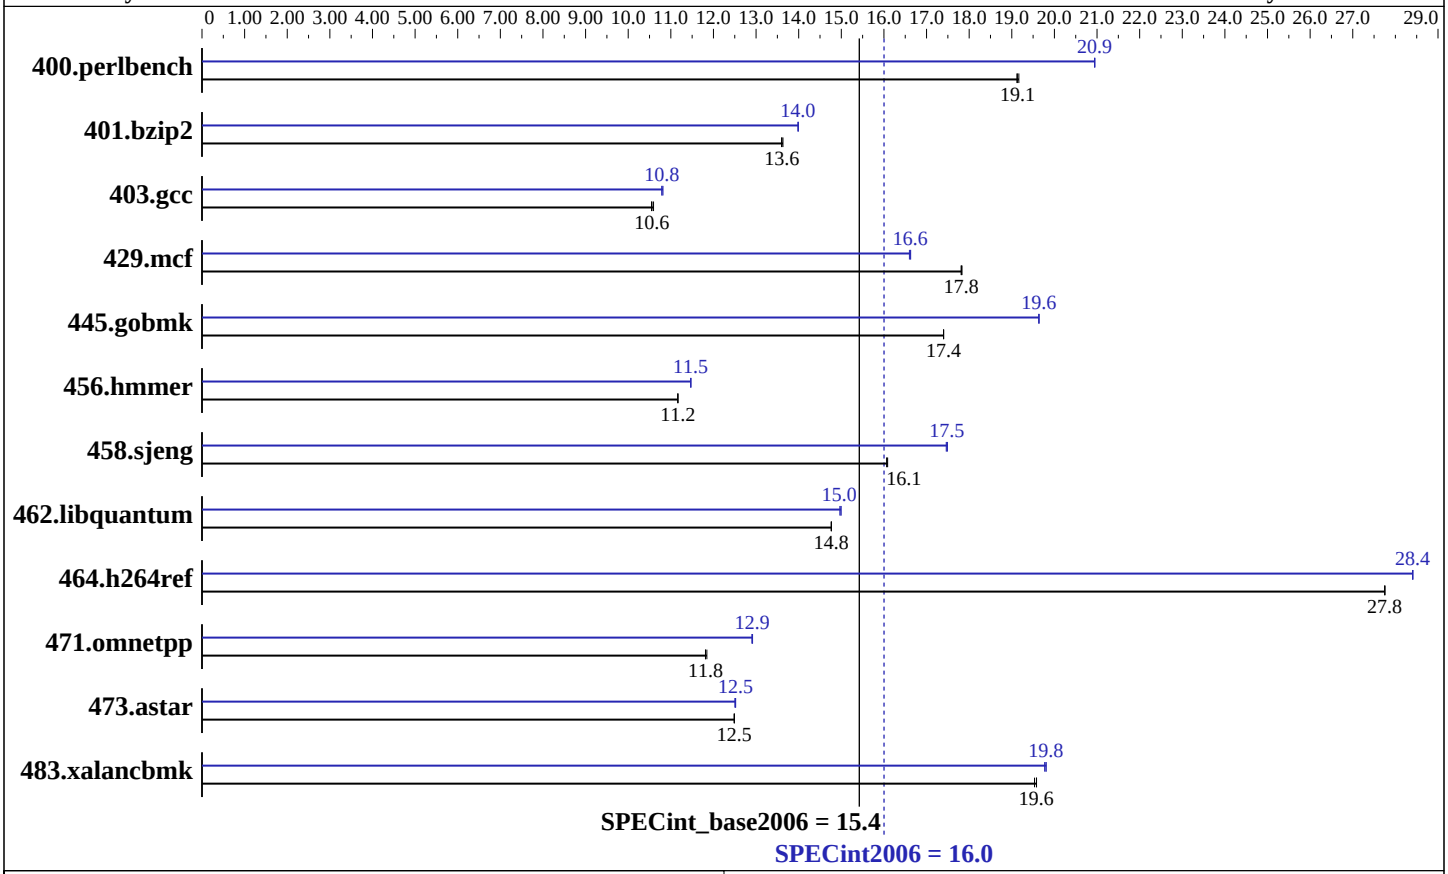

Hardware

CPU Name:	Intel Xeon X5355
CPU Characteristics:	2.66 GHz, 8 MB L2, 1333 MHz bus
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	24 GB (12x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem:	1x73 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 R2 Enterprise X64 Edition Service Pack1
Compiler:	Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.033 Build no 20061103Z Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.0 (shlW32M.lib)

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor X5355,2.66GHz)

SPECint2006 = 16.0

SPECint_base2006 = 15.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	510	19.2	**511**	**19.1**	511	19.1	467	20.9	466	20.9	**466**	**20.9**
401.bzip2	708	13.6	710	13.6	**709**	**13.6**	**690**	**14.0**	690	14.0	690	14.0
403.gcc	760	10.6	**762**	**10.6**	763	10.5	744	10.8	746	10.8	**746**	**10.8**
429.mcf	**512**	**17.8**	512	17.8	511	17.8	549	16.6	549	16.6	**549**	**16.6**
445.gobmk	**603**	**17.4**	603	17.4	603	17.4	**534**	**19.6**	534	19.6	534	19.6
456.hmmer	836	11.2	836	11.2	**836**	**11.2**	814	11.5	**814**	**11.5**	814	11.5
458.sjeng	**753**	**16.1**	753	16.1	752	16.1	692	17.5	693	17.5	**692**	**17.5**
462.libquantum	1403	14.8	**1403**	**14.8**	1403	14.8	1382	15.0	**1382**	**15.0**	1385	15.0
464.h264ref	797	27.8	**797**	**27.8**	797	27.8	**779**	**28.4**	779	28.4	779	28.4
471.omnetpp	**529**	**11.8**	529	11.8	528	11.8	484	12.9	484	12.9	**484**	**12.9**
473.astar	562	12.5	562	12.5	**562**	**12.5**	562	12.5	561	12.5	**561**	**12.5**
483.xalancbmk	**352**	**19.6**	353	19.5	352	19.6	349	19.8	**348**	**19.8**	348	19.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
/NUMPROC=1 flag was added to boot.ini to invoke
uniprocessor environment
```

General Notes

```
The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R440 model.
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Peak Optimization Flags

C benchmarks:
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

C++ benchmarks:
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/flags.20090714.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/flags.20090714.00.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:41:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 May 2007.