SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor 5140,2.33GHz)

SPECint®2006 = 14.5

SPECint_base2006 = 13.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Feb-2007
Software Availability: Dec-2006

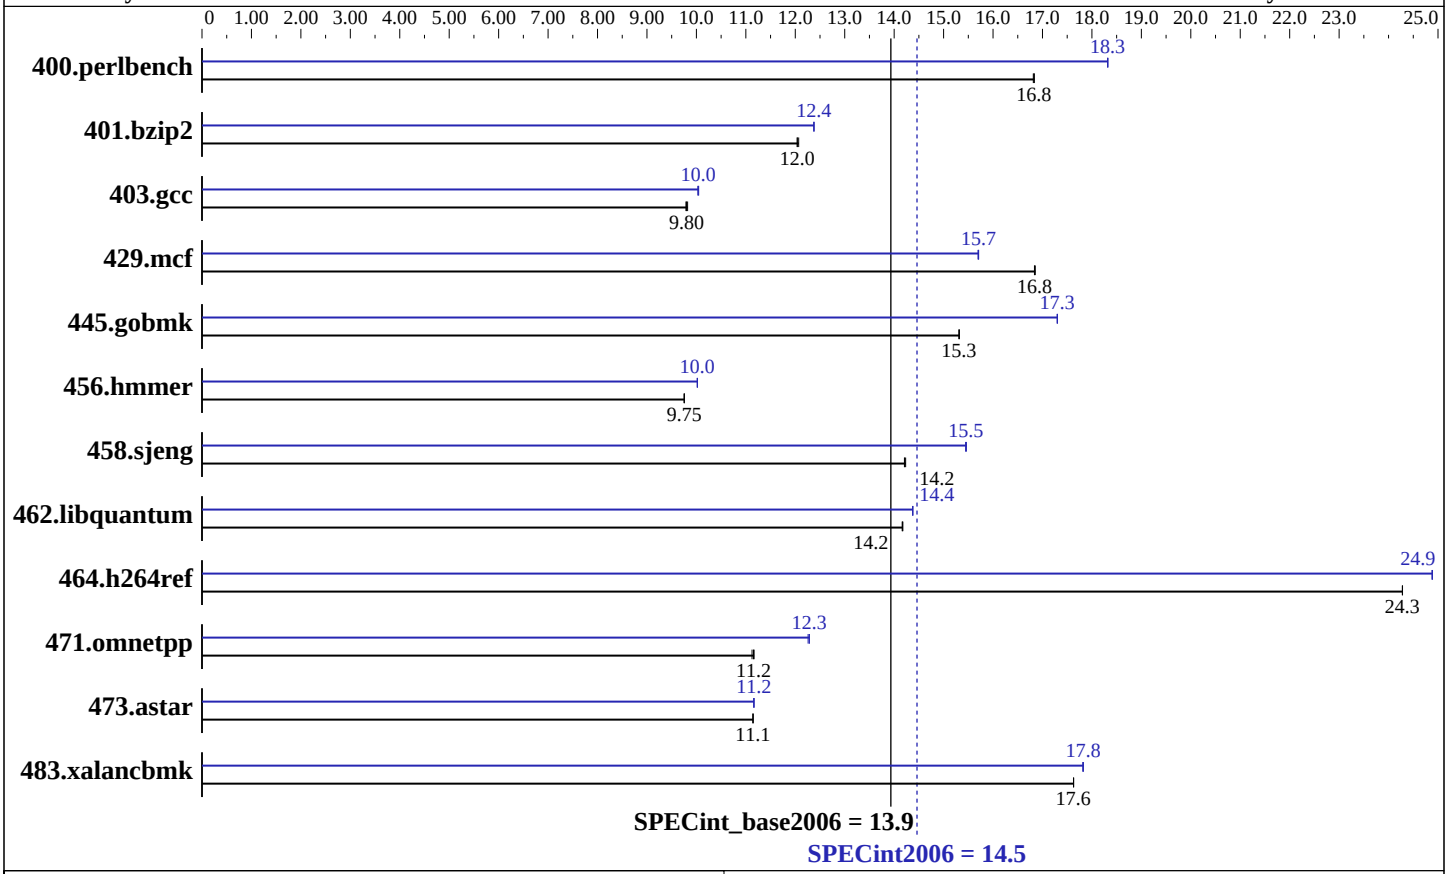

Hardware

CPU Name:	Intel Xeon 5140
CPU Characteristics:	2.33 GHz, 4 MB L2, 1333 MHz system bus
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	24 GB (12x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem:	1x73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition X64 Edition Service Pack1
Compiler:	Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.033 Build no 20061103Z Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.0 (shlW32M.lib)

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor 5140,2.33GHz)

SPECint2006 = 14.5

SPECint_base2006 = 13.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Feb-2007
Software Availability: Dec-2006

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	580	16.8	**581**	**16.8**	581	16.8	533	18.3	533	18.3	**533**	**18.3**
401.bzip2	800	12.1	**801**	**12.0**	802	12.0	780	12.4	780	12.4	**780**	**12.4**
403.gcc	820	9.82	**821**	**9.80**	822	9.79	**802**	**10.0**	803	10.0	801	10.0
429.mcf	542	16.8	**541**	**16.8**	541	16.9	581	15.7	581	15.7	**581**	**15.7**
445.gobmk	685	15.3	**685**	**15.3**	685	15.3	606	17.3	606	17.3	**606**	**17.3**
456.hmmer	956	9.76	957	9.75	**957**	**9.75**	**931**	**10.0**	931	10.0	931	10.0
458.sjeng	850	14.2	852	14.2	**851**	**14.2**	783	15.5	**783**	**15.5**	783	15.4
462.libquantum	1462	14.2	1463	14.2	**1463**	**14.2**	1441	14.4	1441	14.4	**1441**	**14.4**
464.h264ref	911	24.3	**911**	**24.3**	911	24.3	889	24.9	**889**	**24.9**	889	24.9
471.omnetpp	562	11.1	**560**	**11.2**	560	11.2	509	12.3	510	12.3	**509**	**12.3**
473.astar	630	11.1	**630**	**11.1**	630	11.1	**629**	**11.2**	629	11.2	629	11.2
483.xalancbmk	391	17.6	**391**	**17.6**	391	17.6	387	17.8	**387**	**17.8**	387	17.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
/NUMPROC=1 flags was added to boot.ini invoke
uniprocessor environment
```

General Notes

```
The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R460 model.
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:
```
-fast /F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib
            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:
```
icl -Qvc7.1
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Peak Optimization Flags

C benchmarks:
```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000 shlw32m.lib
            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/flags.20090714.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/flags.20090714.00.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:04:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2007.