SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rg-1
(Intel Xeon processor 5160)

SPECint®2006 = 21.0

SPECint_base2006 = 19.1

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jun-2007
Hardware Availability: May-2007
Software Availability: Jun-2007

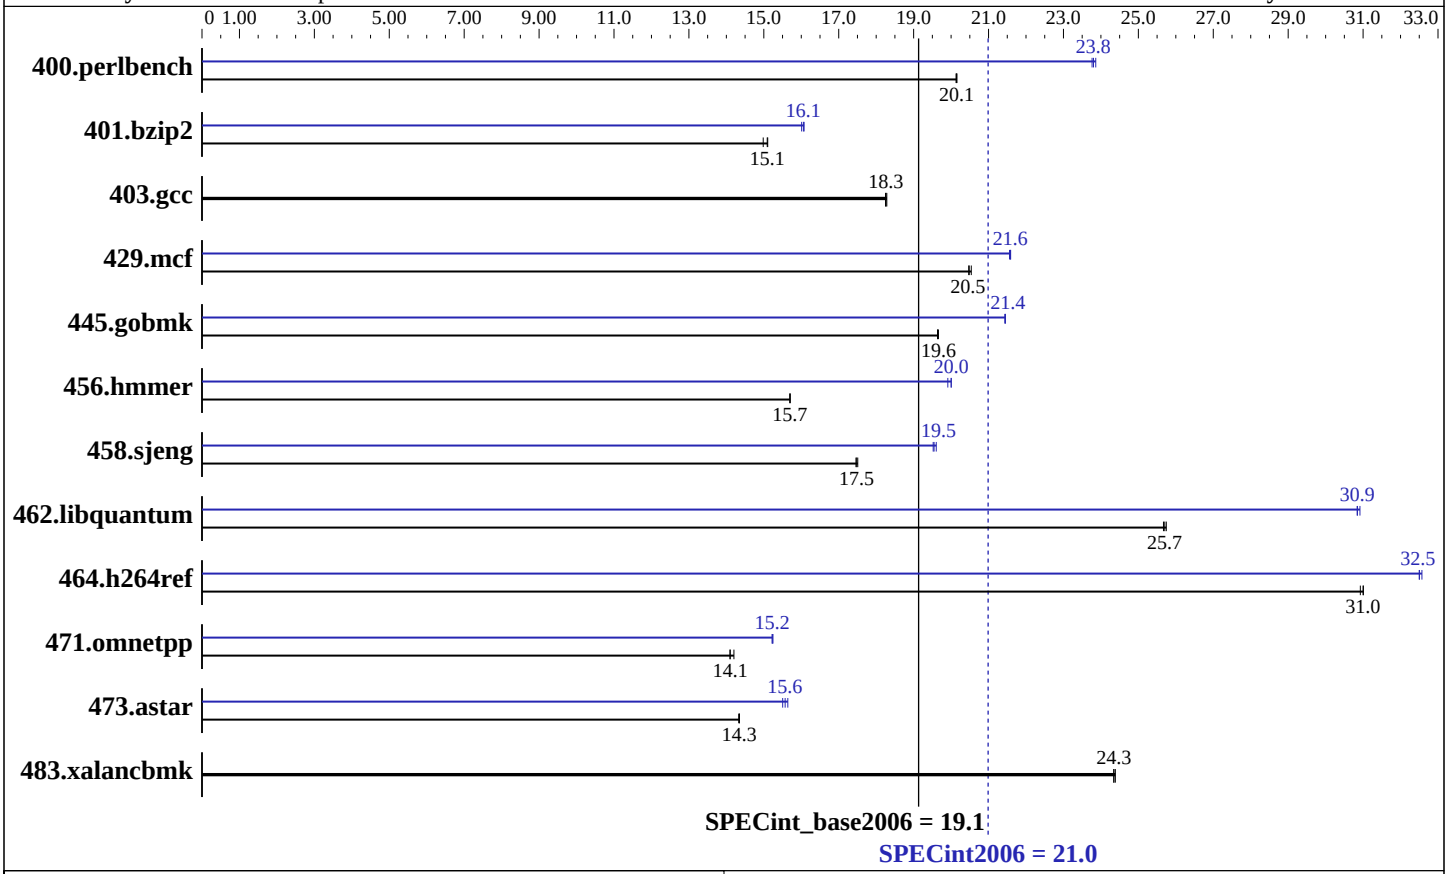

Hardware

CPU Name:	Intel Xeon 5160
CPU Characteristics:	3.00 GHz, 4MB L2, 1333MHz bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (4x2 GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73.2 GB SAS, 15000RPM
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp for x86_64
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070426 Package ID: l_cc_p_10.0.023
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rg-1
(Intel Xeon processor 5160)

SPECint2006 = 21.0

SPECint_base2006 = 19.1

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jun-2007
Hardware Availability: May-2007
Software Availability: Jun-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	485	20.2	485	20.1	**485**	**20.1**	409	23.9	**410**	**23.8**	411	23.8
401.bzip2	639	15.1	644	15.0	**639**	**15.1**	**601**	**16.1**	603	16.0	600	16.1
403.gcc	440	18.3	441	18.2	**441**	**18.3**	440	18.3	441	18.2	**441**	**18.3**
429.mcf	446	20.5	**445**	**20.5**	444	20.5	423	21.6	**423**	**21.6**	422	21.6
445.gobmk	534	19.7	534	19.6	**534**	**19.6**	489	21.5	**489**	**21.4**	489	21.4
456.hmmer	**594**	**15.7**	594	15.7	594	15.7	466	20.0	469	19.9	**466**	**20.0**
458.sjeng	691	17.5	**692**	**17.5**	693	17.5	617	19.6	**619**	**19.5**	620	19.5
462.libquantum	**806**	**25.7**	807	25.7	805	25.7	670	30.9	**672**	**30.9**	672	30.8
464.h264ref	716	30.9	**714**	**31.0**	714	31.0	681	32.5	**681**	**32.5**	679	32.6
471.omnetpp	440	14.2	**443**	**14.1**	443	14.1	**410**	**15.2**	410	15.2	411	15.2
473.astar	490	14.3	**489**	**14.3**	489	14.4	**451**	**15.6**	449	15.6	453	15.5
483.xalancbmk	**283**	**24.3**	283	24.4	283	24.3	**283**	**24.3**	283	24.4	283	24.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode

The Express5800/120Rg-1(Intel Xeon processor 5160) and
the Express5800/120Ri-2(Intel Xeon processor 5160) models are electronically equivalent.
The results have been measured on a Express5800/120Ri-2(Intel Xeon processor 5160) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc

456.hmmer: /opt/intel/cce/10.0.023/bin/icc

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -L/opt/intel/cce/10.0.023/lib -I/opt/intel/cce/10.0.023/include -prof-gen(pass 1) -prof-use(pass 2) -fast

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec_div -ansi-alias

456.hmmer: -L/opt/intel/cce/10.0.023/lib -I/opt/intel/cce/10.0.023/include -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec_div -ansi-alias -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/NEC-ic10-linux-flags.20090714.00.html

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-ic10-linux-flags.20090714.00.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:22:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 July 2007.