SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Ri-2
(Intel Xeon processor X5355)

SPECint®2006 = 18.9

SPECint_base2006 = 17.2

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jun-2007
Hardware Availability: Jan-2007
Software Availability: Jun-2007

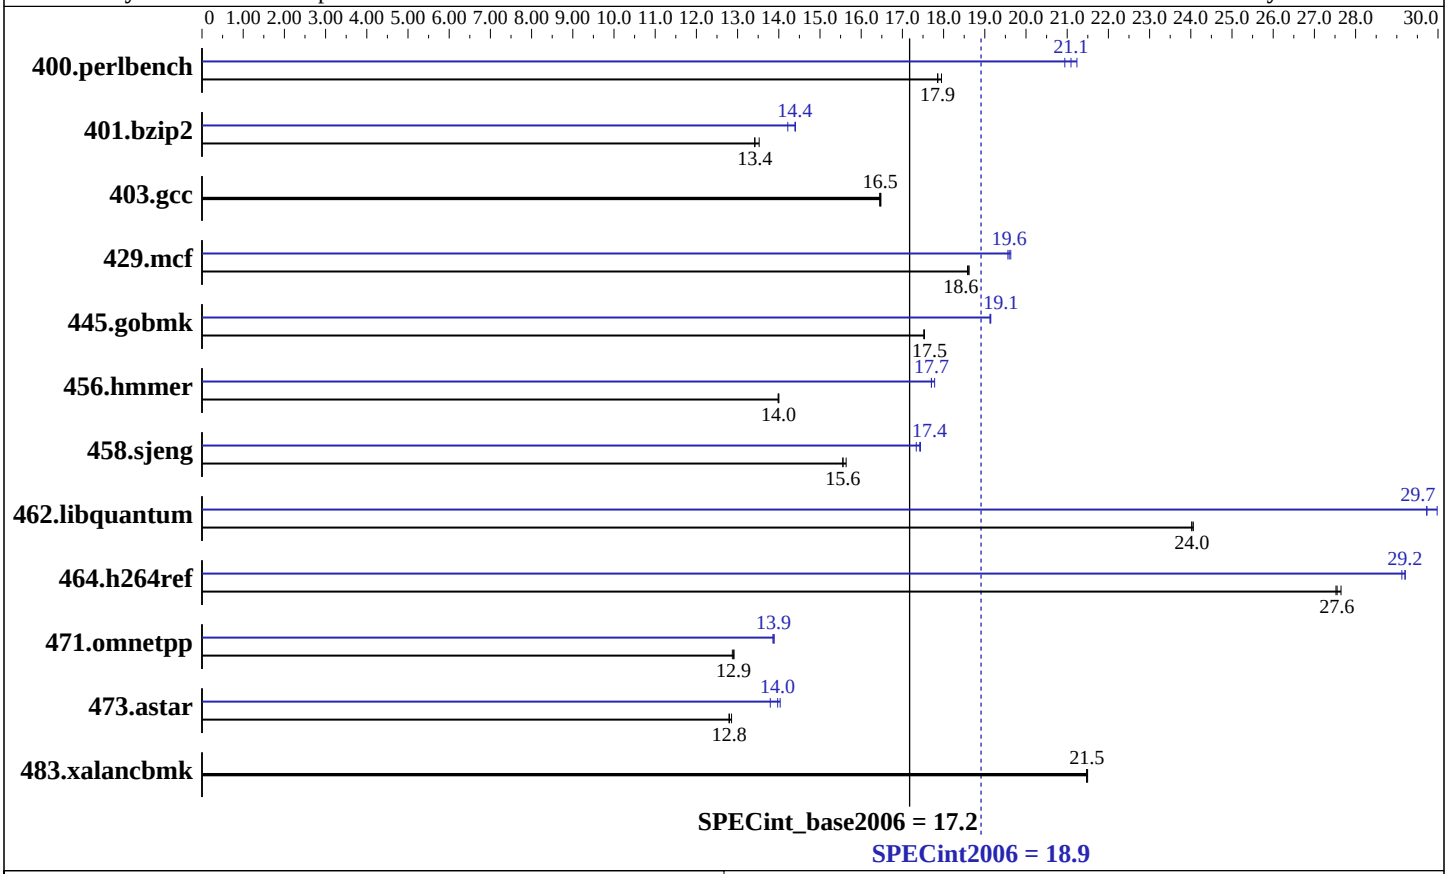

Hardware

CPU Name:	Intel Xeon X5355
CPU Characteristics:	2.66 GHz, 2x4 MB L2 shared, 1333 MHz bus
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73.2 GB SAS, 15000RPM
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp for x86_64
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070426 Package ID: l_cc_p_10.0.023
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Ri-2
(Intel Xeon processor X5355)

SPECint2006 = 18.9

SPECint_base2006 = 17.2

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jun-2007
Hardware Availability: Jan-2007
Software Availability: Jun-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	544	17.9	547	17.9	**547**	**17.9**	**463**	**21.1**	460	21.2	467	20.9
401.bzip2	**719**	**13.4**	714	13.5	719	13.4	670	14.4	679	14.2	**671**	**14.4**
403.gcc	**489**	**16.5**	489	16.4	489	16.5	**489**	**16.5**	489	16.4	489	16.5
429.mcf	**490**	**18.6**	491	18.6	490	18.6	465	19.6	466	19.6	**465**	**19.6**
445.gobmk	**598**	**17.5**	599	17.5	598	17.5	**548**	**19.1**	548	19.1	548	19.1
456.hmmer	667	14.0	**667**	**14.0**	667	14.0	**527**	**17.7**	527	17.7	525	17.8
458.sjeng	778	15.6	**778**	**15.6**	774	15.6	698	17.3	**695**	**17.4**	694	17.4
462.libquantum	863	24.0	**862**	**24.0**	861	24.1	697	29.7	**697**	**29.7**	691	30.0
464.h264ref	800	27.6	804	27.5	**803**	**27.6**	758	29.2	**758**	**29.2**	760	29.1
471.omnetpp	486	12.9	**484**	**12.9**	484	12.9	**450**	**13.9**	451	13.9	450	13.9
473.astar	549	12.8	**548**	**12.8**	546	12.9	509	13.8	**502**	**14.0**	500	14.0
483.xalancbmk	321	21.5	**321**	**21.5**	321	21.5	321	21.5	**321**	**21.5**	321	21.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode

The Express5800/120Rg-1(Intel Xeon processor X5355) and
the Express5800/120Ri-2(Intel Xeon processor X5355) models are electronically equivalent.
The results have been measured on a Express5800/120Ri-2(Intel Xeon processor X5355) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/opt/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/cce/10.0.023/bin/icc`

456.hmmer: `/opt/intel/cce/10.0.023/bin/icc`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-L/opt/intel/cce/10.0.023/lib -I/opt/intel/cce/10.0.023/include -prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

403.gcc: `basepeak = yes`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec_div -ansi-alias`

456.hmmer: `-L/opt/intel/cce/10.0.023/lib -I/opt/intel/cce/10.0.023/include -prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec_div -ansi-alias -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

473.astar: `Same as 471.omnetpp`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-ic10-linux-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-ic10-linux-flags.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:21:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 July 2007.