



SPEC® CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®_rate2006 = 107

PRIMERGY TX300 S3, Intel Xeon processor X5365, 3.0 GHz

SPECint_rate_base2006 = 98.9

CPU2006 license: 22


Test date: Jul-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Aug-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Jun-2007

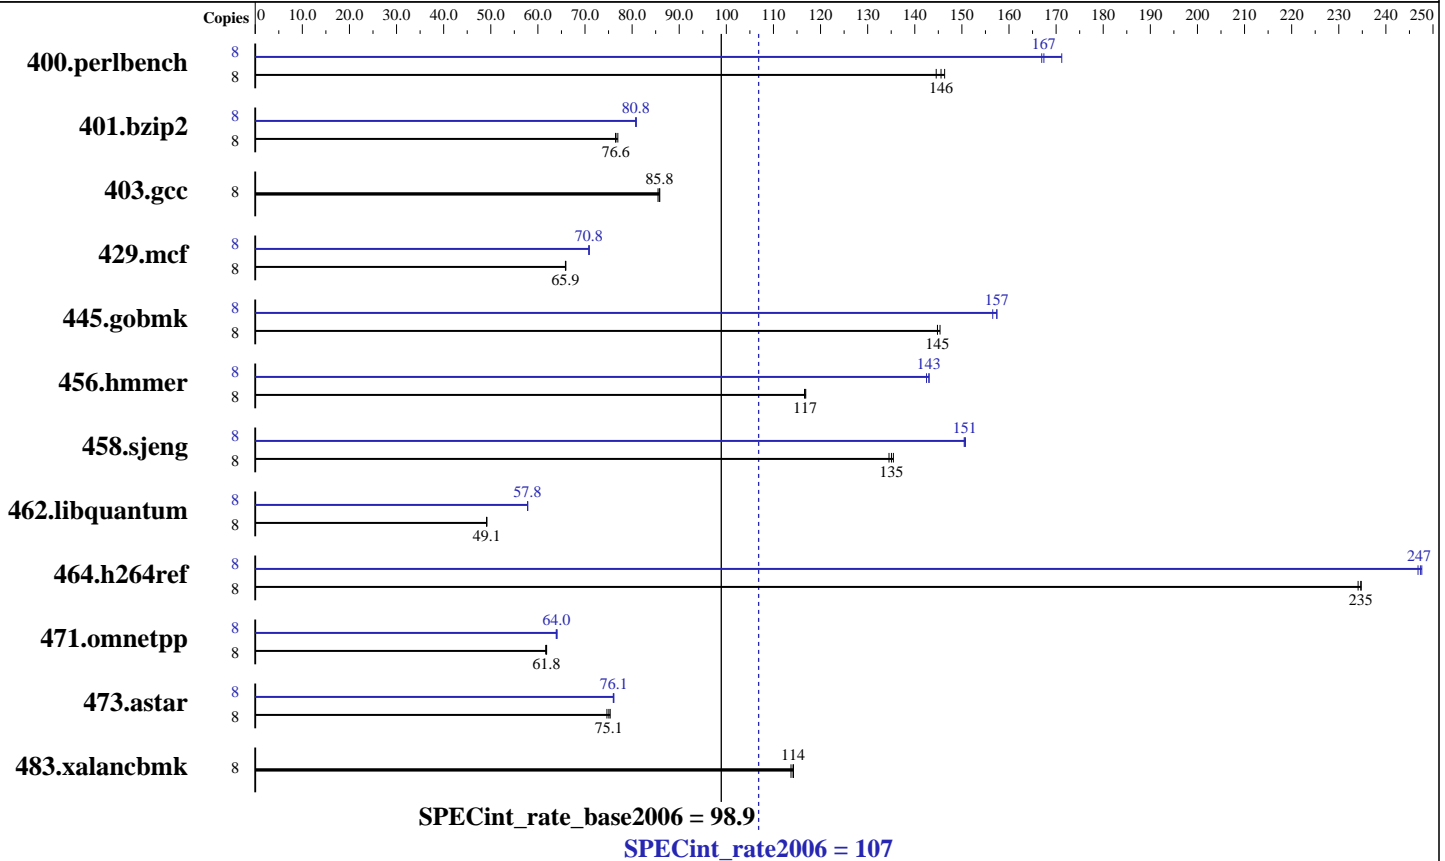

Hardware

CPU Name: Intel Xeon X5365
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8x1 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
 Disk Subsystem: Seagate ST3146854SS (SAS, 146GB, 15000rpm)
 Other Hardware: None

Software

Operating System: SUSE LINUX Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070308, Package-ID: I_cc_p_10.0.023
 Auto Parallel: No
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Smart Heap Library, Version 8.1
 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor X5365,
3.0 GHz

SPECint_rate2006 = 107

SPECint_rate_base2006 = 98.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jul-2007

Hardware Availability: Aug-2007

Software Availability: Jun-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	534	146	<u>537</u>	<u>146</u>	541	145	8	457	171	468	167	<u>467</u>	<u>167</u>
401.bzip2	8	1003	77.0	<u>1008</u>	<u>76.6</u>	1009	76.5	8	<u>955</u>	<u>80.8</u>	954	80.9	956	80.8
403.gcc	8	750	85.9	753	85.5	<u>751</u>	<u>85.8</u>	8	750	85.9	753	85.5	<u>751</u>	<u>85.8</u>
429.mcf	8	1108	65.8	<u>1108</u>	<u>65.9</u>	1107	65.9	8	<u>1030</u>	<u>70.8</u>	1029	70.9	1030	70.8
445.gobmk	8	577	145	<u>579</u>	<u>145</u>	579	145	8	533	157	<u>533</u>	<u>157</u>	536	157
456.hmmmer	8	<u>640</u>	<u>117</u>	640	117	639	117	8	522	143	524	142	<u>522</u>	<u>143</u>
458.sjeng	8	715	135	720	135	<u>717</u>	<u>135</u>	8	<u>643</u>	<u>151</u>	642	151	643	150
462.libquantum	8	3373	49.1	<u>3374</u>	<u>49.1</u>	3374	49.1	8	2868	57.8	<u>2867</u>	<u>57.8</u>	2866	57.8
464.h264ref	8	756	234	<u>754</u>	<u>235</u>	754	235	8	715	248	<u>716</u>	<u>247</u>	717	247
471.omnetpp	8	<u>809</u>	<u>61.8</u>	811	61.7	808	61.8	8	783	63.9	780	64.1	<u>781</u>	<u>64.0</u>
473.astar	8	752	74.7	<u>748</u>	<u>75.1</u>	745	75.3	8	738	76.1	739	76.0	<u>738</u>	<u>76.1</u>
483.xalancbmk	8	<u>484</u>	<u>114</u>	483	114	485	114	8	<u>484</u>	<u>114</u>	483	114	485	114

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmmer in peak were built with 64-bit Intel
compiler by changing the path for include and library files.

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

This result was measured on the PRIMERGY RX300 S3. The PRIMERGY RX300 S3 and
the PRIMERGY TX300 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers please see:

<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor X5365,
3.0 GHz

SPECint_rate2006 = 107

SPECint_rate_base2006 = 98.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jul-2007

Hardware Availability: Aug-2007

Software Availability: Jun-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LITTLE_ENDIAN
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xT -O3 -ipo -no-prec-div -ansi-alias
-L/opt/SmartHeap_8_1/lib -lsmarheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc
-I/opt/intel/cce/10.0.023/include
-L/opt/intel/cce/10.0.023/lib

456.hmmer: /opt/intel/cce/10.0.023/bin/icc
-I/opt/intel/cce/10.0.023/include
-L/opt/intel/cce/10.0.023/lib

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor X5365,
3.0 GHz

SPECint_rate2006 = 107

SPECint_rate_base2006 = 98.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jul-2007

Hardware Availability: Aug-2007

Software Availability: Jun-2007

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LITTLE_ENDIAN
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof_gen(pass 1) -prof_use(pass 2) -fast
401.bzip2: -fast
403.gcc: basepeak = yes
429.mcf: -prof_gen(pass 1) -prof_use(pass 2) -fast -prefetch
-L/opt/SmartHeap_8_1/lib -lsmarheap
445.gobmk: Same as 400.perlbench
456.hmmer: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
458.sjeng: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll4
462.libquantum: -prof_gen(pass 1) -prof_use(pass 2) -fast -prefetch
-opt-streaming-stores always
464.h264ref: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof_gen(pass 1) -prof_use(pass 2) -fast -ansi-alias
-L/opt/SmartHeap_8_1/lib -lsmarheap
473.astar: Same as 471.omnetpp
483.xalancbmk: basepeak = yes

Peak Other Flags

Same as Base Other Flags

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/FSC_Intel_flags.xml.html



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor X5365,
3.0 GHz

SPECint_rate2006 = 107

SPECint_rate_base2006 = 98.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jul-2007

Hardware Availability: Aug-2007

Software Availability: Jun-2007

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/FSC_Intel_flags.xml.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Sun Dec 16 05:05:18 2007 by SPEC CPU2006 PS/PDF formatter v5614.