SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 (AMD Opteron 8222 SE)

SPECfp®2006 = 14.0

SPECfp_base2006 = 13.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Apr-2007
Software Availability: Mar-2007

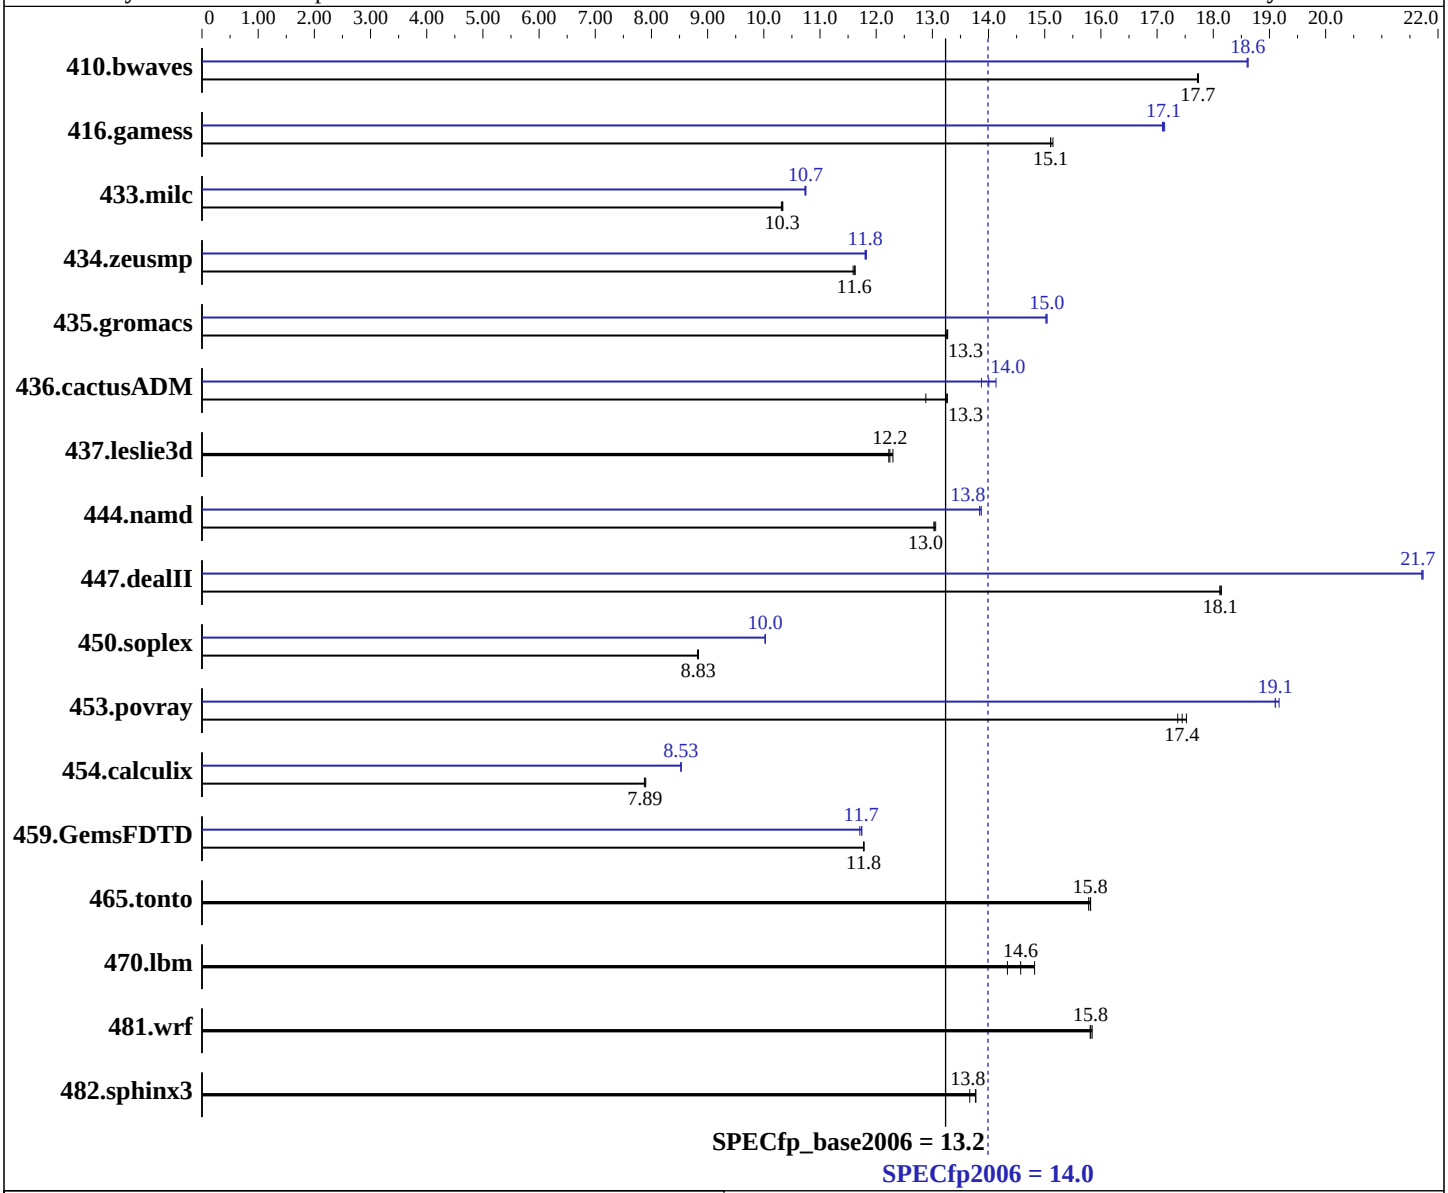

Hardware

CPU Name:	AMD Opteron 8222 SE
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1, 2, 3, 4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 (AMD Opteron 8222 SE)

SPECfp2006 = 14.0

SPECfp_base2006 = 13.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Apr-2007
Software Availability: Mar-2007

L3 Cache: None
Other Cache: None
Memory: 32 GB (16 x 2GB DDR2-5300 ECC)
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
Other Hardware: None

Other Software: MicroQuill SmartHeap 8.1

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	767	17.7	**767**	**17.7**	766	17.7	731	18.6	730	18.6	**730**	**18.6**
416.gamess	1296	15.1	1293	15.1	**1296**	**15.1**	1143	17.1	1145	17.1	**1144**	**17.1**
433.milc	**889**	**10.3**	890	10.3	888	10.3	**855**	**10.7**	855	10.7	854	10.7
434.zeusmp	783	11.6	785	11.6	**784**	**11.6**	**771**	**11.8**	769	11.8	771	11.8
435.gromacs	**538**	**13.3**	539	13.3	538	13.3	475	15.0	475	15.0	**475**	**15.0**
436.cactusADM	928	12.9	901	13.3	**902**	**13.3**	**853**	**14.0**	846	14.1	861	13.9
437.leslie3d	769	12.2	764	12.3	**768**	**12.2**	769	12.2	764	12.3	**768**	**12.2**
444.namd	616	13.0	**615**	**13.0**	614	13.1	**579**	**13.8**	578	13.9	579	13.8
447.dealII	631	18.1	630	18.1	**631**	**18.1**	**527**	**21.7**	527	21.7	526	21.7
450.soplex	946	8.82	944	8.84	**944**	**8.83**	832	10.0	832	10.0	**832**	**10.0**
453.povray	306	17.4	**305**	**17.4**	304	17.5	277	19.2	**278**	**19.1**	278	19.1
454.calculix	1048	7.87	**1046**	**7.89**	1044	7.90	**967**	**8.53**	968	8.52	967	8.53
459.GemsFDTD	**901**	**11.8**	901	11.8	900	11.8	906	11.7	**904**	**11.7**	903	11.7
465.tonto	**622**	**15.8**	624	15.8	622	15.8	**622**	**15.8**	624	15.8	622	15.8
470.lbm	927	14.8	**943**	**14.6**	958	14.3	927	14.8	**943**	**14.6**	958	14.3
481.wrf	705	15.8	707	15.8	**706**	**15.8**	705	15.8	707	15.8	**706**	**15.8**
482.sphinx3	1415	13.8	1426	13.7	**1416**	**13.8**	1415	13.8	1426	13.7	**1416**	**13.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
 taskset utility used to bind CPU(s) to processes
DSPEC_CPU_TABLE_WORKAROUND was used for portability when compiling 447.dealII
due to compilation being performed on SLES 9 SP3
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Fortran benchmarks:
-Ofast -OPT:malloc_alg=1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1

Base Other Flags

C benchmarks:
-IPA:max_jobs=2

Continued on next page

Base Other Flags (Continued)

C++ benchmarks:
`-IPA:max_jobs=2`

Fortran benchmarks:
`-IPA:max_jobs=2`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Fortran benchmarks:
`pathf95`

Benchmarks using both Fortran and C:
`pathcc pathf95`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_TABLE_WORKAROUND`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: `-Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc_alg=1`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -fno-exceptions`

447.dealII: `-Ofast -INLINE:aggressive=on -LNO:opt=0 -OPT:alias=disjoint -m32 -fno-exceptions`

450.soplex: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1 -LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions`

453.povray: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -fno-fast-math`

Fortran benchmarks:

410.bwaves: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off -LNO:ignore_feedback=off`

416.gamess: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O2 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256`

434.zeusmp: `-Ofast -CG:local_fwd_sched=on -LNO:blocking=off -LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-Ofast -LNO:fission=2 -LNO:prefetch=0`

465.tonto: `basepeak = yes`

Benchmarks using both Fortran and C:

435.gromacs: `-O3 -OPT:rsqrt=2 -OPT:ro=3`

436.cactusADM: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -LNO:prefetch=3 -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10 -LNO:full_unroll=5 -ipa`

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-Ofast -LNO:simd=0 -WOPT:mem_opnds=on`

481.wrf: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Fortran benchmarks:
`-IPA:max_jobs=2`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=2`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:22:42 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.