SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS41 (AMD Opteron 8218)

SPECint®2006 = 12.5

SPECint_base2006 = 11.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

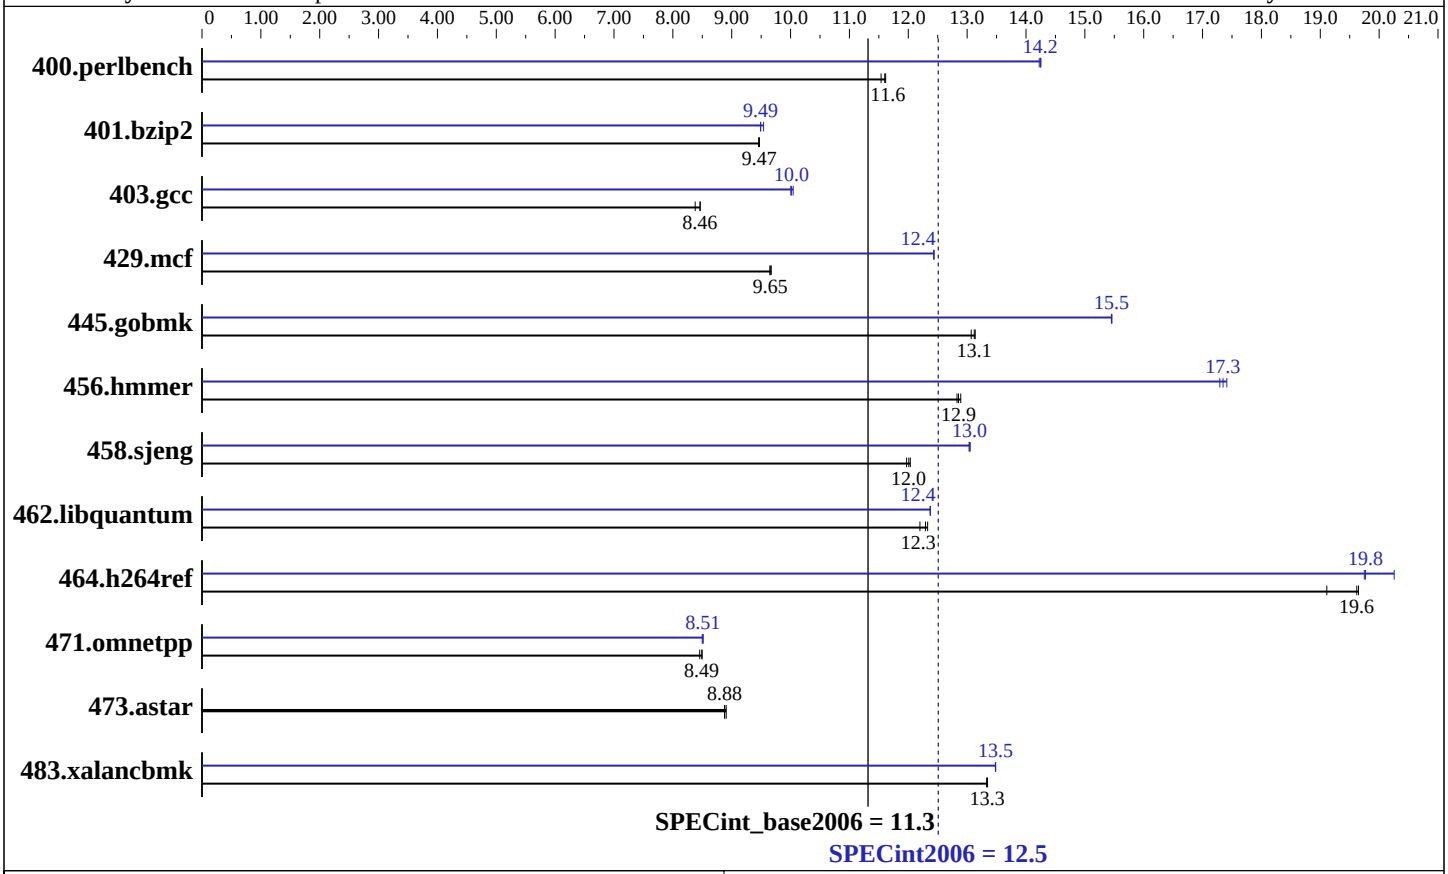

Hardware

CPU Name:	AMD Opteron 8218
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1, 2, 3, 4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	32 GB (16 x 2GB DDR2-5300 ECC)
Disk Subsystem:	1 x 36 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS41 (AMD Opteron 8218)

SPECint2006 = 12.5

SPECint_base2006 = 11.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	847	11.5	**842**	**11.6**	841	11.6	687	14.2	685	14.3	**686**	**14.2**
401.bzip2	1020	9.46	**1019**	**9.47**	1019	9.47	1011	9.54	**1017**	**9.49**	1017	9.49
403.gcc	951	8.46	**951**	**8.46**	961	8.38	801	10.0	**804**	**10.0**	805	10.0
429.mcf	945	9.65	943	9.67	**945**	**9.65**	733	12.4	733	12.4	**733**	**12.4**
445.gobmk	803	13.1	799	13.1	**799**	**13.1**	679	15.5	**679**	**15.5**	679	15.5
456.hmmer	724	12.9	**726**	**12.9**	727	12.8	540	17.3	**538**	**17.3**	536	17.4
458.sjeng	**1008**	**12.0**	1005	12.0	1011	12.0	**928**	**13.0**	927	13.1	928	13.0
462.libquantum	1699	12.2	**1686**	**12.3**	1681	12.3	1675	12.4	1674	12.4	**1674**	**12.4**
464.h264ref	**1128**	**19.6**	1158	19.1	1126	19.6	1121	19.7	1093	20.3	**1119**	**19.8**
471.omnetpp	736	8.50	739	8.46	**736**	**8.49**	**734**	**8.51**	734	8.51	735	8.50
473.astar	791	8.88	**790**	**8.88**	788	8.91	791	8.88	**790**	**8.88**	788	8.91
483.xalancbmk	517	13.3	518	13.3	**517**	**13.3**	**512**	**13.5**	512	13.5	512	13.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-Ofast -OPT:malloc_alg=1`

C++ benchmarks:
`-Ofast -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:opt=0`

401.bzip2: `-O3 -LNO:ou_prod_max=10 -OPT:Ofast -OPT:alias=disjoint`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -m32 -O3 -ipa -L/tools/SmartHeap_8.1/lib -lsmartheap

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off -WOPT:retype_expr=on

456.hmmer: -O2 -OPT:alias=disjoint -OPT:malloc_alg=1 -CG:cflow=0

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3 -IPA:plimit=50000 -IPA:pu_reorder=2

462.libquantum: -O3 -ipa -CG:local_fwd_sched=on -IPA:space=1000

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

C++ benchmarks:

471.omnetpp: -Ofast -CG:gcm=off -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -Ofast -m32 -OPT:unroll_times_max=8 -L/tools/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:
-IPA:max_jobs=2

C++ benchmarks:
-IPA:max_jobs=2

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS41 (AMD Opteron 8218)

SPECint2006 = 12.5

SPECint_base2006 = 11.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:51:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.