



# SPEC® CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DQ965GF motherboard (Intel Core 2 Quad Q6600)

SPECint®2006 = 18.2

SPECint\_base2006 = 16.3

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2007

Hardware Availability: Jan-2007

Software Availability: Aug-2006

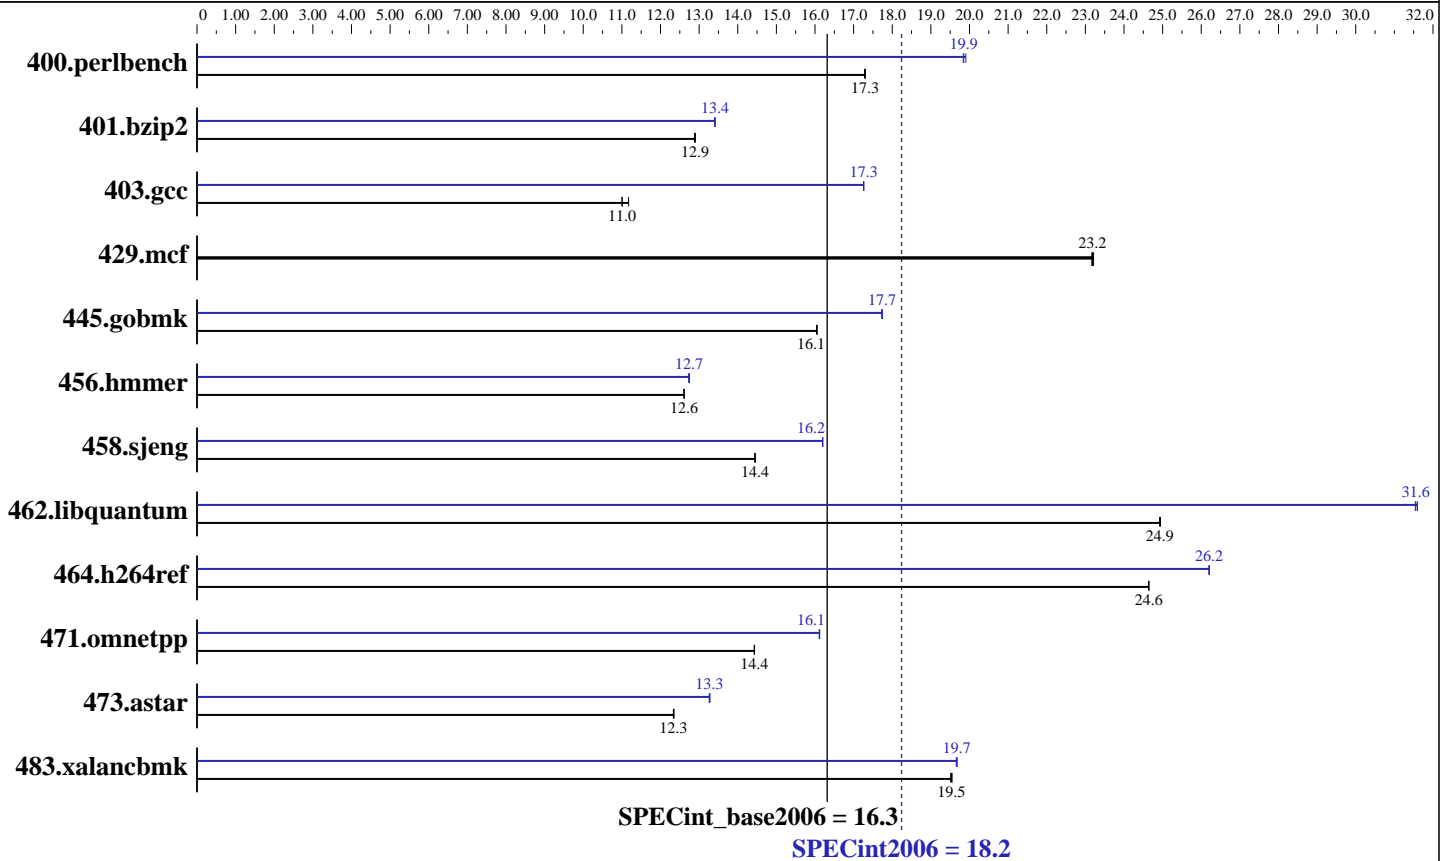

### Hardware

CPU Name: Intel Core 2 Quad Q6600  
 CPU Characteristics: 2.40 GHz, 1066 MHz bus  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 2 GB (2 1GB Micron MT16HTF12864AY-80ED4 DDR2 800, CL5)  
 Disk Subsystem: Seagate ST3320620AS 320GB Barracuda 7200.10 NCQ SATA II  
 Other Hardware: None

### Software

Operating System: Windows Vista32 Ultimate  
 Compiler: Intel C++ Compiler for IA32 version 10.0 Build 20070426 Package ID: W\_CC\_P\_10.0.025 Microsoft Visual Studio .Net 2003 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: SmartHeap Library Version 8.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DQ965GF motherboard (Intel Core 2 Quad Q6600)

SPECint2006 = 18.2

SPECint\_base2006 = 16.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2007

Hardware Availability: Jan-2007

Software Availability: Aug-2006

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	565	17.3	565	17.3	<u>565</u>	<u>17.3</u>	<u>492</u>	<u>19.9</u>	492	19.8	491	19.9
401.bzip2	749	12.9	<u>748</u>	<u>12.9</u>	748	12.9	719	13.4	<u>720</u>	<u>13.4</u>	720	13.4
403.gcc	<u>731</u>	<u>11.0</u>	732	11.0	720	11.2	<u>466</u>	<u>17.3</u>	466	17.3	467	17.3
429.mcf	394	23.2	393	23.2	<u>393</u>	<u>23.2</u>	394	23.2	393	23.2	<u>393</u>	<u>23.2</u>
445.gobmk	654	16.0	<u>654</u>	<u>16.1</u>	653	16.1	592	17.7	<u>591</u>	<u>17.7</u>	591	17.7
456.hmmr	740	12.6	<u>740</u>	<u>12.6</u>	740	12.6	733	12.7	732	12.8	<u>732</u>	<u>12.7</u>
458.sjeng	<u>837</u>	<u>14.4</u>	838	14.4	837	14.5	747	16.2	747	16.2	<u>747</u>	<u>16.2</u>
462.libquantum	831	24.9	831	24.9	<u>831</u>	<u>24.9</u>	656	31.6	657	31.5	<u>657</u>	<u>31.6</u>
464.h264ref	<u>898</u>	<u>24.6</u>	898	24.6	898	24.6	845	26.2	844	26.2	<u>845</u>	<u>26.2</u>
471.omnetpp	433	14.4	433	14.4	<u>433</u>	<u>14.4</u>	388	16.1	<u>388</u>	<u>16.1</u>	388	16.1
473.astar	<u>569</u>	<u>12.3</u>	569	12.3	568	12.4	529	13.3	<u>529</u>	<u>13.3</u>	529	13.3
483.xalancbmk	353	19.5	<u>353</u>	<u>19.5</u>	354	19.5	351	19.7	<u>351</u>	<u>19.7</u>	351	19.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply  
Product description located as of 7/2007:

<http://www.intel.com/products/motherboard/DQ965GF/index.htm>

The system bus runs at 1066 MHz

System was configured with integrated graphics card

Binaries were built on Windows XP Professional SP2 with 4GB of RAM and /3GB boot switch

## Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

## Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
473.astar: -DSPEC_CPU_LITTLE_ENDIAN
```



# SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

**Intel Corporation**

Intel DQ965GF motherboard (Intel Core 2 Quad Q6600)

**SPECint2006 = 18.2**

**SPECint\_base2006 = 16.3**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Jun-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Aug-2006

## Base Optimization Flags

C benchmarks:

-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:

-fast -Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qprefetch /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

401.bzip2: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000  
shlw32m.lib -link /FORCE:MULTIPLE

403.gcc: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000  
-link /FORCE:MULTIPLE

429.mcf: basepeak = yes

445.gobmk: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -QxT -O2 -Qipo  
-Qprec\_div- -Qansi-alias /F512000000  
-link /FORCE:MULTIPLE

456.hmmer: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll2  
-Qansi-alias /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

458.sjeng: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll4  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

462.libquantum: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll4  
-Ob0 -Qprefetch -Qopt-streaming-stores:always /F512000000  
shlw32m.lib -link /FORCE:MULTIPLE

464.h264ref: Same as 456.hmmer

C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

**Intel Corporation**

Intel DQ965GF motherboard (Intel Core 2 Quad Q6600)

**SPECint2006 = 18.2**

**SPECint\_base2006 = 16.3**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Jun-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Aug-2006

## Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags-file-20070525.xml.20070809.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags-file-20070525.xml.20070809.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Sun Dec 16 05:53:15 2007 by SPEC CPU2006 PS/PDF formatter v5614.