



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c (AMD Opteron 2220)

**SPECint®2006 = 14.0**

**SPECint\_base2006 = 12.7**

CPU2006 license: 3


Test date: Jul-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

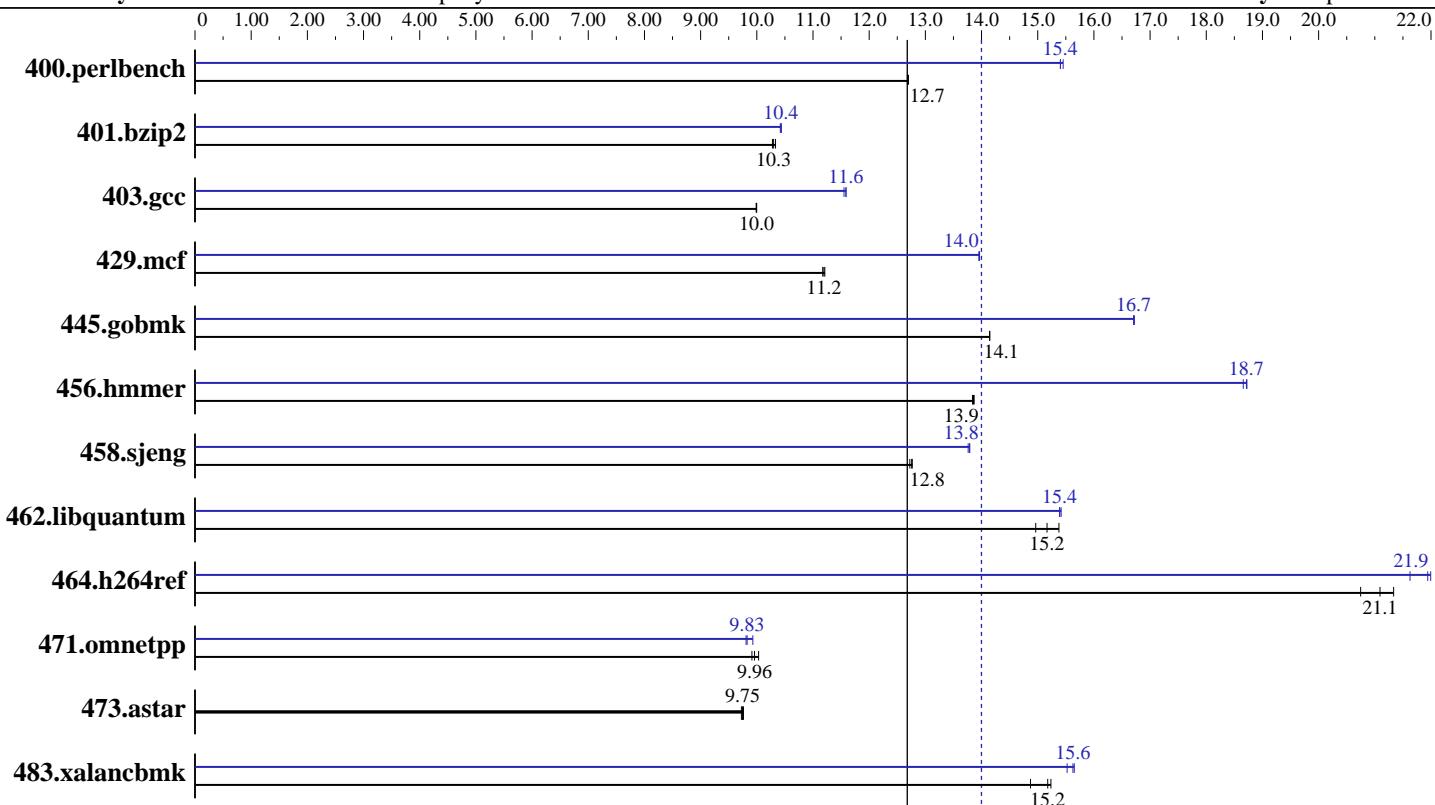

**SPECint\_base2006 = 12.7**

**SPECint2006 = 14.0**

## Hardware

CPU Name: AMD Opteron 2220  
 CPU Characteristics: 2.8 GHz, 1 MB L2 cache  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (4x4 GB, PC2-5300P CL5)  
 Disk Subsystem: 2x72 GB 10 K SAS  
 Other Hardware: None

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64)  
 kernel 2.6.16.21-0.8-smp  
 Compiler: QLogic PathScale Compiler Suite, Release 3.0  
 Auto Parallel: No  
 File System: ext2  
 System State: Multi-user, run level 3  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap Library 8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECint2006 = 14.0**

ProLiant BL465c (AMD Opteron 2220)

**SPECint\_base2006 = 12.7**

CPU2006 license: 3

Test date: Jul-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	769	12.7	<b>769</b>	<b>12.7</b>	771	12.7	634	15.4	632	15.5	<b>634</b>	<b>15.4</b>
401.bzip2	<b>937</b>	<b>10.3</b>	939	10.3	934	10.3	926	10.4	925	10.4	<b>925</b>	<b>10.4</b>
403.gcc	806	9.99	805	10.0	<b>805</b>	<b>10.0</b>	695	11.6	<b>695</b>	<b>11.6</b>	697	11.6
429.mcf	814	11.2	<b>815</b>	<b>11.2</b>	816	11.2	<b>653</b>	<b>14.0</b>	653	14.0	653	14.0
445.gobmk	741	14.1	742	14.1	<b>742</b>	<b>14.1</b>	627	16.7	<b>628</b>	<b>16.7</b>	628	16.7
456.hammer	674	13.8	<b>673</b>	<b>13.9</b>	673	13.9	500	18.7	<b>499</b>	<b>18.7</b>	498	18.7
458.sjeng	951	12.7	<b>949</b>	<b>12.8</b>	948	12.8	879	13.8	<b>878</b>	<b>13.8</b>	878	13.8
462.libquantum	<b>1366</b>	<b>15.2</b>	1385	15.0	1347	15.4	<b>1346</b>	<b>15.4</b>	1347	15.4	1344	15.4
464.h264ref	<b>1049</b>	<b>21.1</b>	1037	21.3	1067	20.7	1006	22.0	<b>1009</b>	<b>21.9</b>	1023	21.6
471.omnetpp	623	10.0	630	9.91	<b>628</b>	<b>9.96</b>	<b>636</b>	<b>9.83</b>	629	9.93	637	9.81
473.astar	719	9.76	<b>720</b>	<b>9.75</b>	722	9.73	719	9.76	<b>720</b>	<b>9.75</b>	722	9.73
483.xalancbmk	<b>455</b>	<b>15.2</b>	453	15.2	464	14.9	444	15.5	441	15.7	<b>442</b>	<b>15.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Node interleaving is disabled  
ulimit -s unlimited set

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECint2006 = 14.0**

ProLiant BL465c (AMD Opteron 2220)

**SPECint\_base2006 = 12.7**

**CPU2006 license:** 3

**Test date:** Jul-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2007

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1

C++ benchmarks:

-Ofast -m32 -L/cpu2006/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

-IPA:max\_jobs=4

C++ benchmarks:

-IPA:max\_jobs=4

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hammer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:opt=0

401.bzip2: -O3 -LNO:ou\_prod\_max=10 -OPT:Ofast -OPT:alias=disjoint

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECint2006 = 14.0**

ProLiant BL465c (AMD Opteron 2220)

**SPECint\_base2006 = 12.7**

CPU2006 license: 3

Test date: Jul-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2007

Tested by: Hewlett-Packard Company

Software Availability: Apr-2007

## Peak Optimization Flags (Continued)

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:Ofast

429.mcf: -m32 -O3 -ipa -L/cpu2006/SmartHeap\_8.1/lib -lsmartheap

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off  
-WOPT:retype\_expr=on

456.hmmr: -O2 -OPT:alias=disjoint -OPT:malloc\_alg=1 -CG:cflow=0

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=50000 -IPA:pu\_reorder=2

462.libquantum: -O3 -ipa -CG:local\_fwd\_sched=on -IPA:space=1000

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

C++ benchmarks:

471.omnetpp: -Ofast -CG:gcm=off -m32  
-L/cpu2006/SmartHeap\_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -Ofast -m32 -OPT:unroll\_times\_max=8  
-L/cpu2006/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=4

C++ benchmarks:

-IPA:max\_jobs=4

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.15.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.15.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.15.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.15.xml)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECint2006 = 14.0**

ProLiant BL465c (AMD Opteron 2220)

**SPECint\_base2006 = 12.7**

**CPU2006 license:** 3

**Test date:** Jul-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jan-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 12:26:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 August 2007.