SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUS Computer International

(Test Sponsor: Intel Corporation)

Asus G2S (Intel Core 2 Duo T7700)

SPECint®2006 = 17.3

SPECint_base2006 = 15.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2007
Hardware Availability: Jun-2007
Software Availability: May-2007

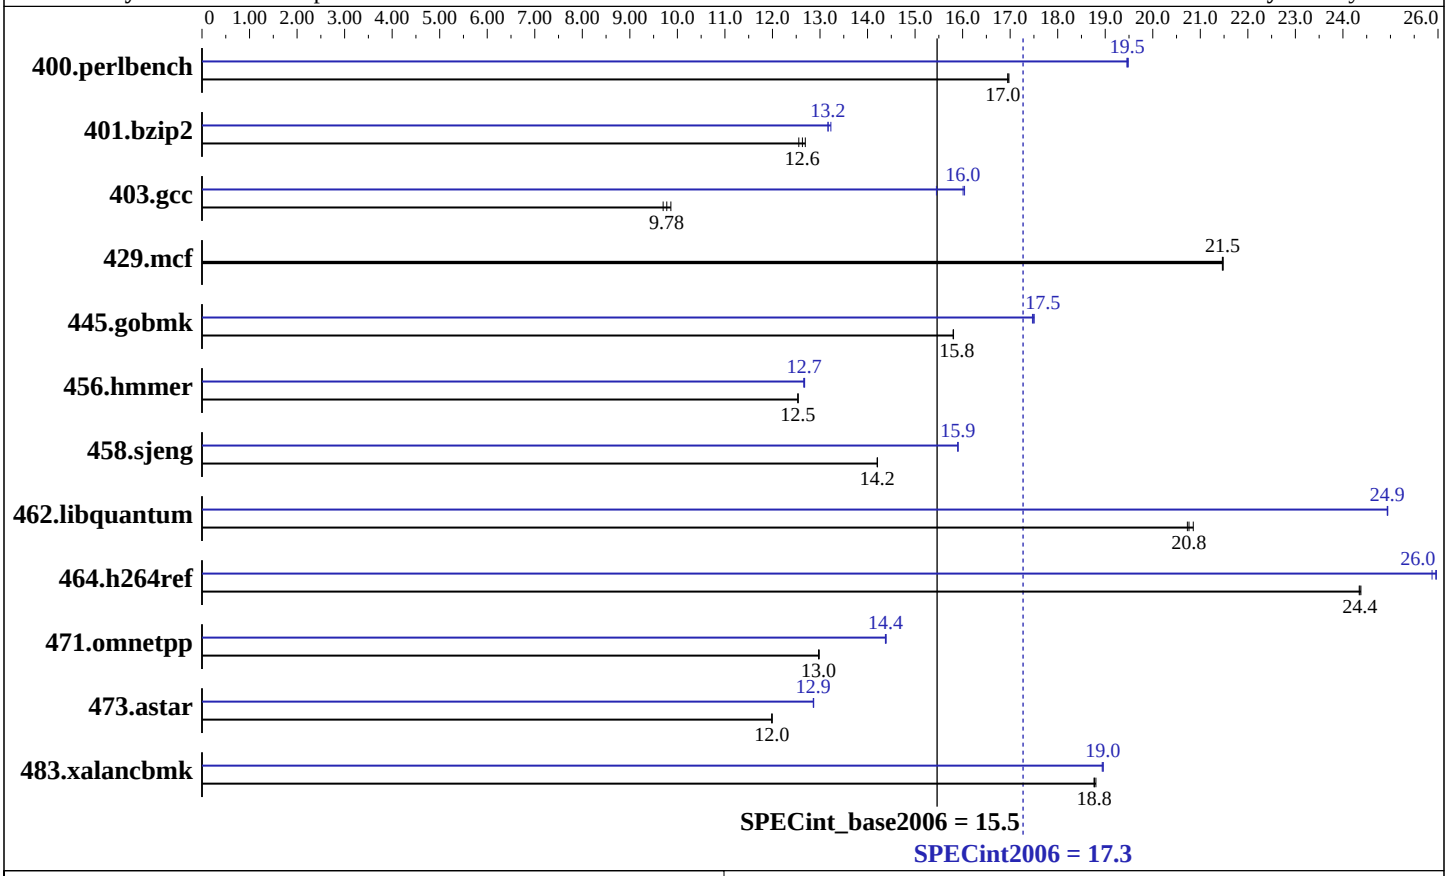

Hardware

CPU Name:	Intel Core 2 Duo T7700
CPU Characteristics:	2.40 GHz, 4MB L2, 800 MHz Bus
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2x1GB Hynix DDR2-667 CL5)
Disk Subsystem:	160GB Hitachi SATA, 5400RPM
Other Hardware:	None

Software

Operating System:	Windows Vista32 Ultimate
Compiler:	Intel C++ Compiler for IA32 version 10.0 Build 20070426 Package ID: W_CC_P_10.0.025 Microsoft Visual Studio .Net 2003 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None SmartHeap Library Version 8.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUS Computer International
(Test Sponsor: Intel Corporation)

Asus G2S (Intel Core 2 Duo T7700)

SPECint2006 = 17.3

SPECint_base2006 = 15.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2007
Hardware Availability: Jun-2007
Software Availability: May-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**576**	**17.0**	576	17.0	576	16.9	502	19.5	501	19.5	**502**	**19.5**
401.bzip2	760	12.7	**764**	**12.6**	769	12.6	733	13.2	**733**	**13.2**	729	13.2
403.gcc	**823**	**9.78**	816	9.86	830	9.70	521	15.4	**503**	**16.0**	502	16.0
429.mcf	425	21.5	**425**	**21.5**	425	21.5	425	21.5	**425**	**21.5**	425	21.5
445.gobmk	664	15.8	664	15.8	**664**	**15.8**	600	17.5	599	17.5	**600**	**17.5**
456.hmmer	744	12.5	744	12.5	**744**	**12.5**	736	12.7	**736**	**12.7**	737	12.7
458.sjeng	852	14.2	852	14.2	**852**	**14.2**	**761**	**15.9**	761	15.9	761	15.9
462.libquantum	**998**	**20.8**	994	20.9	1000	20.7	**831**	**24.9**	831	24.9	831	24.9
464.h264ref	909	24.3	**909**	**24.4**	908	24.4	855	25.9	**853**	**26.0**	852	26.0
471.omnetpp	481	13.0	**482**	**13.0**	482	13.0	**435**	**14.4**	434	14.4	435	14.4
473.astar	586	12.0	**586**	**12.0**	585	12.0	546	12.9	546	12.9	**546**	**12.9**
483.xalancbmk	368	18.8	367	18.8	**368**	**18.8**	364	18.9	**364**	**19.0**	364	19.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
The system bus runs at 667 MHz
System was configured with an nVIDIA 8600M GT graphics card
Binaries were built on Windows XP Professional SP2
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:

```
-fast /F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib
                -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:
```
icl -Qvc7.1
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qprefetch /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

401.bzip2: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

403.gcc: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast /F512000000 -link /FORCE:MULTIPLE`

429.mcf: `basepeak = yes`

445.gobmk: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-QxT -O2 -Qipo -Qprec_div- -Qansi-alias /F512000000 -link /FORCE:MULTIPLE`

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qunroll2 -Qansi-alias /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

458.sjeng: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qunroll4 /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

462.libquantum: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qunroll4 -Ob0 -Qprefetch -Qopt-streaming-stores:always /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

464.h264ref: `Same as 456.hmmer`

C++ benchmarks:
`-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.18.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.18.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:17:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 August 2007.