SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon 5120)

SPECint®_rate2006 = 41.5

SPECint_rate_base2006 = 38.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2007
Hardware Availability: Jul-2006
Software Availability: Jul-2007

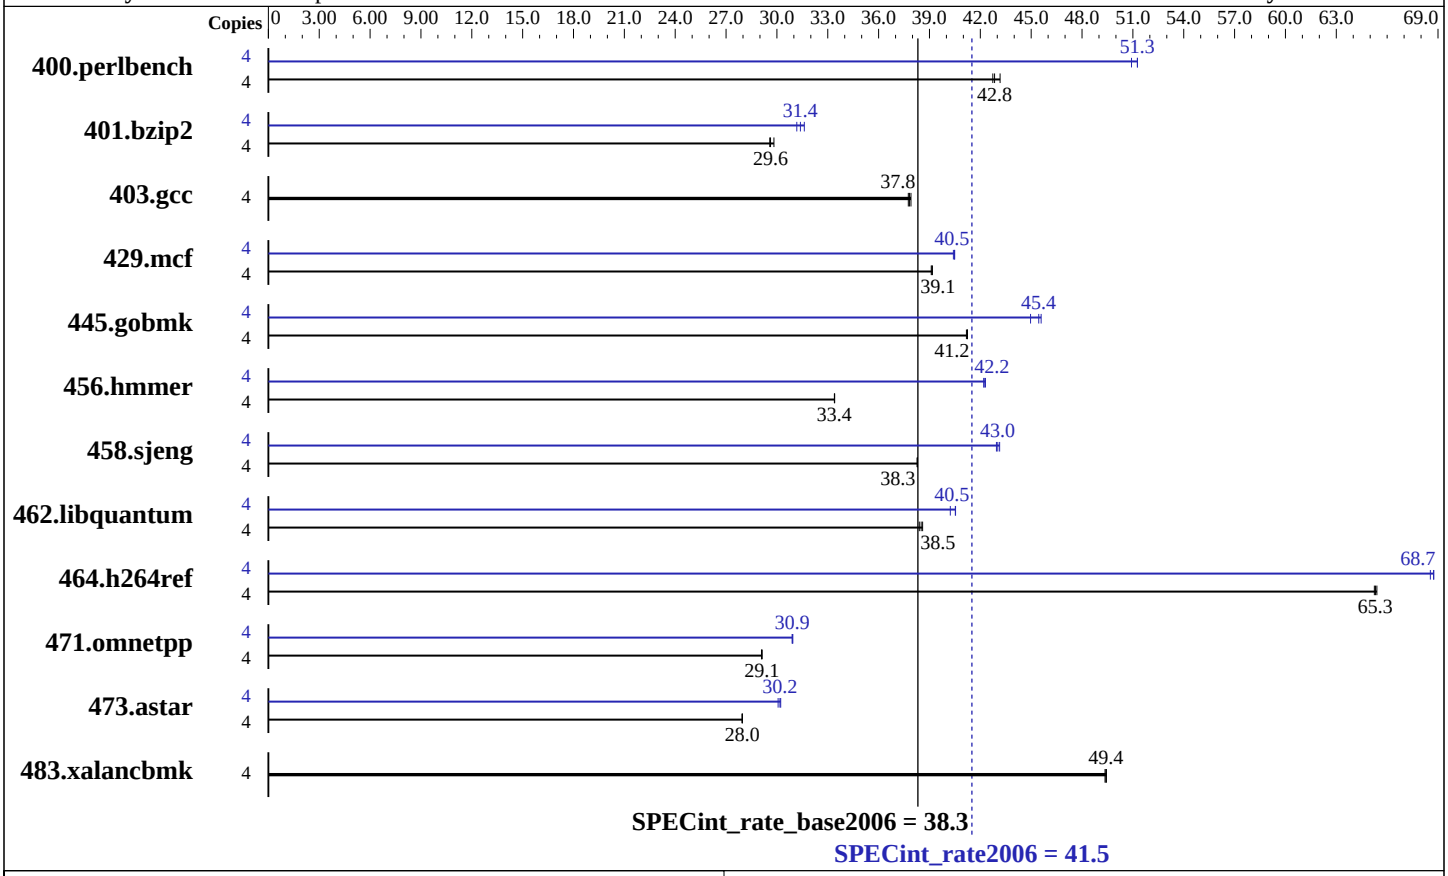

Hardware

CPU Name:	Intel Xeon 5120
CPU Characteristics:	1066MHz system bus
CPU MHz:	1866
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2GB DDR2-5300F ECC)
Disk Subsystem:	1 x 36 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for Linux version 10.0 Build 20070426 Package ID: l_cc_p_10.0.023
Auto Parallel:	No
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon 5120)

SPECint_rate2006 = 41.5

SPECint_rate_base2006 = 38.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2007
Hardware Availability: Jul-2006
Software Availability: Jul-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	914	42.7	905	43.2	**912**	**42.8**	4	**762**	**51.3**	767	50.9	762	51.3
401.bzip2	4	1294	29.8	1305	29.6	**1303**	**29.6**	4	**1230**	**31.4**	1238	31.2	1221	31.6
403.gcc	4	853	37.8	849	37.9	**851**	**37.8**	4	853	37.8	849	37.9	**851**	**37.8**
429.mcf	4	**932**	**39.1**	933	39.1	931	39.2	4	**901**	**40.5**	901	40.5	903	40.4
445.gobmk	4	1019	41.2	1017	41.2	**1018**	**41.2**	4	933	45.0	**923**	**45.4**	920	45.6
456.hmmer	4	1118	33.4	**1117**	**33.4**	1117	33.4	4	882	42.3	884	42.2	**884**	**42.2**
458.sjeng	4	1265	38.3	1264	38.3	**1264**	**38.3**	4	1122	43.1	1127	43.0	**1125**	**43.0**
462.libquantum	4	**2152**	**38.5**	2147	38.6	2158	38.4	4	2060	40.2	**2045**	**40.5**	2044	40.5
464.h264ref	4	1357	65.2	1354	65.4	**1355**	**65.3**	4	1288	68.7	1291	68.5	**1288**	**68.7**
471.omnetpp	4	859	29.1	858	29.1	**859**	**29.1**	4	**809**	**30.9**	808	30.9	809	30.9
473.astar	4	1005	27.9	1004	28.0	**1005**	**28.0**	4	**930**	**30.2**	934	30.1	929	30.2
483.xalancbmk	4	**559**	**49.4**	558	49.4	559	49.4	4	**559**	**49.4**	558	49.4	559	49.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs -L/spec/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/cce/10.0.023/bin/icc -L/opt/intel/cce/10.0.023/lib -I/opt/intel/cce/10.0.023/include`

456.hmmer: `/opt/intel/cce/10.0.023/bin/icc -L/opt/intel/cce/10.0.023/lib -I/opt/intel/cce/10.0.023/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec_div -ansi-alias

456.hmmer: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec_div -ansi-alias -Wl,-z,muldefs -L/spec/cpu2006.1.0/lib -lsmartheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.45.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.45.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3550 (Intel Xeon 5120)

SPECint_rate2006 = 41.5

SPECint_rate_base2006 = 38.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2007
Hardware Availability: Jul-2006
Software Availability: Jul-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:05:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 September 2007.