



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860
(Intel Xeon processor E5320,1.86GHz)

SPECfp[®]_rate2006 = 44.9

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jul-2007

Hardware Availability: Mar-2007

Software Availability: May-2007

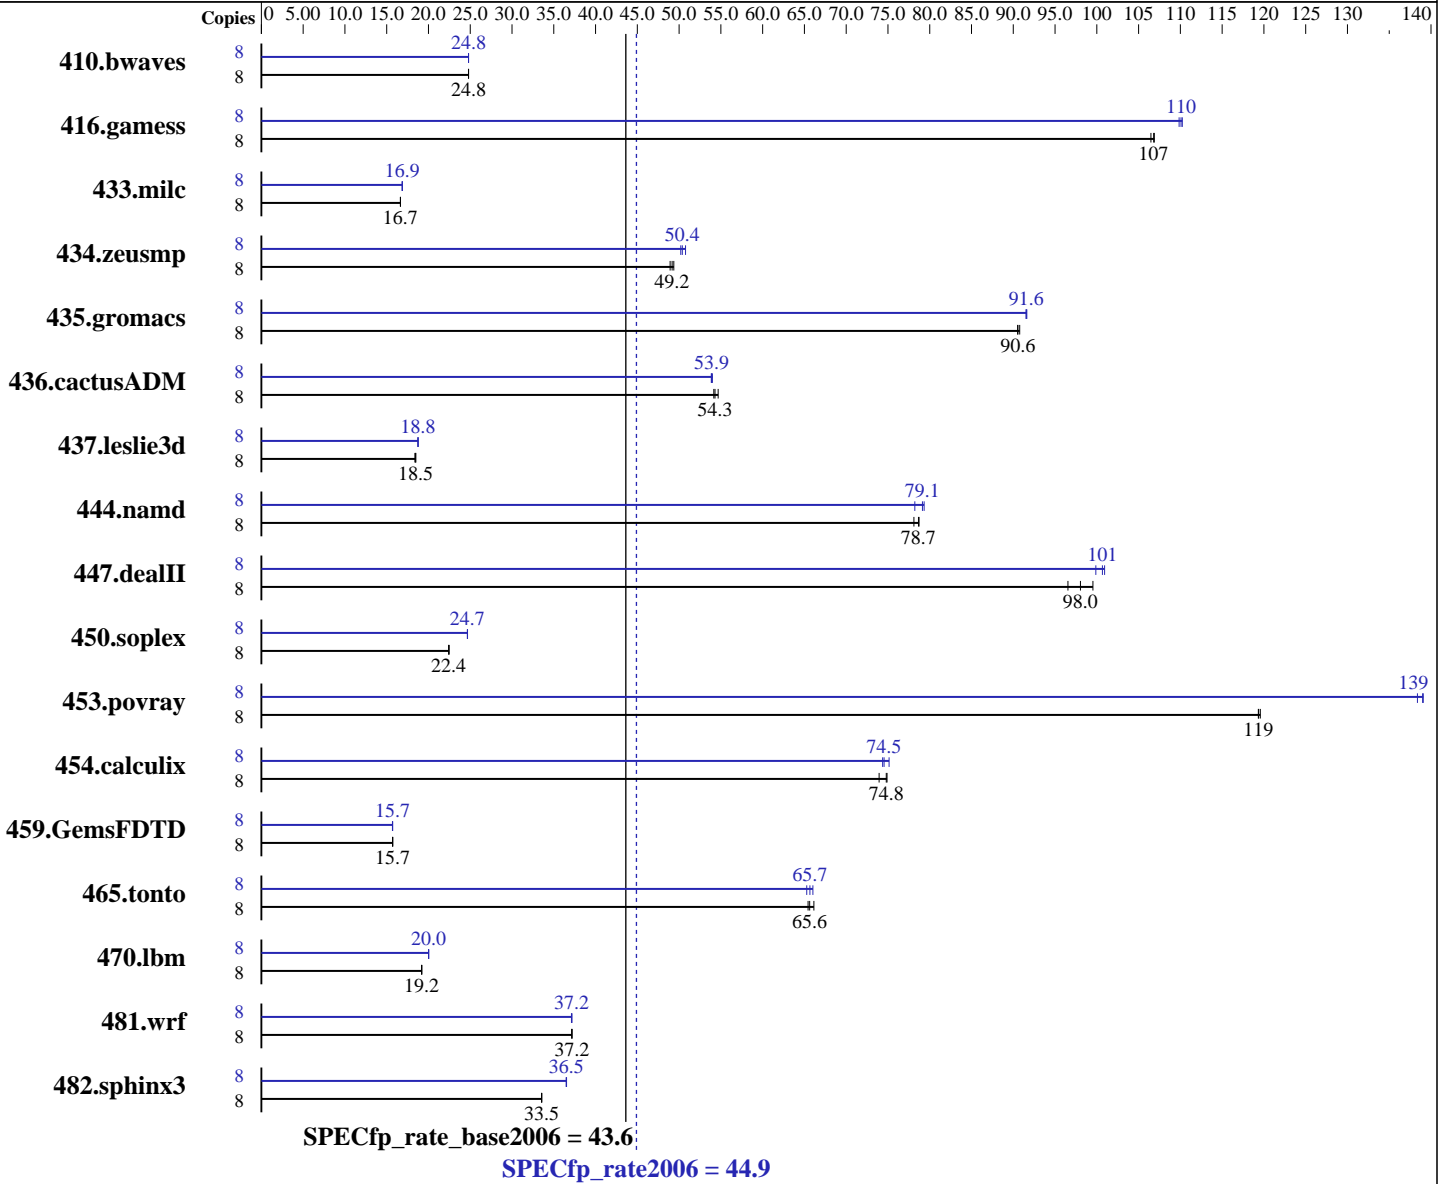

Hardware

CPU Name: Intel Xeon E5320
 CPU Characteristics: 1.86 GHz, 8 MB L2, 1066 MHz system bus
 CPU MHz: 1860
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1 to 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE LINUX Enterprise Server 10
 Kernel 2.6.16.21-0.8-smp for x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application version 10.0
 Build 20070426 Package ID: l_cc_p_10.0.023
 Intel Fortran Compiler for IA32/EM64T application version 10.0
 Build 20070426 Package ID: l_fc_p_10.0.023
 Auto Parallel: No
 File System: ext2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860
(Intel Xeon processor E5320,1.86GHz)

SPECfp_rate2006 = 44.9

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jul-2007

Hardware Availability: Mar-2007

Software Availability: May-2007

L3 Cache: None
Other Cache: None
Memory: 12 GB (12x1 GB) FB-DIMM PC2-4200F ECC CL4
Disk Subsystem: 1x147 GB SAS, 15000 RPM
Other Hardware: None

System State: Multi-user run level 3
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	4386	24.8	4384	24.8	4385	24.8	8	4385	24.8	4384	24.8	4385	24.8
416.gamess	8	1467	107	1466	107	1471	106	8	1426	110	1423	110	1421	110
433.milc	8	4415	16.6	4410	16.7	4410	16.7	8	4355	16.9	4355	16.9	4354	16.9
434.zeusmp	8	1481	49.2	1475	49.4	1488	48.9	8	1445	50.4	1434	50.8	1450	50.2
435.gromacs	8	631	90.6	629	90.8	631	90.5	8	624	91.6	624	91.5	623	91.6
436.cactusADM	8	1761	54.3	1765	54.2	1749	54.7	8	1774	53.9	1775	53.9	1771	54.0
437.leslie3d	8	4070	18.5	4072	18.5	4092	18.4	8	4008	18.8	4014	18.7	4010	18.8
444.namd	8	815	78.7	816	78.7	821	78.1	8	809	79.3	811	79.1	820	78.2
447.dealII	8	919	99.5	933	98.0	948	96.5	8	907	101	916	99.9	909	101
450.soplex	8	2976	22.4	2974	22.4	2970	22.5	8	2704	24.7	2705	24.7	2706	24.7
453.povray	8	357	119	357	119	356	120	8	308	138	306	139	306	139
454.calculix	8	893	73.9	882	74.8	881	74.9	8	878	75.1	885	74.5	888	74.4
459.GemsFDTD	8	5398	15.7	5404	15.7	5404	15.7	8	5402	15.7	5410	15.7	5405	15.7
465.tonto	8	1190	66.1	1203	65.4	1199	65.6	8	1206	65.3	1192	66.0	1199	65.7
470.lbm	8	5728	19.2	5728	19.2	5728	19.2	8	5491	20.0	5490	20.0	5491	20.0
481.wrf	8	2404	37.2	2404	37.2	2405	37.2	8	2405	37.2	2408	37.1	2405	37.2
482.sphinx3	8	4649	33.5	4646	33.6	4648	33.5	8	4271	36.5	4268	36.5	4273	36.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

All binaries were built with 64-bit Intel compiler except:
437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860
(Intel Xeon processor E5320,1.86GHz)

SPECfp_rate2006 = 44.9

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jul-2007
Hardware Availability: Mar-2007
Software Availability: May-2007

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860
(Intel Xeon processor E5320,1.86GHz)

SPECfp_rate2006 = 44.9

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jul-2007
Hardware Availability: Mar-2007
Software Availability: May-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.0.023/bin/icc -L/opt/intel/cc/10.0.023/lib  
-I/opt/intel/cc/10.0.023/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.0.023/bin/icpc -L/opt/intel/cc/10.0.023/lib  
-I/opt/intel/cc/10.0.023/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.0.023/bin/ifort -L/opt/intel/fc/10.0.023/lib  
-I/opt/intel/fc/10.0.023/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -prof_gen(pass 1) -prof_use(pass 2) -fast -fno-alias

470.lbm: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-scalar-rep- -prefetch

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof_gen(pass 1) -prof_use(pass 2) -fast -fno-alias
-auto_ilp32

447.dealII: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof_gen(pass 1) -prof_use(pass 2) -fast -xT -ipo -O3
-no-prec-div

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860
(Intel Xeon processor E5320,1.86GHz)

SPECfp_rate2006 = 44.9

SPECfp_rate_base2006 = 43.6

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jul-2007
Hardware Availability: Mar-2007
Software Availability: May-2007

Peak Optimization Flags (Continued)

453.povray: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast

416.gamess: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof_gen(pass 1) -prof_use(pass 2) -fast

437.leslie3d: Same as 434.zeusmp

459.GemsFDTD: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2 -Ob0

465.tonto: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

436.cactusADM: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll2
-auto_ilp32

454.calculix: -fast -auto_ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.20090714.00.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/EM64T_Intel100_flags.20090714.00.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:47:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 October 2007.