



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

### SPECfp<sup>®</sup>\_rate2006 = 69.4

### CELSIUS R650, Intel Xeon E5410 processor

### SPECfp\_rate\_base2006 = 62.6

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

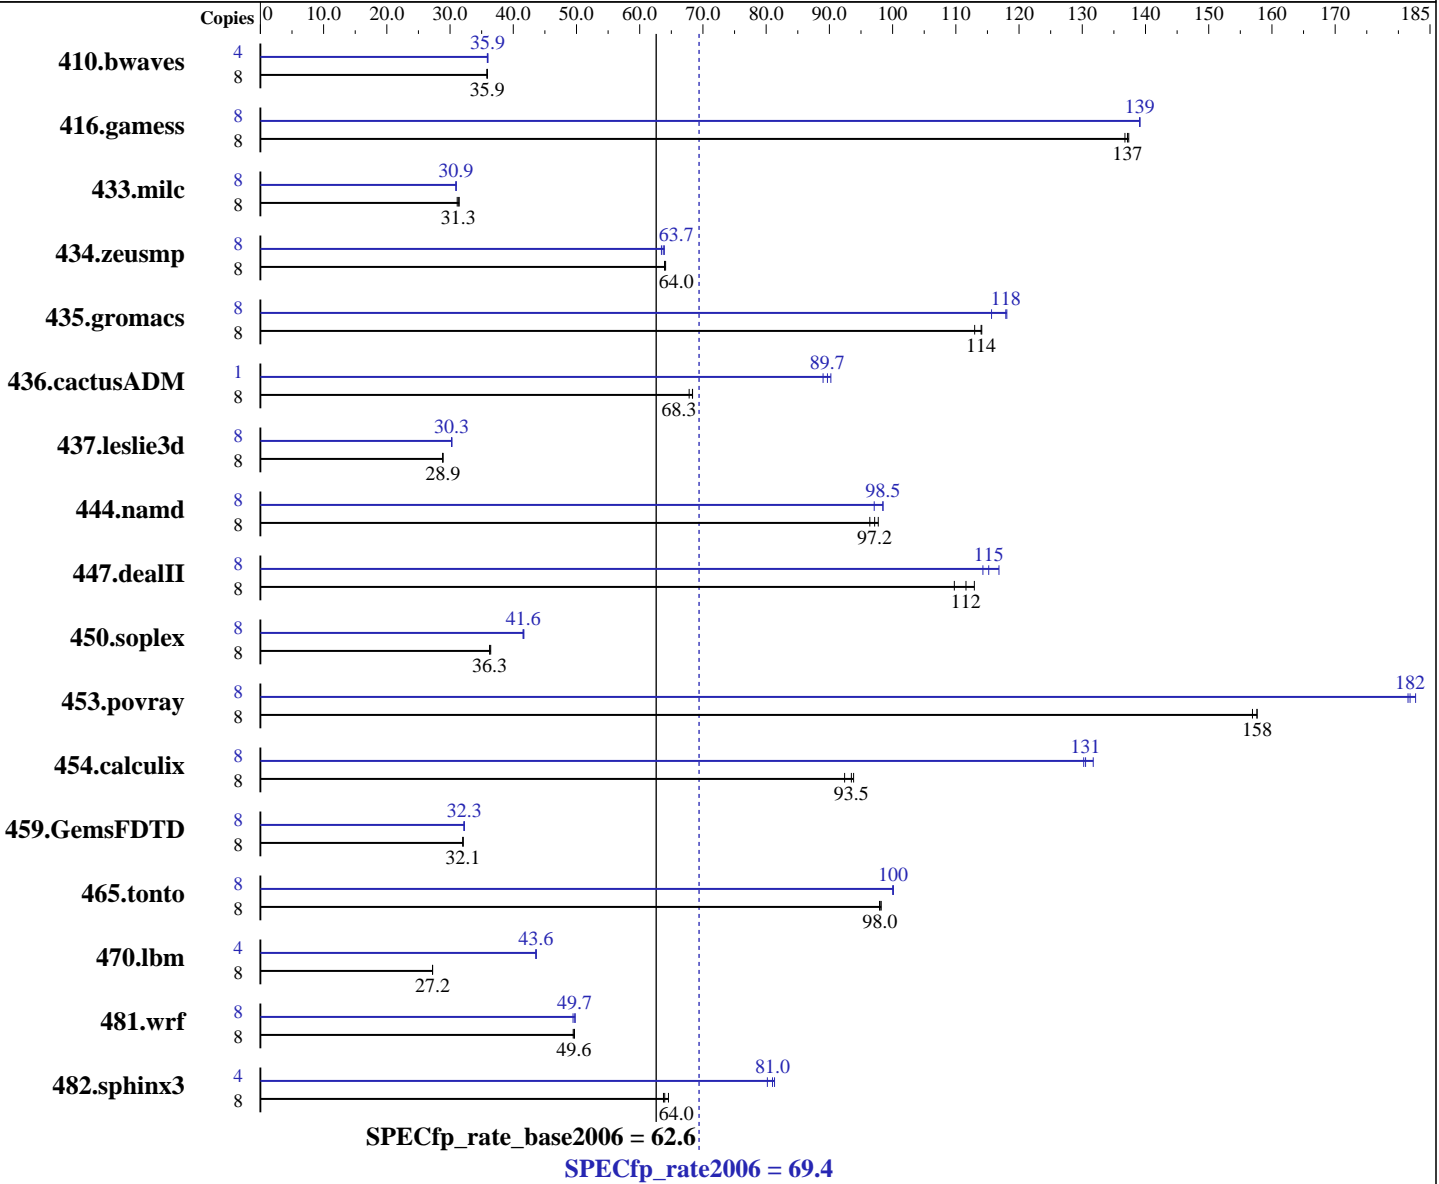

#### Hardware

CPU Name: Intel Xeon E5410  
 CPU Characteristics: 2333  
 CPU MHz: 2333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

#### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Multi-User, Run Level 3  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECfp\_rate2006 = 69.4

## CELSIUS R650, Intel Xeon E5410 processor

SPECfp\_rate\_base2006 = 62.6

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 1x SATA II, 400 GB, 7200 rpm  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b>3031</b>	<b>35.9</b>	3034	35.8	3028	35.9	4	1514	35.9	<b>1512</b>	<b>35.9</b>	1510	36.0
416.gamess	8	1140	137	1145	137	<b>1142</b>	<b>137</b>	8	1126	139	1126	139	<b>1126</b>	<b>139</b>
433.milc	8	2335	31.5	<b>2346</b>	<b>31.3</b>	2359	31.1	8	2374	30.9	2371	31.0	<b>2373</b>	<b>30.9</b>
434.zeusmp	8	1136	64.1	1139	63.9	<b>1138</b>	<b>64.0</b>	8	1148	63.4	<b>1142</b>	<b>63.7</b>	1139	63.9
435.gromacs	8	506	113	<b>501</b>	<b>114</b>	501	114	8	484	118	494	116	<b>484</b>	<b>118</b>
436.cactusADM	8	1410	67.8	1399	68.4	<b>1399</b>	<b>68.3</b>	1	<b>133</b>	<b>89.7</b>	134	89.0	132	90.2
437.leslie3d	8	2607	28.8	<b>2606</b>	<b>28.9</b>	2604	28.9	8	<b>2485</b>	<b>30.3</b>	2487	30.2	2483	30.3
444.namd	8	<b>660</b>	<b>97.2</b>	666	96.4	656	97.7	8	661	97.1	<b>652</b>	<b>98.5</b>	651	98.5
447.dealII	8	<b>820</b>	<b>112</b>	810	113	834	110	8	783	117	<b>794</b>	<b>115</b>	801	114
450.soplex	8	1831	36.4	<b>1839</b>	<b>36.3</b>	1839	36.3	8	1605	41.6	1601	41.7	<b>1604</b>	<b>41.6</b>
453.povray	8	271	157	<b>270</b>	<b>158</b>	270	158	8	<b>234</b>	<b>182</b>	233	183	234	182
454.calculix	8	703	93.8	714	92.4	<b>706</b>	<b>93.5</b>	8	507	130	<b>506</b>	<b>131</b>	501	132
459.GemsFDTD	8	<b>2648</b>	<b>32.1</b>	2651	32.0	2647	32.1	8	2637	32.2	2632	32.3	<b>2632</b>	<b>32.3</b>
465.tonto	8	<b>803</b>	<b>98.0</b>	802	98.2	804	97.9	8	786	100	<b>786</b>	<b>100</b>	787	100
470.lbm	8	4037	27.2	<b>4036</b>	<b>27.2</b>	4036	27.2	4	1259	43.6	1261	43.6	<b>1261</b>	<b>43.6</b>
481.wrf	8	1799	49.7	<b>1801</b>	<b>49.6</b>	1806	49.5	8	1795	49.8	<b>1797</b>	<b>49.7</b>	1807	49.5
482.sphinx3	8	2416	64.5	<b>2438</b>	<b>64.0</b>	2446	63.8	4	972	80.2	<b>962</b>	<b>81.0</b>	959	81.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

### Platform Notes

BIOS configuration:  
Enhanced Speedstep Technology = Disable  
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable  
SnoopFilter = Enable



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 69.4

CELSIUS R650, Intel Xeon E5410 processor

SPECfp\_rate\_base2006 = 62.6

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

## General Notes

All binaries were built with 64-bit Intel compiler except:  
437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with  
32-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers in your country please see:  
<http://www.fujitsu-siemens.com/countries>

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 69.4

CELSIUS R650, Intel Xeon E5410 processor

SPECfp\_rate\_base2006 = 62.6

CPU2006 license: 22

Test date: Nov-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 69.4

CELSIUS R650, Intel Xeon E5410 processor

SPECfp\_rate\_base2006 = 62.6

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

## Peak Portability Flags (Continued)

453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 69.4

CELSIUS R650, Intel Xeon E5410 processor

SPECfp\_rate\_base2006 = 62.6

CPU2006 license: 22

Test date: Nov-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090714.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090714.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Mar 20 17:25:08 2012 by SPEC CPU2006 PS/PDF formatter v6524.