



SPEC® CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp®2006 = 19.1

CELSIUS M460, Intel Core 2 Quad Q6700 processor

SPECfp_base2006 = 17.8

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

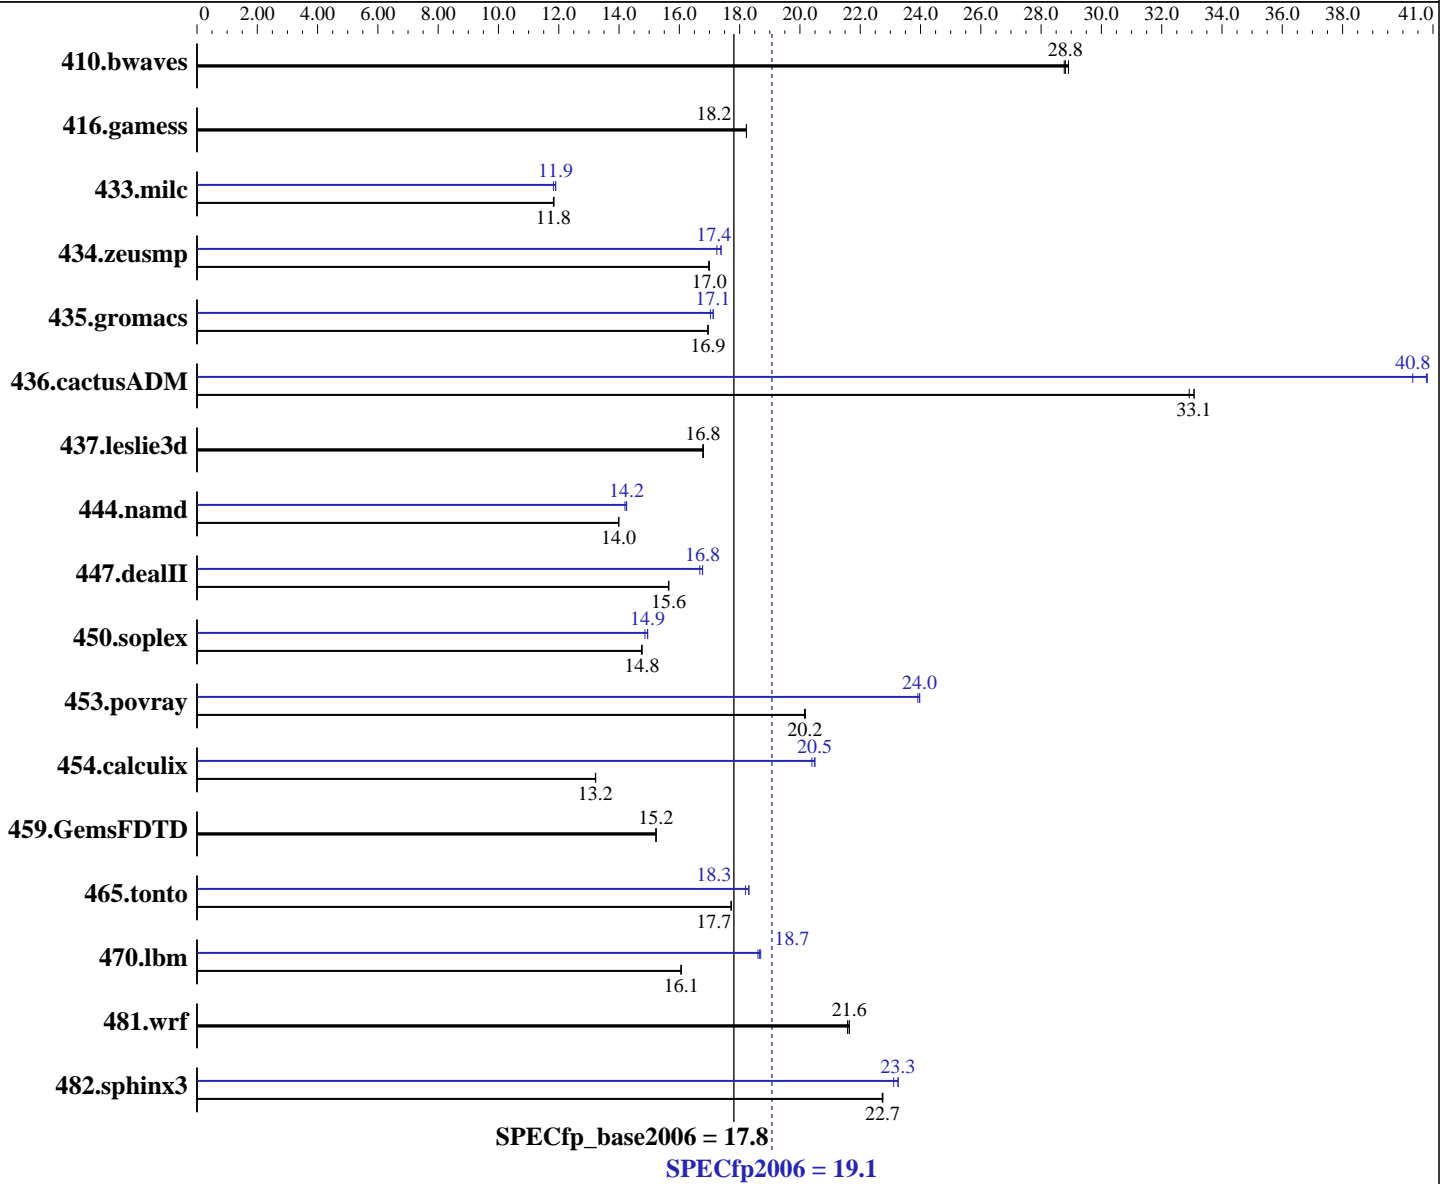

Hardware

CPU Name: Intel Core 2 Quad Q6700
 CPU Characteristics:
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: Microsoft Windows Vista Ultimate (x64)
 Compiler: Intel C++ and Fortran Compilers for Intel64, Version 10.1, Build 20070913
 Microsoft Visual Studio 2005 with SP1 (for libraries)
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = **19.1**

CELSIUS M460, Intel Core 2 Quad Q6700 processor

SPECfp_base2006 = **17.8**

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Hardware (Continued)

L3 Cache: None
 Other Cache: None
 Memory: 4 GB (4x1 GB PC2-6400 CL6 SDRAM)
 Disk Subsystem: 1 x 400 GB SATA II 7200 RPM
 Other Hardware: None

Software (Continued)

System State: Default
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: MicroQuill SmartHeap Library, Version 8.0 (64 bit)

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	470	28.9	472	28.8	472	28.8	470	28.9	472	28.8	472	28.8
416.gamess	1074	18.2	1074	18.2	1074	18.2	1074	18.2	1074	18.2	1074	18.2
433.milc	775	11.8	776	11.8	776	11.8	772	11.9	772	11.9	776	11.8
434.zeusmp	536	17.0	536	17.0	536	17.0	524	17.4	523	17.4	528	17.2
435.gromacs	421	16.9	421	16.9	421	17.0	417	17.1	417	17.1	419	17.0
436.cactusADM	363	32.9	361	33.1	361	33.1	293	40.8	293	40.8	296	40.3
437.leslie3d	560	16.8	560	16.8	560	16.8	560	16.8	560	16.8	560	16.8
444.namd	573	14.0	573	14.0	573	14.0	563	14.3	563	14.2	565	14.2
447.dealII	731	15.6	731	15.6	731	15.7	682	16.8	682	16.8	686	16.7
450.soplex	565	14.8	566	14.7	565	14.8	558	15.0	558	14.9	561	14.9
453.povray	264	20.2	264	20.2	264	20.2	222	24.0	222	24.0	223	23.9
454.calculix	624	13.2	624	13.2	624	13.2	403	20.5	402	20.5	404	20.4
459.GemsFDTD	697	15.2	697	15.2	697	15.2	697	15.2	697	15.2	697	15.2
465.tonto	555	17.7	555	17.7	555	17.7	538	18.3	537	18.3	541	18.2
470.lbm	855	16.1	855	16.1	856	16.0	736	18.7	735	18.7	738	18.6
481.wrf	518	21.6	516	21.6	516	21.6	518	21.6	516	21.6	516	21.6
482.sphinx3	857	22.8	857	22.7	858	22.7	838	23.3	843	23.1	838	23.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

OMP_NUM_THREADS set to number of cores (default).

Platform Notes

BIOS default settings have been used.

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 19.1

CELSIUS M460, Intel Core 2 Quad Q6700 processor

SPECfp_base2006 = 17.8

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

C++ benchmarks:

icl -Qvc8

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc8 -Qc99 ifort

Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-fast -Qparallel -F1000000000 libguide40.lib

C++ benchmarks:

-fast -Qparallel -Qcxx-features -F1000000000 libguide40.lib
shlw64M.lib -link -FORCE:MULTIPLE

Fortran benchmarks:

-fast -Qparallel -F1000000000 libguide40.lib

Benchmarks using both Fortran and C:

-fast -Qparallel -F1000000000 libguide40.lib



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 19.1

CELSIUS M460, Intel Core 2 Quad Q6700 processor

SPECfp_base2006 = 17.8

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

433.milc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F1000000000 libguide40.lib

470.lbm: -fast -Qunroll2 -Qscalar-rep- -Qprefetch -F1000000000 libguide40.lib

482.sphinx3: -fast -Qunroll2 -F1000000000 libguide40.lib

C++ benchmarks:

444.namd: -fast -Qcxx-features -Oa -F1000000000 libguide40.lib sh1W64M.lib -link -FORCE:MULTIPLE

447.dealII: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features -F1000000000 libguide40.lib sh1W64M.lib -link -FORCE:MULTIPLE

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -O2 -Qunroll10 -QxT -Qscalar-rep- -Qprec-div- -F1000000000 libguide40.lib

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -fast -Qunroll14 -Qauto -F1000000000 libguide40.lib

Benchmarks using both Fortran and C:

435.gromacs: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F1000000000 libguide40.lib

436.cactusADM: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qparallel -Qprefetch -Qunroll2 -F1000000000 libguide40.lib

454.calculix: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll-aggressive -F1000000000 libguide40.lib

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 19.1

CELSIUS M460, Intel Core 2 Quad Q6700 processor

SPECfp_base2006 = 17.8

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.02.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.02.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 14 10:50:16 2009 by SPEC CPU2006 PS/PDF formatter v6323.