



SPEC® CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp®_rate2006 = 75.7

CELSIUS R650, Intel Xeon E5440 processor

SPECfp_rate_base2006 = 67.7

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

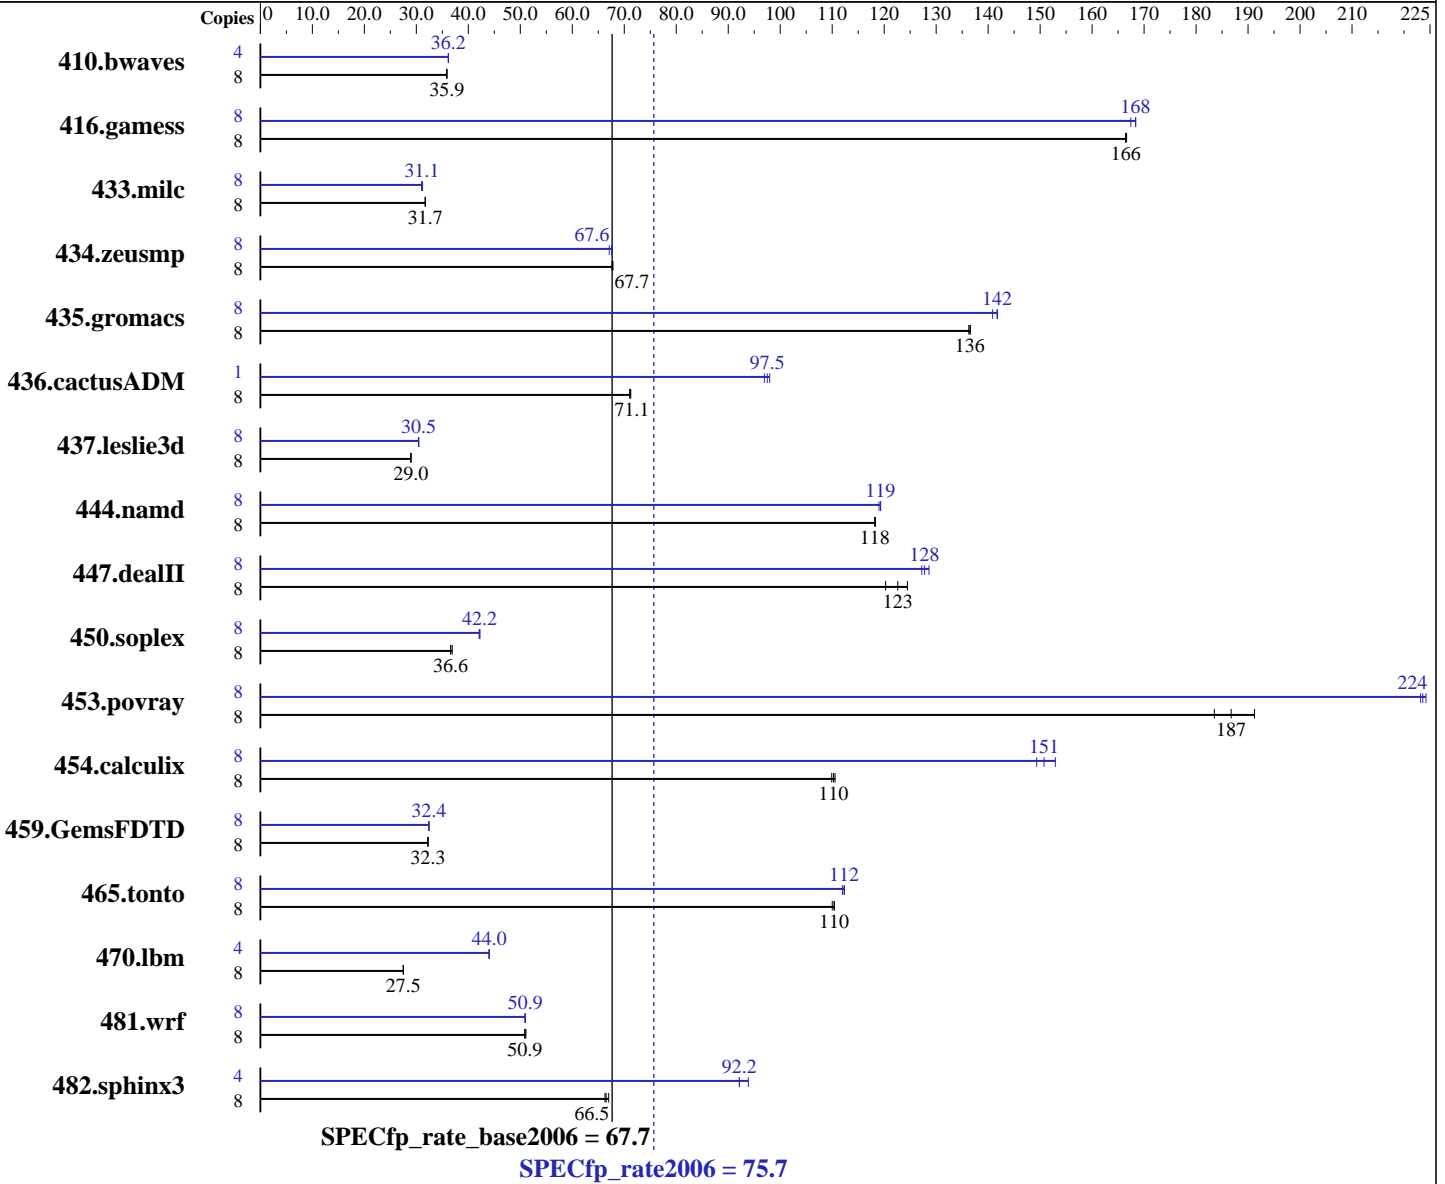

Hardware

CPU Name: Intel Xeon E5440
 CPU Characteristics: 2833
 CPU MHz: 2833
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User, Run Level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = **75.7**

CELSIUS R650, Intel Xeon E5440 processor

SPECfp_rate_base2006 = **67.7**

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Hardware (Continued)

L3 Cache: None
Other Cache: None
Memory: 8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1 x 400 GB SATA II 7200 RPM
Other Hardware: None

Software (Continued)

Peak Pointers: 32/64-bit
Other Software: binutils-2.17.50.0.5-0.1.x86_64

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	3032	35.9	3030	35.9	3031	35.9	4	1503	36.2	1503	36.2	1503	36.2		
416.gamess	8	941	166	940	167	941	166	8	935	167	930	168	930	168		
433.milc	8	2315	31.7	2312	31.8	2317	31.7	8	2368	31.0	2354	31.2	2362	31.1		
434.zeusmp	8	1076	67.7	1075	67.7	1073	67.8	8	1077	67.6	1077	67.6	1085	67.1		
435.gromacs	8	418	137	419	136	418	136	8	403	142	403	142	406	141		
436.cactusADM	8	1342	71.3	1346	71.0	1345	71.1	1	123	97.5	123	97.0	122	98.0		
437.leslie3d	8	2597	29.0	2599	28.9	2594	29.0	8	2468	30.5	2469	30.5	2473	30.4		
444.namd	8	543	118	542	118	543	118	8	538	119	538	119	539	119		
447.dealII	8	746	123	761	120	735	124	8	719	127	716	128	712	129		
450.soplex	8	1808	36.9	1824	36.6	1821	36.6	8	1585	42.1	1582	42.2	1579	42.2		
453.povray	8	228	187	232	184	223	191	8	190	224	191	223	190	224		
454.calculix	8	599	110	600	110	597	111	8	432	153	442	149	438	151		
459.GemsFDTD	8	2637	32.2	2631	32.3	2630	32.3	8	2618	32.4	2616	32.4	2620	32.4		
465.tonto	8	716	110	713	110	713	110	8	701	112	701	112	703	112		
470.lbm	8	3998	27.5	3997	27.5	3997	27.5	4	1248	44.0	1250	44.0	1248	44.0		
481.wrf	8	1755	50.9	1757	50.9	1749	51.1	8	1754	50.9	1756	50.9	1752	51.0		
482.sphinx3	8	2344	66.5	2352	66.3	2327	67.0	4	846	92.1	831	93.9	846	92.2		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default).

Platform Notes

BIOS configuration:
Enhanced Speedstep Technology = Disable
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable
SnoopFilter = Enable



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 75.7

CELSIUS R650, Intel Xeon E5440 processor

SPECfp_rate_base2006 = 67.7

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

General Notes

All binaries were built with 64-bit Intel compiler except: 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with 32-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 75.7

CELSIUS R650, Intel Xeon E5440 processor

SPECfp_rate_base2006 = 67.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 75.7

CELSIUS R650, Intel Xeon E5440 processor

SPECfp_rate_base2006 = 67.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 75.7

CELSIUS R650, Intel Xeon E5440 processor

SPECfp_rate_base2006 = 67.7

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20080124.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20080124.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Thu Jan 29 11:19:01 2009 by SPEC CPU2006 PS/PDF formatter v6197.