



SPEC® CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp®_rate2006 = 77.6

CELSIUS R650, Intel Xeon X5450 processor

SPECfp_rate_base2006 = 69.4

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

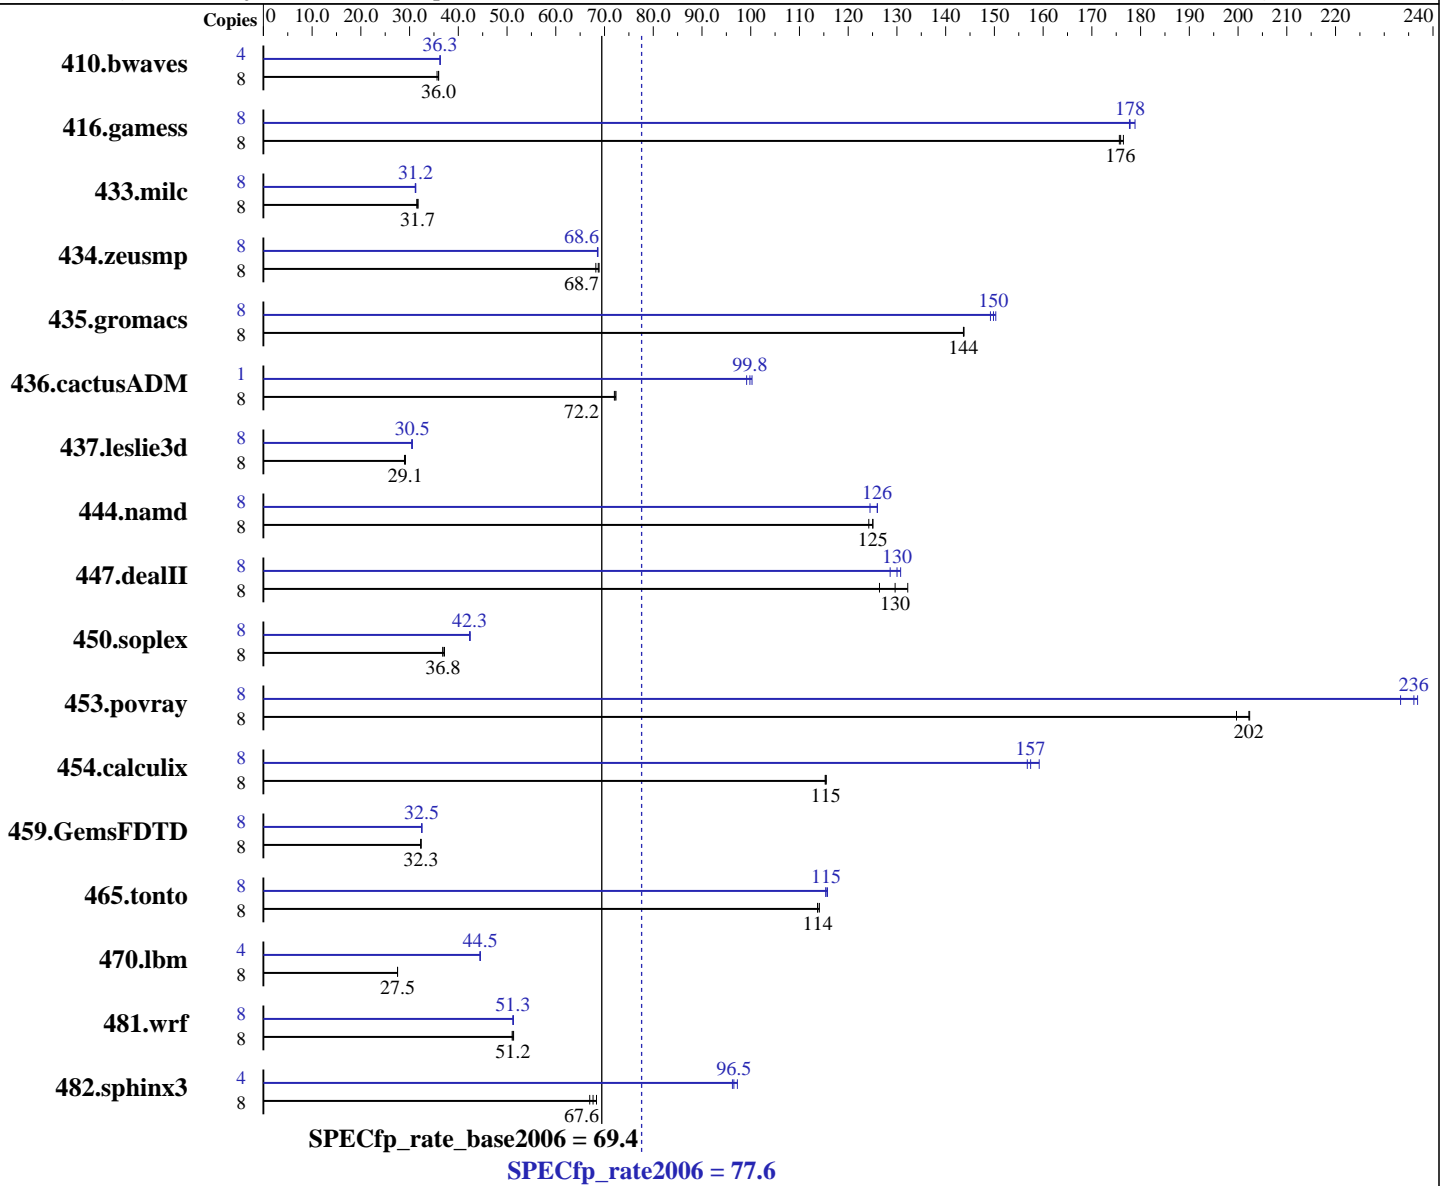

Hardware

CPU Name: Intel Xeon X5450
 CPU Characteristics:
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User, Run Level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = **77.6**

CELSIUS R650, Intel Xeon X5450 processor

SPECfp_rate_base2006 = **69.4**

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Hardware (Continued)

Software (Continued)

L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1 x 400 GB SATA II 7200 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: binutils-2.17.50.0.5-0.1.x86_64

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	3051	35.6	3024	36.0	<u>3024</u>	<u>36.0</u>	4	1499	36.3	<u>1499</u>	<u>36.3</u>	1498	36.3		
416.gamess	8	888	176	892	176	<u>890</u>	<u>176</u>	8	881	178	<u>881</u>	<u>178</u>	876	179		
433.milc	8	2334	31.5	2314	31.7	<u>2320</u>	<u>31.7</u>	8	2349	31.3	<u>2352</u>	<u>31.2</u>	2357	31.2		
434.zeusmp	8	1057	68.9	1067	68.2	<u>1059</u>	<u>68.7</u>	8	1062	68.5	<u>1061</u>	<u>68.6</u>	1061	68.6		
435.gromacs	8	<u>398</u>	<u>144</u>	397	144	398	144	8	<u>381</u>	<u>150</u>	380	150	383	149		
436.cactusADM	8	1327	72.0	1321	72.4	<u>1325</u>	<u>72.2</u>	1	121	99.2	119	100	<u>120</u>	<u>99.8</u>		
437.leslie3d	8	2597	29.0	<u>2585</u>	<u>29.1</u>	2580	29.1	8	<u>2463</u>	<u>30.5</u>	2471	30.4	2461	30.6		
444.namd	8	<u>513</u>	<u>125</u>	513	125	516	124	8	<u>509</u>	<u>126</u>	509	126	515	124		
447.dealII	8	692	132	724	126	<u>706</u>	<u>130</u>	8	<u>704</u>	<u>130</u>	700	131	712	129		
450.soplex	8	1795	37.2	<u>1811</u>	<u>36.8</u>	1812	36.8	8	1576	42.3	1572	42.4	<u>1576</u>	<u>42.3</u>		
453.povray	8	213	200	210	202	<u>210</u>	<u>202</u>	8	182	233	180	237	<u>180</u>	<u>236</u>		
454.calculix	8	<u>572</u>	<u>115</u>	571	116	573	115	8	415	159	<u>419</u>	<u>157</u>	421	157		
459.GemsFDTD	8	2623	32.4	<u>2626</u>	<u>32.3</u>	2628	32.3	8	2612	32.5	<u>2611</u>	<u>32.5</u>	2610	32.5		
465.tonto	8	<u>692</u>	<u>114</u>	692	114	690	114	8	682	115	680	116	<u>682</u>	<u>115</u>		
470.lbm	8	3994	27.5	<u>3993</u>	<u>27.5</u>	3992	27.5	4	1235	44.5	<u>1235</u>	<u>44.5</u>	1236	44.5		
481.wrf	8	1740	51.3	1751	51.0	<u>1745</u>	<u>51.2</u>	8	1741	51.3	<u>1743</u>	<u>51.3</u>	1745	51.2		
482.sphinx3	8	2281	68.4	2328	67.0	<u>2305</u>	<u>67.6</u>	4	<u>808</u>	<u>96.5</u>	810	96.2	802	97.3		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default).

Platform Notes

BIOS configuration:
 Enhanced Speedstep Technology = Disable
 Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable
 SnoopFilter = Enable



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 77.6

CELSIUS R650, Intel Xeon X5450 processor

SPECfp_rate_base2006 = 69.4

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

General Notes

All binaries were built with 64-bit Intel compiler except: 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with 32-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 77.6

CELSIUS R650, Intel Xeon X5450 processor

SPECfp_rate_base2006 = 69.4

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 77.6

CELSIUS R650, Intel Xeon X5450 processor

SPECfp_rate_base2006 = 69.4

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Dec-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 77.6

CELSIUS R650, Intel Xeon X5450 processor

SPECfp_rate_base2006 = 69.4

CPU2006 license: 22

Test date: Dec-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 14 10:51:41 2009 by SPEC CPU2006 PS/PDF formatter v6323.