



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8500)

SPECfp®2006 = 21.0

SPECfp_base2006 = 20.4

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Feb-2008

Hardware Availability: Feb-2008

Software Availability: Nov-2007

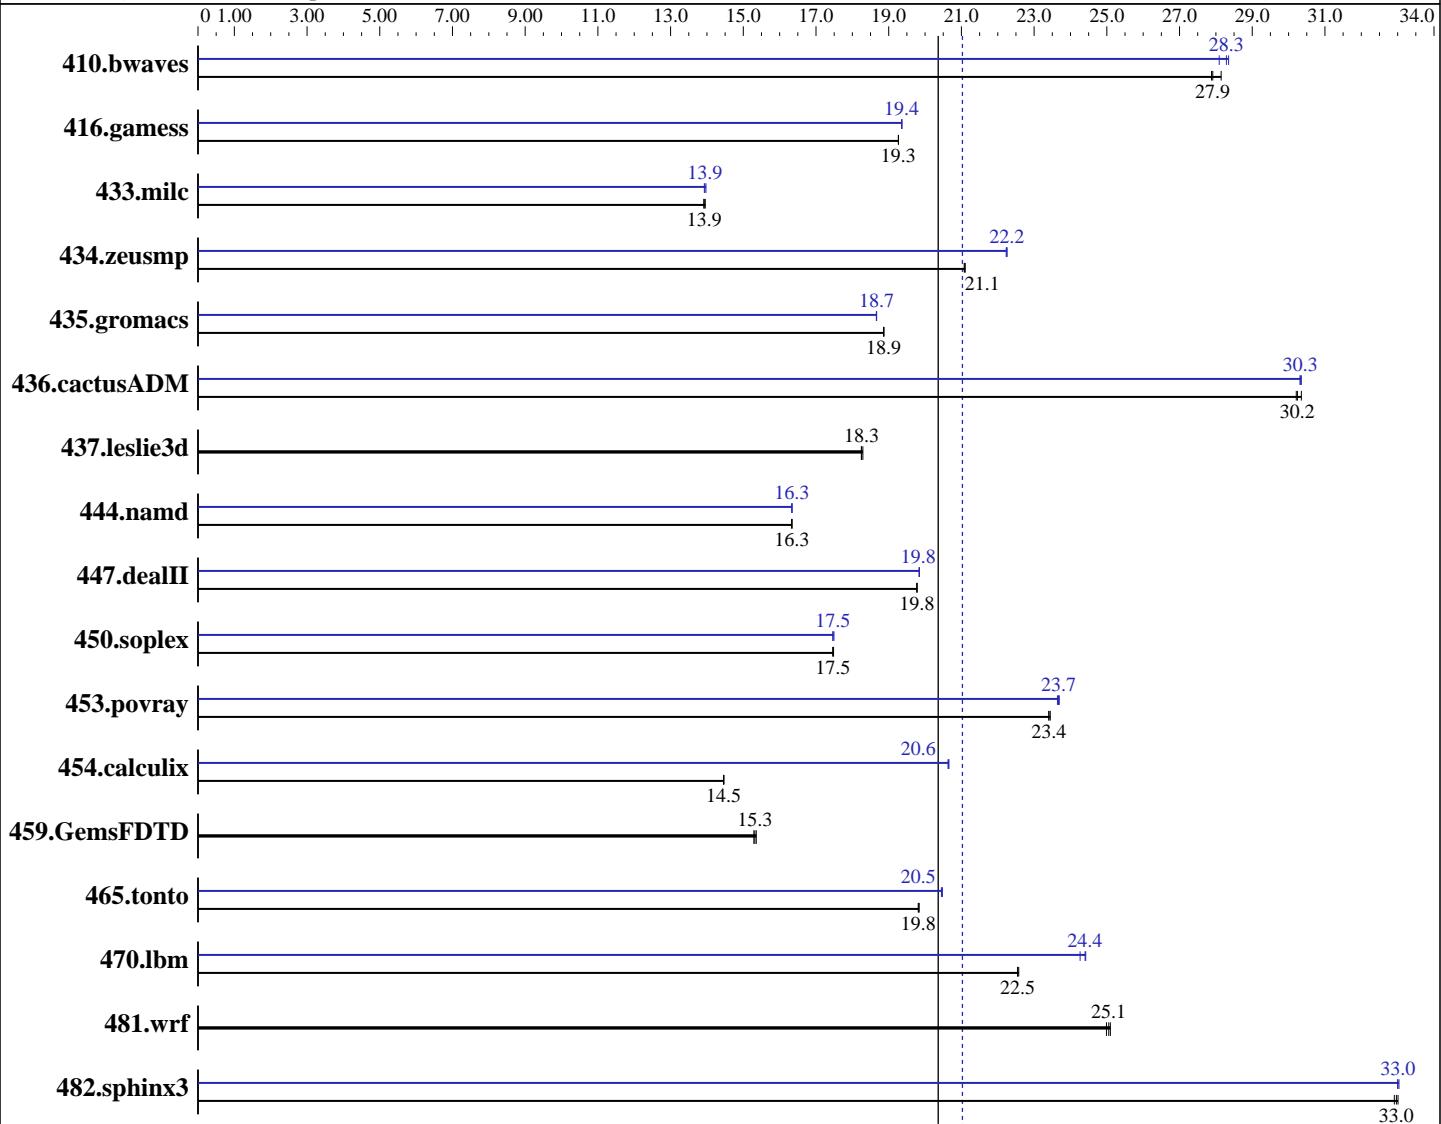

SPECfp_base2006 = 20.4

SPECfp2006 = 21.0

Hardware

CPU Name: Intel Core 2 Duo E8500
 CPU Characteristics: 3.16 GHz, 1333 FSB
 CPU MHz: 3167
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Software

Operating System: Windows Vista Ultimate (64-bit)
 Compiler: Intel C++ Compiler for IA32 version 10.1
 Build 20070913 Package ID: w_cc_p_10.1.011
 Intel Fortran Compiler for IA32 version 10.1
 Build 20070913 Package ID: w_fc_p_10.1.011
 Microsoft Visual Studio 2005 SP1 (for libraries)
 Auto Parallel: Yes
 File System: NTFS
 System State: Default

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8500)

SPECfp2006 = 21.0

SPECfp_base2006 = 20.4

CPU2006 license: 13

Test date: Feb-2008

Test sponsor: Intel Corporation

Hardware Availability: Feb-2008

Tested by: Intel Corporation

Software Availability: Nov-2007

L3 Cache: None
 Other Cache: None
 Memory: 2 GB (2x1GB Micron DDR2-800 CL5)
 Disk Subsystem: Seagate 320GB NCQ SATA, 16MB cache, 7200 RPM
 Other Hardware: None

Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	487	27.9	483	28.1	487	27.9	479	28.4	484	28.1	480	28.3
416.gamess	1016	19.3	1016	19.3	1016	19.3	1011	19.4	1011	19.4	1011	19.4
433.milc	660	13.9	659	13.9	658	14.0	658	13.9	659	13.9	657	14.0
434.zeusmp	432	21.1	431	21.1	431	21.1	409	22.3	409	22.2	409	22.2
435.gromacs	379	18.9	379	18.9	378	18.9	383	18.7	382	18.7	383	18.7
436.cactusADM	394	30.4	396	30.2	395	30.2	394	30.3	394	30.3	394	30.4
437.leslie3d	514	18.3	515	18.3	515	18.2	514	18.3	515	18.3	515	18.2
444.namd	491	16.3	491	16.3	491	16.3	491	16.3	491	16.3	491	16.3
447.dealII	578	19.8	578	19.8	578	19.8	577	19.8	577	19.8	576	19.8
450.soplex	478	17.5	477	17.5	478	17.5	478	17.5	477	17.5	478	17.5
453.povray	227	23.4	227	23.4	227	23.4	225	23.6	225	23.7	225	23.7
454.calculix	570	14.5	571	14.5	570	14.5	400	20.6	399	20.7	400	20.6
459.GemsFDTD	694	15.3	693	15.3	691	15.4	694	15.3	693	15.3	691	15.4
465.tonto	496	19.8	497	19.8	496	19.8	481	20.5	481	20.5	481	20.5
470.lbm	609	22.5	609	22.5	609	22.6	566	24.3	563	24.4	563	24.4
481.wrf	447	25.0	446	25.1	445	25.1	447	25.0	446	25.1	445	25.1
482.sphinx3	592	32.9	591	33.0	590	33.0	591	33.0	591	33.0	590	33.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply Product description located as of 03/2008:

<http://www.intel.com/products/motherboard/DQ35JO/index.htm>

The system bus runs at 1333 MHz

System was configured with Asus EN8800GTX discrete graphics card

Binaries were built on Windows Vista Ultimate (32-bit)

The following VS 2005 SP1 updates were applied: KB926601 and KB932232

Base Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation Intel Desktop Board DQ35JO (Intel Core 2 Duo E8500)	SPECfp2006 = 21.0 SPECfp_base2006 = 20.4
CPU2006 license: 13 Test sponsor: Intel Corporation Tested by: Intel Corporation	Test date: Feb-2008 Hardware Availability: Feb-2008 Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks: *icl -Ovc8*

Fortran benchmarks: ifort

Benchmarks using both Fortran and C:
 `icl -Ovc8 -Oc99 ifort`

Base Portability Flags

```
436.cactusADM: -Qlowercase /assume:underscore  
        444.namd: -TP  
        447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG  
        453.povray: -DSPEC_CPU_WINDOWS_ICL  
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase  
        481.wrf: -DSPEC_CPU_WINDOWS_ICL
```

Base Optimization Flags

C benchmarks:

-fast -Qparallel /F1000000000 libguide40.lib

C++ benchmarks:

```
-fast -Qparallel -Qcxx_features /F100000000000 shlw32m.lib  
libguide40.lib -link /FORCE:MULTIPLE
```

Fortran benchmarks:

-fast -Qparallel /F1000000000 libguide40.lib

Benchmarks using both Fortran and C:

-fast -Qparallel /F1000000000 libguide40.lib

Peak Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

C++ benchmarks:

icl -Qvc8

Fortran benchmarks:

ifort

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8500)

SPECfp2006 = 21.0

SPECfp_base2006 = 20.4

CPU2006 license: 13

Test date: Feb-2008

Test sponsor: Intel Corporation

Hardware Availability: Feb-2008

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icl -Qvc8 -Qc99 ifort

Peak Portability Flags

```
436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -fast -Qunroll12 -Oa /F1000000000 libguide40.lib
470.lbm: -fast -Qunroll12 -Qscalar-rep- -Qprefetch /F1000000000
          libguide40.lib
482.sphinx3: -fast -Qunroll12 /F1000000000 libguide40.lib
```

C++ benchmarks:

```
444.namd: -fast -Oa -Qcxx_features /F1000000000 shlw32m.lib
          libguide40.lib           -link /FORCE:MULTIPLE
447.dealII: -fast -Qunroll12 -Qprefetch -Qcxx_features /F1000000000
          shlw32m.lib libguide40.lib           -link /FORCE:MULTIPLE
450.soplex: -fast -Qparallel -Qcxx_features /F1000000000 shlw32m.lib
          libguide40.lib           -link /FORCE:MULTIPLE
453.povray: -fast -Qunroll4 -Qcxx_features /F1000000000 shlw32m.lib
          libguide40.lib           -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
410.bwaves: -fast -Qparallel -Qprefetch /F1000000000 libguide40.lib
416.gamess: -fast -Qunroll12 -Ob0 -Qansi-alias -Qscalar-rep-
            /F1000000000 libguide40.lib
434.zeusmp: -QxT -O2 -Qprec-div- -Qunroll0 -Qscalar-rep- /F1000000000
            libguide40.lib
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel Desktop Board DQ35JO (Intel Core 2 Duo E8500)

SPECfp2006 = 21.0

SPECfp_base2006 = 20.4

CPU2006 license: 13

Test date: Feb-2008

Test sponsor: Intel Corporation

Hardware Availability: Feb-2008

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -fast -Qunroll14 -Qauto /F1000000000 libguide40.lib

Benchmarks using both Fortran and C:

435.gromacs: -fast -Oa -Qprefetch /F1000000000 libguide40.lib

436.cactusADM: -fast -Qunroll12 -Qparallel -Qprefetch /F1000000000 libguide40.lib

454.calculix: -fast -Qunroll-aggressive /F1000000000 libguide40.lib

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 15:29:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 March 2008.