SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon X5450)

SPECint®2006 = 26.2

SPECint_base2006 = 23.1

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

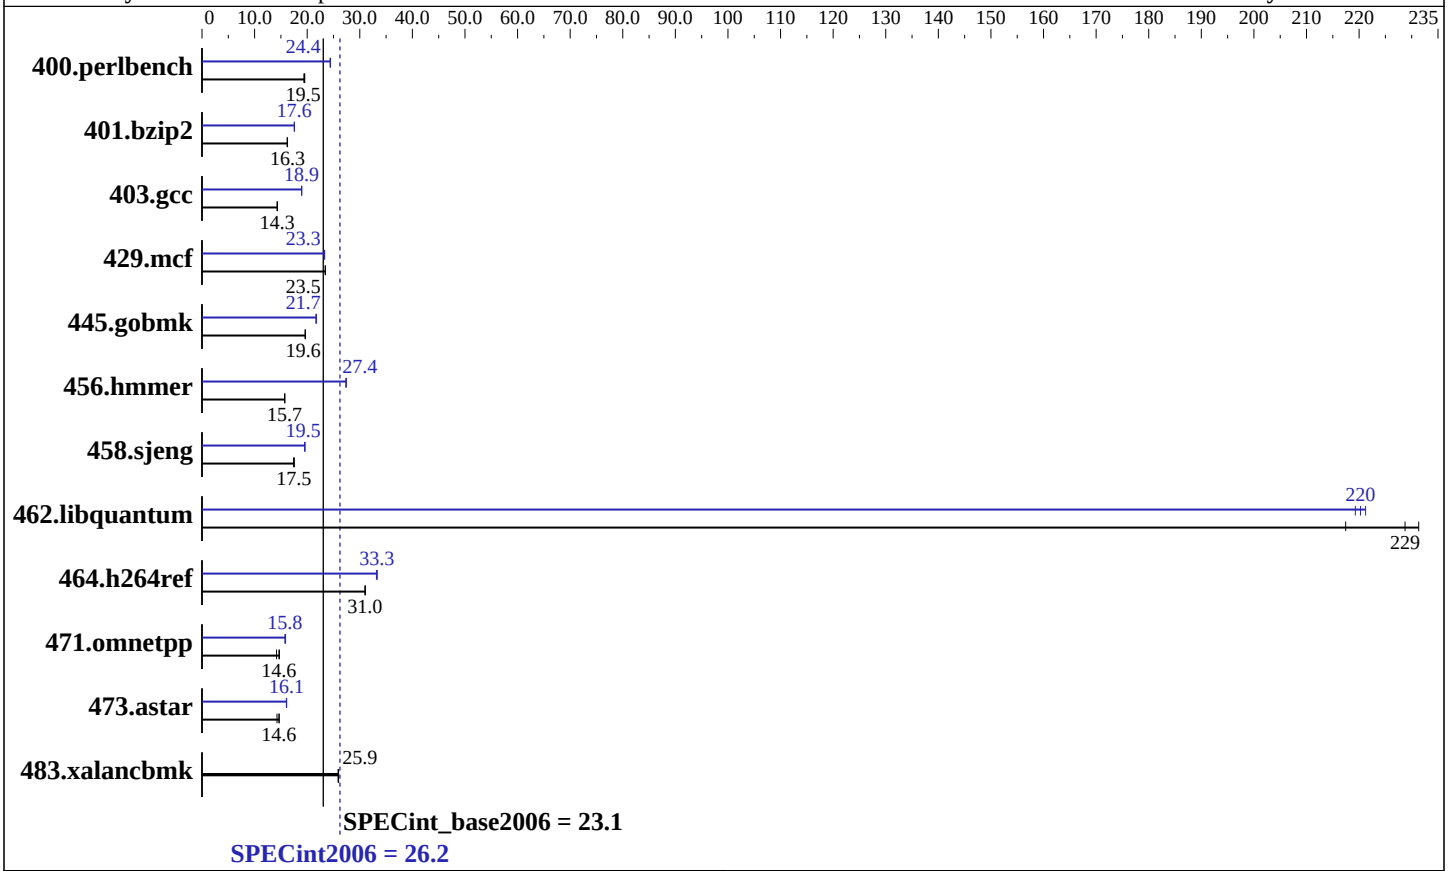

Hardware

CPU Name:	Intel Xeon X5450
CPU Characteristics:	3.00 GHz, 2x6 MB L2 shared, 1333 MHz bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73.2 GB SAS, 15000RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon X5450)

SPECint2006 = 26.2

SPECint_base2006 = 23.1

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Mar-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	504	19.4	500	19.5	**502**	**19.5**	400	24.4	401	24.4	**400**	**24.4**
401.bzip2	596	16.2	593	16.3	**594**	**16.3**	549	17.6	550	17.5	**549**	**17.6**
403.gcc	563	14.3	562	14.3	**562**	**14.3**	**425**	**18.9**	424	19.0	425	18.9
429.mcf	389	23.4	388	23.5	**389**	**23.5**	393	23.2	**392**	**23.3**	391	23.3
445.gobmk	534	19.6	**534**	**19.6**	534	19.6	**483**	**21.7**	482	21.7	483	21.7
456.hmmer	593	15.7	**593**	**15.7**	593	15.7	341	27.4	**341**	**27.4**	340	27.4
458.sjeng	690	17.5	695	17.4	**692**	**17.5**	618	19.6	619	19.5	**619**	**19.5**
462.libquantum	95.3	217	89.6	231	**90.6**	**229**	**94.1**	**220**	93.7	221	94.5	219
464.h264ref	713	31.1	**713**	**31.0**	714	31.0	**665**	**33.3**	667	33.2	665	33.3
471.omnetpp	**427**	**14.6**	425	14.7	441	14.2	395	15.8	393	15.9	**395**	**15.8**
473.astar	478	14.7	492	14.3	**480**	**14.6**	438	16.0	436	16.1	**437**	**16.1**
483.xalancbmk	**266**	**25.9**	266	26.0	266	25.9	**266**	**25.9**	266	26.0	266	25.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
```

Platform Notes

```
Bios settings:
Intel SpeedStep Technology: Disabled
```

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
```

Base Compiler Invocation

C benchmarks:
```
icc
```

C++ benchmarks:
```
icpc
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -vec-guard-write -parallel -par-runtime-control`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/opt/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/cce/10.1.008/bin/icc`
`-L/opt/intel/cce/10.1.008/lib`
`-I/opt/intel/cce/10.1.008/include`

456.hmmer: `/opt/intel/cce/10.1.008/bin/icc`
`-L/opt/intel/cce/10.1.008/lib`
`-I/opt/intel/cce/10.1.008/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.20090713.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.20090713.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:25:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.