



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 335

Bull Escala PL1660 (3.5 GHz, 16 cores)

SPECfp_rate_base2006 = 303

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2008

Hardware Availability: Oct-2007

Software Availability: Oct-2007

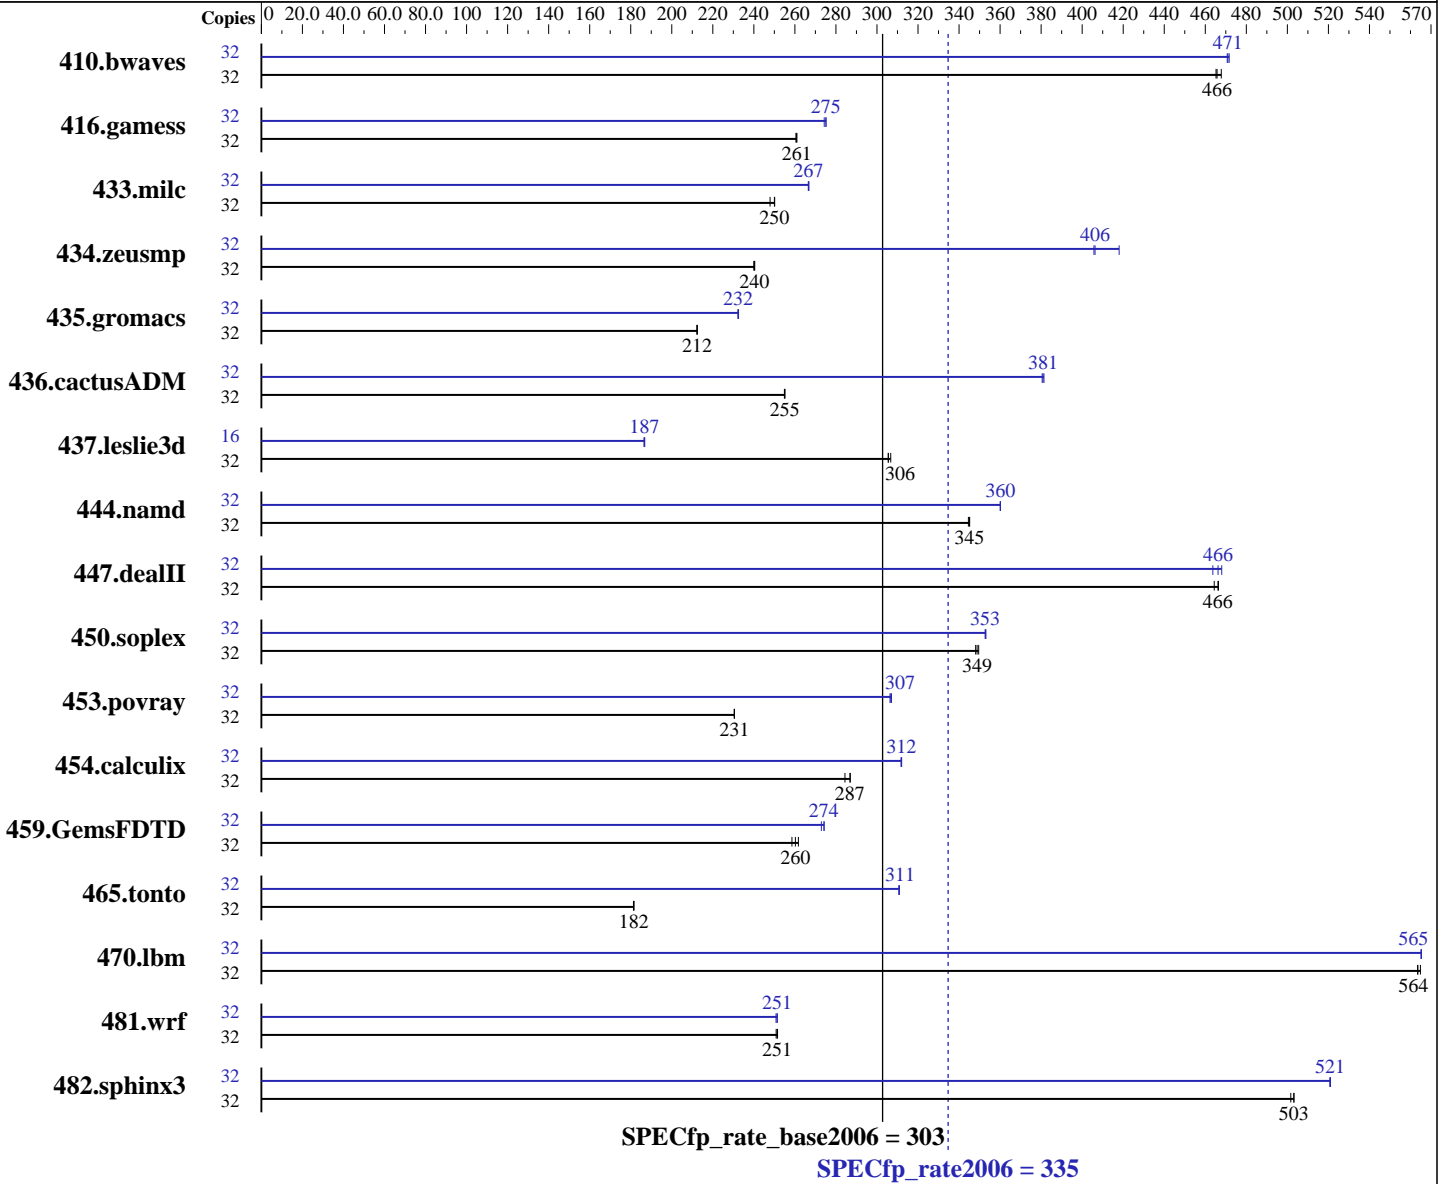

Hardware

CPU Name: POWER6
 CPU Characteristics: 3500
 FPU: Integrated
 CPU(s) enabled: 16 cores, 8 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 4,8,12,16 cores
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core

Continued on next page

Software

Operating System: IBM AIX 5L V5.3 updated with the 5300-07 Technology Level
 Compiler: XL C/C++ Enterprise Edition V9 for AIX Updated with the Oct2007 PTF.
 XL Fortran Enterprise Edition V11.1 for AIX Updated with the Oct2007 PTF.
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 335

Bull Escala PL1660 (3.5 GHz, 16 cores)

SPECfp_rate_base2006 = 303

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2008

Hardware Availability: Oct-2007

Software Availability: Oct-2007

L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 128 GB (64x2 GB) DDR2 667 MHz
Disk Subsystem: 2x73 GB SAS 15K RPM
Other Hardware: None

Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: --

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	935	465	930	468	934	466	32	924	471	923	471	922	472
416.gamess	32	2405	260	2402	261	2401	261	32	2277	275	2278	275	2284	274
433.milc	32	1185	248	1175	250	1174	250	32	1102	267	1102	267	1101	267
434.zeusmp	32	1213	240	1211	240	1212	240	32	718	406	697	418	717	406
435.gromacs	32	1076	212	1076	212	1076	212	32	983	232	983	233	984	232
436.cactusADM	32	1499	255	1500	255	1499	255	32	1003	381	1004	381	1005	381
437.leslie3d	32	985	306	981	307	984	306	16	806	187	805	187	807	186
444.namd	32	745	345	744	345	744	345	32	713	360	713	360	713	360
447.dealII	32	785	466	785	466	788	464	32	785	466	782	468	790	464
450.soplex	32	767	348	765	349	763	350	32	757	353	756	353	756	353
453.povray	32	738	231	739	230	739	231	32	556	306	554	307	555	307
454.calculix	32	928	284	920	287	920	287	32	846	312	846	312	847	312
459.GemsFDTD	32	1297	262	1313	259	1305	260	32	1244	273	1238	274	1238	274
465.tonto	32	1736	181	1735	182	1735	182	32	1013	311	1014	311	1013	311
470.lbm	32	778	565	780	564	780	564	32	778	565	778	565	778	565
481.wrf	32	1421	252	1425	251	1422	251	32	1422	251	1425	251	1422	251
482.sphinx3	32	1240	503	1243	502	1239	503	32	1198	521	1197	521	1197	521

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

See flags file of details on following settings.

all ulimits set to unlimited.

Environment variables set before executing benchmarks:

MALLOCOPTIONS=pool

MEMORY_AFFINITY=MCM

XLFRTEOPTS=intrinths=1

System set to "Enhanced" mode when defining partition on HMC.

bindprocessor command used on submit to bind each copy to a unique processor.

Remote console disabled in /etc/inittab.

fdpr binary optimization tool used for:

4000 16M large pages defined with vmo command

410.bwaves 433.milc 435.gromacs 436.cactusADM

453.povray 470.lbm 482.sphinx3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 335

Bull Escala PL1660 (3.5 GHz, 16 cores)

SPECfp_rate_base2006 = 303

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2008

Hardware Availability: Oct-2007

Software Availability: Oct-2007

Base Compiler Invocation

C benchmarks:

`/usr/vac/bin/xlc -qlanglvl=extc99`

C++ benchmarks:

`/usr/vacpp/bin/xlC`

Fortran benchmarks:

`/usr/bin/xlf95`

Benchmarks using both Fortran and C:

`/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95`

Base Portability Flags

410.bwaves: `-qfixed`

416.gamess: `-qfixed`

434.zeusmp: `-qfixed`

435.gromacs: `-qfixed -qextname`

436.cactusADM: `-qfixed -qextname`

437.leslie3d: `-qfixed`

454.calculix: `-qfixed -qextname`

481.wrf: `-DSPEC_CPU_AIX -DNOUNDERSCORE`

482.sphinx3: `-qchars=signed`

Base Optimization Flags

C benchmarks:

`-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata`

C++ benchmarks:

`-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all`

`-D__IBM_FAST_VECTOR -blpdata`

Fortran benchmarks:

`-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap`

`-qalias=nostd -blpdata`

Benchmarks using both Fortran and C:

`-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS`

`-qsmallstack=dynlenonheap -qalias=nostd -blpdata`



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 335

Bull Escala PL1660 (3.5 GHz, 16 cores)

SPECfp_rate_base2006 = 303

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Mar-2008
Hardware Availability: Oct-2007
Software Availability: Oct-2007

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 335

Bull Escala PL1660 (3.5 GHz, 16 cores)

SPECfp_rate_base2006 = 303

CPU2006 license: 20

Test date: Mar-2008

Test sponsor: Bull SAS

Hardware Availability: Oct-2007

Tested by: Bull SAS

Software Availability: Oct-2007

Peak Optimization Flags (Continued)

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -qfdpr -blpdata

470.lbm: -O5 -qlargepage -D_ILS_MACROS -qfdpr -q64 -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS

447.dealIII: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -blpdata

450.soplex: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -qenablevmx -qvecnv1 -qstrict -D_ILS_MACROS
-blpdata

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -qalign=natural -qfdpr -blpdata

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnv1
-qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qalias=nostd

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnv1
-qxl90=nosignedzero -blpdata

437.leslie3d: -O4 -qlargepage -q64 -blpdata

459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -q64 -blpdata

465.tonto: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -blpdata

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -qfdpr -D_ILS_MACROS -blpdata

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnv1
-qfdpr -qnostrict -D_ILS_MACROS -blpdata

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 335

Bull Escala PL1660 (3.5 GHz, 16 cores)

SPECfp_rate_base2006 = 303

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2008

Hardware Availability: Oct-2007

Software Availability: Oct-2007

Peak Optimization Flags (Continued)

454.calculix: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage
-D_ILS_MACROS -blpdata

481.wrf: -bmaxdata:0x30000000 -O5 -qlargepage -qalias=nostd
-D_ILS_MACROS -blpdata

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.06.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.06.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:34:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.