



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp®2006 = **21.8**

## IBM System x3200 M2 (Intel Xeon X3350)

SPECfp\_base2006 = **20.1**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

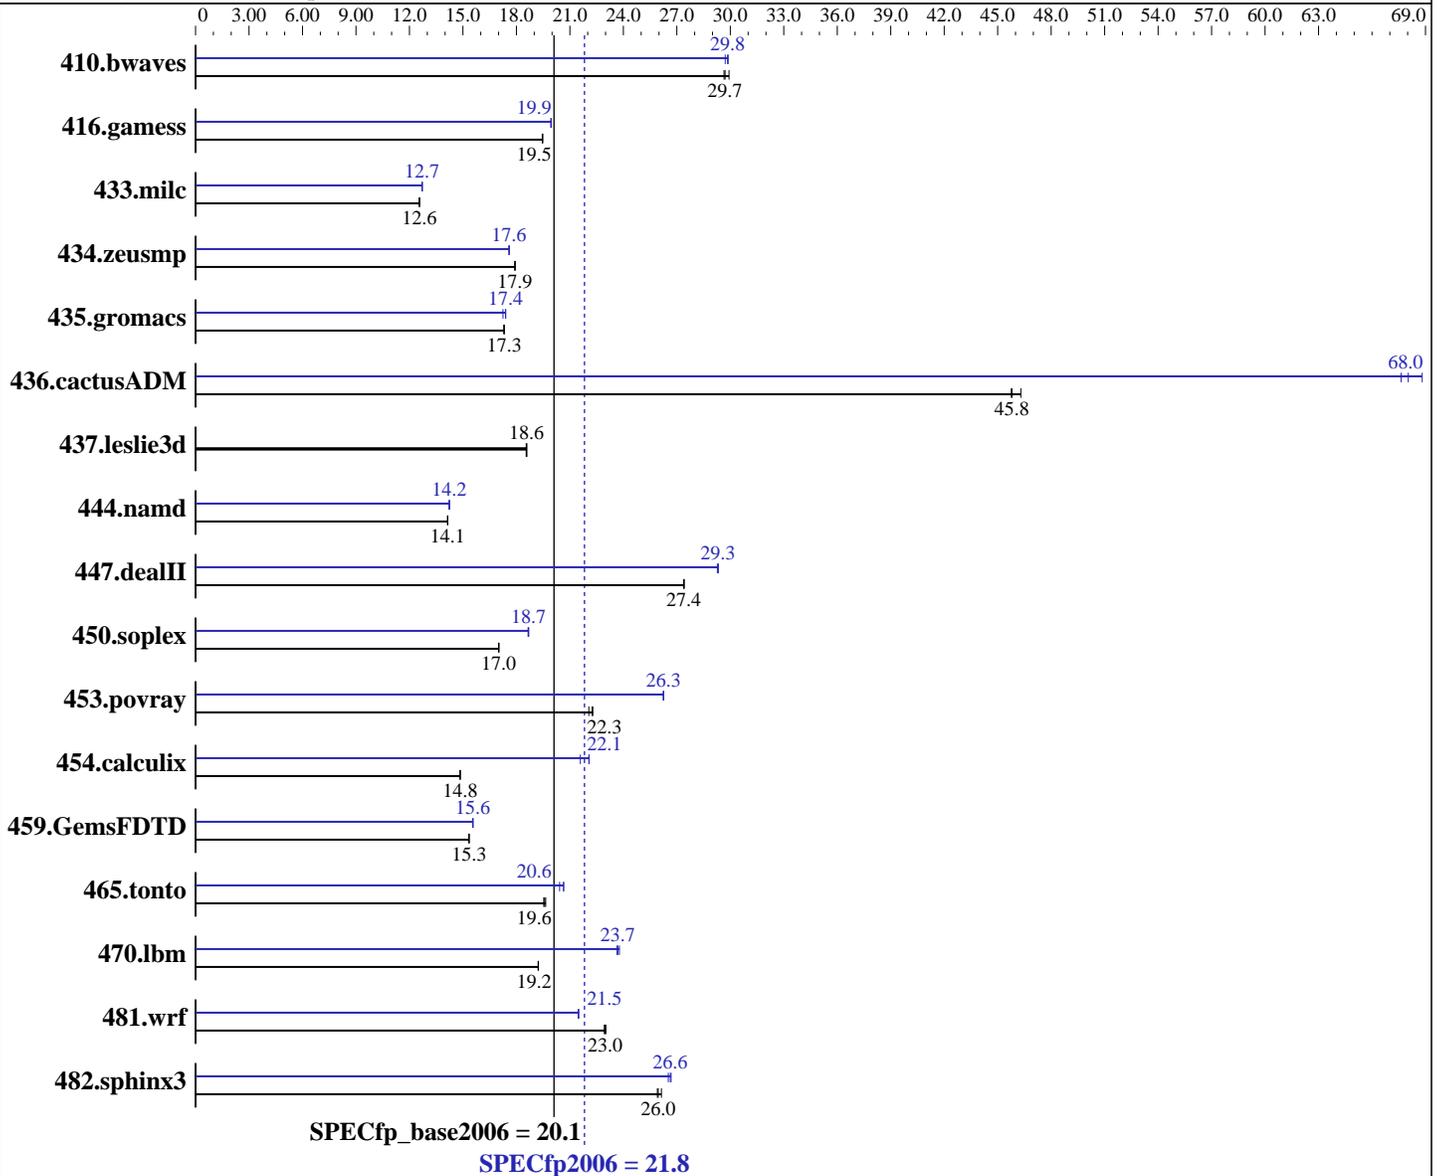

### Hardware

CPU Name: Intel Xeon X3350  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008, l\_fc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 21.8

IBM System x3200 M2 (Intel Xeon X3350)

SPECfp\_base2006 = 20.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (4 x 2 GB DDR2-5300 ECC)  
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.17.50.0.15

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	458	29.6	454	29.9	<b>457</b>	<b>29.7</b>	457	29.7	455	29.9	<b>455</b>	<b>29.8</b>
416.gamess	1005	19.5	<b>1006</b>	<b>19.5</b>	1007	19.5	<b>982</b>	<b>19.9</b>	981	20.0	982	19.9
433.milc	731	12.6	<b>731</b>	<b>12.6</b>	732	12.5	<b>722</b>	<b>12.7</b>	722	12.7	723	12.7
434.zeusmp	508	17.9	508	17.9	<b>508</b>	<b>17.9</b>	517	17.6	<b>517</b>	<b>17.6</b>	517	17.6
435.gromacs	413	17.3	412	17.3	<b>412</b>	<b>17.3</b>	410	17.4	<b>411</b>	<b>17.4</b>	414	17.2
436.cactusADM	258	46.3	261	45.8	<b>261</b>	<b>45.8</b>	<b>176</b>	<b>68.0</b>	174	68.8	177	67.6
437.leslie3d	<b>506</b>	<b>18.6</b>	507	18.5	506	18.6	<b>506</b>	<b>18.6</b>	507	18.5	506	18.6
444.namd	567	14.1	<b>567</b>	<b>14.1</b>	567	14.1	<b>563</b>	<b>14.2</b>	563	14.2	564	14.2
447.dealII	418	27.4	<b>418</b>	<b>27.4</b>	417	27.4	391	29.3	390	29.3	<b>390</b>	<b>29.3</b>
450.soplex	490	17.0	<b>490</b>	<b>17.0</b>	491	17.0	446	18.7	<b>447</b>	<b>18.7</b>	447	18.7
453.povray	<b>239</b>	<b>22.3</b>	239	22.3	241	22.1	203	26.3	<b>203</b>	<b>26.3</b>	203	26.2
454.calculix	<b>556</b>	<b>14.8</b>	556	14.8	556	14.8	<b>374</b>	<b>22.1</b>	374	22.1	382	21.6
459.GemsFDTD	691	15.3	<b>691</b>	<b>15.3</b>	692	15.3	681	15.6	682	15.5	<b>682</b>	<b>15.6</b>
465.tonto	501	19.6	<b>502</b>	<b>19.6</b>	504	19.5	476	20.7	<b>477</b>	<b>20.6</b>	482	20.4
470.lbm	715	19.2	<b>715</b>	<b>19.2</b>	714	19.2	578	23.8	<b>580</b>	<b>23.7</b>	581	23.6
481.wrf	<b>486</b>	<b>23.0</b>	487	22.9	485	23.0	520	21.5	<b>520</b>	<b>21.5</b>	520	21.5
482.sphinx3	<b>751</b>	<b>26.0</b>	746	26.1	752	25.9	731	26.7	<b>732</b>	<b>26.6</b>	735	26.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 64-bit mode except 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 200M

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 21.8

IBM System x3200 M2 (Intel Xeon X3350)

SPECfp\_base2006 = 20.1

CPU2006 license: 11

Test date: Jan-2008

Test sponsor: IBM Corporation

Hardware Availability: Apr-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast -parallel

C++ benchmarks:  
-fast -parallel

Fortran benchmarks:  
-fast -parallel

Benchmarks using both Fortran and C:  
-fast -parallel



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 21.8

IBM System x3200 M2 (Intel Xeon X3350)

SPECfp\_base2006 = 20.1

CPU2006 license: 11

Test date: Jan-2008

Test sponsor: IBM Corporation

Hardware Availability: Apr-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

```
433.milc: icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icc ifort
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-req- -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 21.8

IBM System x3200 M2 (Intel Xeon X3350)

SPECfp\_base2006 = 20.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 21.8

IBM System x3200 M2 (Intel Xeon X3350)

SPECfp\_base2006 = 20.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 18:30:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 April 2008.