SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision M6300 (Intel T9500, 2.60 GHz)

SPECint®_rate2006 = 33.2

SPECint_rate_base2006 = 31.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2008
Hardware Availability: Mar-2008
Software Availability: Mar-2008

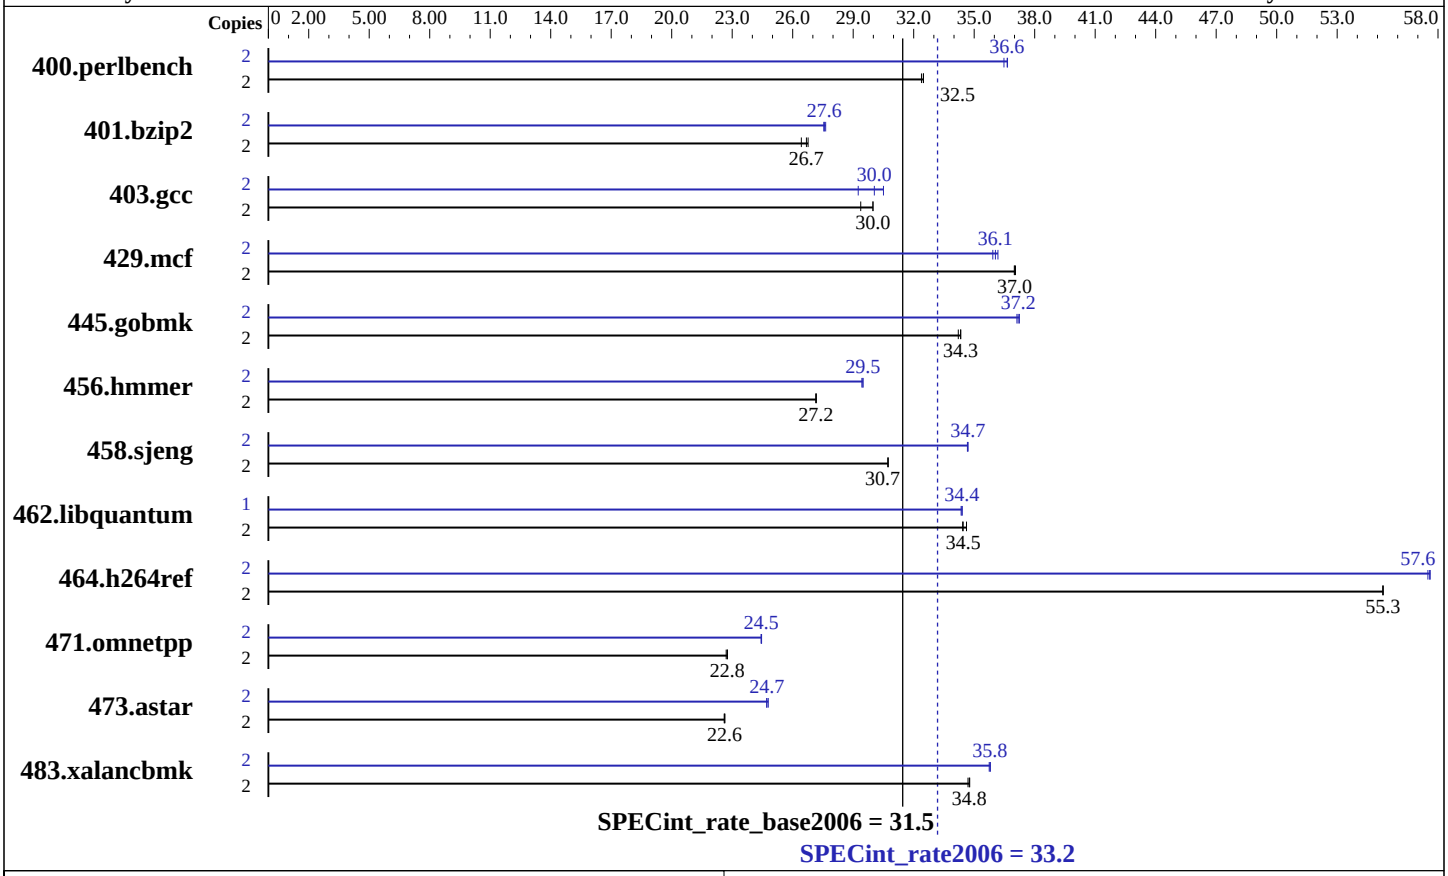

Hardware

CPU Name:	Intel Core 2 Duo T9500
CPU Characteristics:	800 MHz Bus Speed
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	4 GB (2x2 GB 667 MHz CL5 DDR2)
Disk Subsystem:	1 x 200GB SATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows Vista Ultimate (64-bit)
Compiler:	Intel C++ Compiler for IA-32, Version 10.1 Build 20080312 Package ID: w_cc_p_10.1.021 Microsoft Visual Studio 2005 SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision M6300 (Intel T9500, 2.60 GHz)

SPECint_rate2006 = 33.2

SPECint_rate_base2006 = 31.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2008
Hardware Availability: Mar-2008
Software Availability: Mar-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	603	32.4	**602**	**32.5**	601	32.5	2	536	36.5	533	36.7	**533**	**36.6**
401.bzip2	2	**723**	**26.7**	730	26.4	721	26.8	2	698	27.6	**700**	**27.6**	701	27.5
403.gcc	2	537	30.0	548	29.4	**537**	**30.0**	2	528	30.5	550	29.2	**536**	**30.0**
429.mcf	2	**493**	**37.0**	493	37.0	492	37.0	2	504	36.2	508	35.9	**506**	**36.1**
445.gobmk	2	613	34.2	611	34.3	**611**	**34.3**	2	**564**	**37.2**	563	37.2	565	37.1
456.hmmer	2	**687**	**27.2**	687	27.2	687	27.2	2	634	29.4	**633**	**29.5**	633	29.5
458.sjeng	2	788	30.7	**788**	**30.7**	788	30.7	2	698	34.7	**698**	**34.7**	698	34.7
462.libquantum	2	1197	34.6	1204	34.4	**1203**	**34.5**	1	603	34.4	602	34.4	**603**	**34.4**
464.h264ref	2	**801**	**55.3**	801	55.3	801	55.3	2	**769**	**57.6**	768	57.6	770	57.5
471.omnetpp	2	549	22.8	551	22.7	**549**	**22.8**	2	511	24.5	**511**	**24.5**	512	24.4
473.astar	2	621	22.6	620	22.6	**621**	**22.6**	2	**568**	**24.7**	568	24.7	566	24.8
483.xalancbmk	2	398	34.7	397	34.8	**397**	**34.8**	2	**386**	**35.8**	385	35.8	386	35.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:
```
icl -Qstd=c99
```

C++ benchmarks:
```
icl
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-fast -Qvec-guard-write /F512000000
```

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib
            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
`icl -Qstd=c99`

C++ benchmarks:
`icl`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qprefetch /F512000000`

401.bzip2: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qprefetch /F512000000`

403.gcc: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast /F512000000`

429.mcf: Same as 401.bzip2

445.gobmk: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-QxT -O2 -Qipo -Qprec-div- -Qansi-alias /F512000000`

456.hmmer: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qunroll2 -Qansi-alias -Qopt-multi-version-aggressive /F512000000`

458.sjeng: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qunroll4 /F512000000`

462.libquantum: `-fast -Qunroll4 -Ob0 -Qprefetch -Qopt-streaming-stores:always -Qparallel -Qpar-runtime-control /F512000000 shlw32mt.lib`

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qunroll2 -Qansi-alias /F512000000`

C++ benchmarks:

471.omnetpp: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qopt-ra-region-strategy=block -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

473.astar: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qopt-ra-region-strategy=routine -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

483.xalancbmk: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:08:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.