



SPEC[®] CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Supermicro

SPECfp[®]_rate2006 = Not Run

A+ Server 2021M-UR+B, AMD Opteron 2356

SPECfp_rate_base2006 = 64.4

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2008

Hardware Availability: Apr-2008

Software Availability: Mar-2008

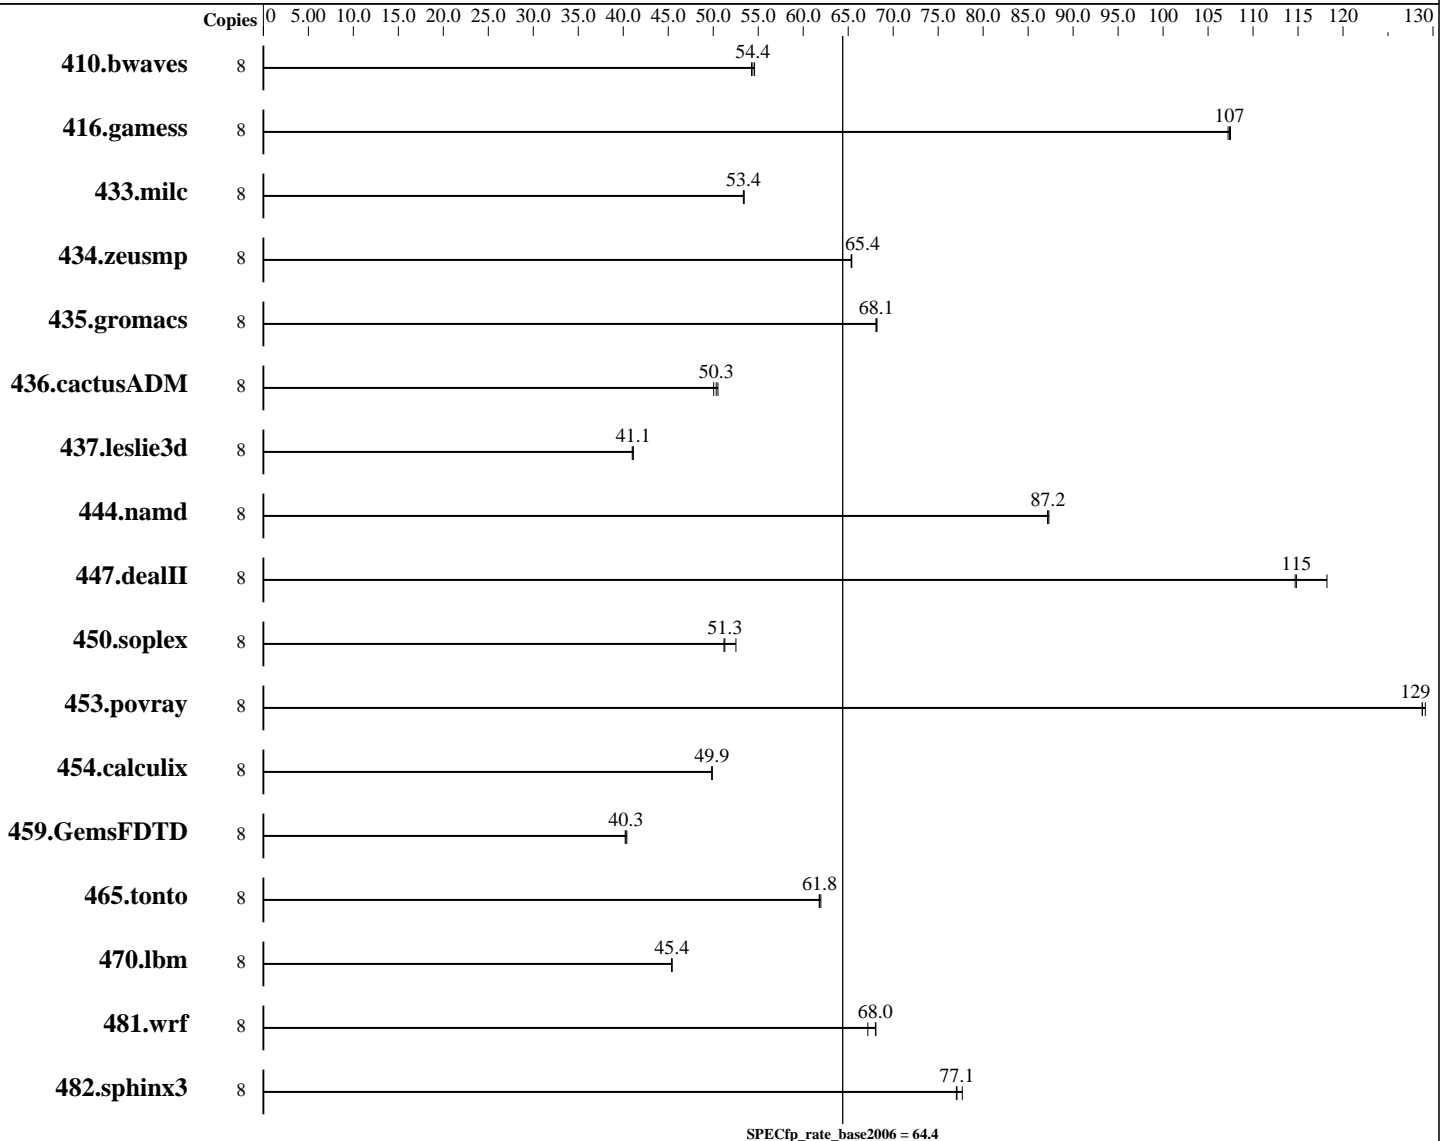

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: gcc, g++, gfortran 4.3.0
 Auto Parallel: No
 File System: ext3
 System State: Runlevel 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = Not Run

A+ Server 2021M-UR+B, AMD Opteron 2356

SPECfp_rate_base2006 = 64.4

CPU2006 license: 49

Test date: Apr-2008

Test sponsor: Advanced Micro Devices

Hardware Availability: Apr-2008

Tested by: Advanced Micro Devices

Software Availability: Mar-2008

Hardware (Continued)

L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (8 x 2GB, DDR2-667 CL5 ECC Reg Dual Rank)
 Disk Subsystem: 1 x 120 GB SATA, 7200 RPM
 Other Hardware: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	1991	54.6	<u>1998</u>	<u>54.4</u>	2004	54.3									
416.gamess	8	<u>1459</u>	<u>107</u>	1461	107	1457	107									
433.milc	8	1374	53.4	<u>1376</u>	<u>53.4</u>	1377	53.3									
434.zeusmp	8	<u>1114</u>	<u>65.4</u>	1114	65.3	1113	65.4									
435.gromacs	8	837	68.2	<u>838</u>	<u>68.1</u>	839	68.1									
436.cactusADM	8	<u>1899</u>	<u>50.3</u>	1910	50.1	1892	50.5									
437.leslie3d	8	1829	41.1	<u>1830</u>	<u>41.1</u>	1834	41.0									
444.namd	8	735	87.3	<u>736</u>	<u>87.2</u>	736	87.2									
447.dealII	8	774	118	<u>797</u>	<u>115</u>	798	115									
450.soplex	8	1270	52.5	<u>1301</u>	<u>51.3</u>	1303	51.2									
453.povray	8	<u>330</u>	<u>129</u>	330	129	330	129									
454.calculix	8	1323	49.9	<u>1323</u>	<u>49.9</u>	1324	49.8									
459.GemsFDTD	8	2101	40.4	<u>2107</u>	<u>40.3</u>	2111	40.2									
465.tonto	8	1270	62.0	1274	61.8	<u>1274</u>	<u>61.8</u>									
470.lbm	8	2420	45.4	<u>2421</u>	<u>45.4</u>	2422	45.4									
481.wrf	8	<u>1314</u>	<u>68.0</u>	1313	68.1	1330	67.2									
482.sphinx3	8	2007	77.7	<u>2023</u>	<u>77.1</u>	2024	77.0									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'numactl' was used to bind copies to the cores

Base Compiler Invocation

C benchmarks:
gcc

C++ benchmarks:
g++

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = Not Run

A+ Server 2021M-UR+B, AMD Opteron 2356

SPECfp_rate_base2006 = 64.4

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2008

Hardware Availability: Apr-2008

Software Availability: Mar-2008

Base Compiler Invocation (Continued)

Fortran benchmarks:
gfortran

Benchmarks using both Fortran and C:
gcc gfortran

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-O3 -funroll-loops -fno-strict-aliasing

C++ benchmarks:
-O3 -funroll-loops -fno-strict-aliasing

Fortran benchmarks:
-O3 -funroll-loops -fno-strict-aliasing

Benchmarks using both Fortran and C:
-O3 -funroll-loops -fno-strict-aliasing

```

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20080805.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20080805.xml



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = Not Run

A+ Server 2021M-UR+B, AMD Opteron 2356

SPECfp_rate_base2006 = 64.4

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Apr-2008

Hardware Availability: Apr-2008

Software Availability: Mar-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Aug 5 15:29:30 2008 by SPEC CPU2006 PS/PDF formatter v6197.