



# SPEC® CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

**SPECfp®2006 = 17.6**

CELSIUS V840, AMD Opteron 2350 (2.0 GHz)

**SPECfp\_base2006 = 15.8**

CPU2006 license: 22


Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

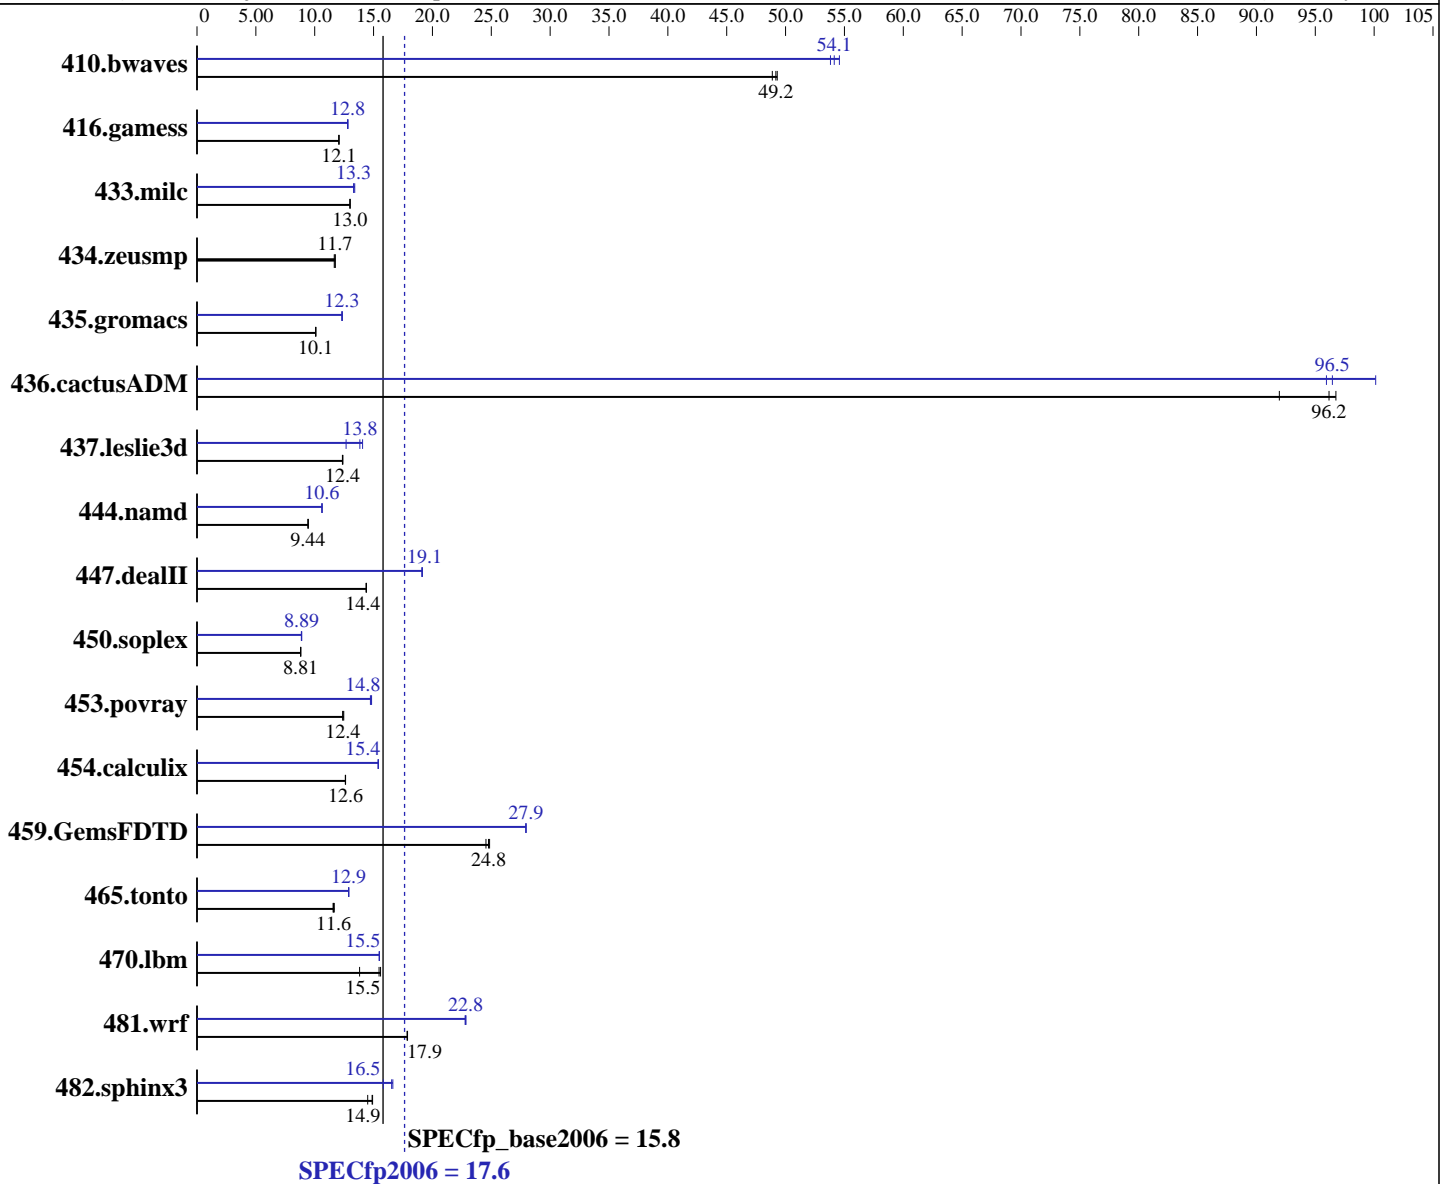

**Hardware**

CPU Name: AMD Opteron 2350  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

**Software**

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Workstation Complete Version 7.2-1 PathScale Compiler Suite, Release 3.2 Beta  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Multi-User SuSE Run Level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECfp2006 = **17.6**

CELSIUS V840, AMD Opteron 2350 (2.0 GHz)

SPECfp\_base2006 = **15.8**

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (8x2GB PC2-5300P, CL5, dual rank ECC)  
 Disk Subsystem: 1 x 400 GB SATA II  
 Other Hardware: None

Other Software: binutils 2.18.50

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	276	49.3	<b><u>276</u></b>	<b><u>49.2</u></b>	278	48.9	<b><u>251</u></b>	<b><u>54.1</u></b>	249	54.6	253	53.8
416.gamess	1625	12.0	<b><u>1623</u></b>	<b><u>12.1</u></b>	1623	12.1	<b><u>1529</u></b>	<b><u>12.8</u></b>	1526	12.8	1531	12.8
433.milc	706	13.0	706	13.0	<b><u>706</u></b>	<b><u>13.0</u></b>	690	13.3	<b><u>689</u></b>	<b><u>13.3</u></b>	685	13.4
434.zeusmp	781	11.7	<b><u>776</u></b>	<b><u>11.7</u></b>	775	11.7	781	11.7	<b><u>776</u></b>	<b><u>11.7</u></b>	775	11.7
435.gromacs	707	10.1	708	10.1	<b><u>708</u></b>	<b><u>10.1</u></b>	<b><u>579</u></b>	<b><u>12.3</u></b>	578	12.3	580	12.3
436.cactusADM	<b><u>124</u></b>	<b><u>96.2</u></b>	124	96.8	130	91.9	<b><u>124</u></b>	<b><u>96.5</u></b>	119	100	125	95.9
437.leslie3d	<b><u>760</u></b>	<b><u>12.4</u></b>	761	12.4	759	12.4	668	14.1	<b><u>679</u></b>	<b><u>13.8</u></b>	742	12.7
444.namd	850	9.44	850	9.44	<b><u>850</u></b>	<b><u>9.44</u></b>	756	10.6	<b><u>755</u></b>	<b><u>10.6</u></b>	754	10.6
447.dealII	<b><u>795</u></b>	<b><u>14.4</u></b>	795	14.4	796	14.4	597	19.2	<b><u>598</u></b>	<b><u>19.1</u></b>	599	19.1
450.soplex	946	8.81	<b><u>947</u></b>	<b><u>8.81</u></b>	947	8.81	<b><u>938</u></b>	<b><u>8.89</u></b>	941	8.86	938	8.89
453.povray	427	12.5	<b><u>429</u></b>	<b><u>12.4</u></b>	430	12.4	361	14.7	359	14.8	<b><u>360</u></b>	<b><u>14.8</u></b>
454.calculix	<b><u>654</u></b>	<b><u>12.6</u></b>	654	12.6	655	12.6	<b><u>536</u></b>	<b><u>15.4</u></b>	536	15.4	536	15.4
459.GemsFDTD	432	24.5	<b><u>428</u></b>	<b><u>24.8</u></b>	427	24.9	380	28.0	<b><u>380</u></b>	<b><u>27.9</u></b>	380	27.9
465.tonto	<b><u>849</u></b>	<b><u>11.6</u></b>	851	11.6	844	11.7	763	12.9	<b><u>763</u></b>	<b><u>12.9</u></b>	764	12.9
470.lbm	995	13.8	881	15.6	<b><u>888</u></b>	<b><u>15.5</u></b>	<b><u>887</u></b>	<b><u>15.5</u></b>	887	15.5	887	15.5
481.wrf	<b><u>625</u></b>	<b><u>17.9</u></b>	625	17.9	626	17.9	489	22.9	490	22.8	<b><u>490</u></b>	<b><u>22.8</u></b>
482.sphinx3	1307	14.9	<b><u>1310</u></b>	<b><u>14.9</u></b>	1344	14.5	1231	15.8	1171	16.6	<b><u>1179</u></b>	<b><u>16.5</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```

powersave -f is applied to set CPU to maximum frequency prior to run
stacksize is set to unlimited prior to run
ulimit -l 2457600
PGI_HUGE_PAGES set to 150
(Total number of huge pages available is 1200)

```

## General Notes

For information about Fujitsu Siemens Computers please see:  
<http://www.fujitsu-siemens.com>



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 17.6

CELSIUS V840, AMD Opteron 2350 (2.0 GHz)

SPECfp\_base2006 = 15.8

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge:896 -Mconcur -Mfprelaxed -Mipa=jobs:4  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur --zc\_eh  
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-fastsse -Mfprelaxed -Msmartalloc=huge:896 -Mconcur -Mipa=jobs:4  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 17.6

CELSIUS V840, AMD Opteron 2350 (2.0 GHz)

SPECfp\_base2006 = 15.8

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge:896 -Mconcur -Mfprelaxed -Mipa=jobs:4  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

470.lbm: pathcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpcpp

Fortran benchmarks (except as noted below):

pgf95

459.GemsFDTD: pathf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 17.6

CELSIUS V840, AMD Opteron 2350 (2.0 GHz)

SPECfp\_base2006 = 15.8

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

## Peak Optimization Flags

C benchmarks:

433.milc: -fastsse -Msmartalloc=huge:896 -Msafeptr -Mconcur  
-Mfprelaxed -Mipa=jobs:4 -Mipa=inline -Mipa=arg  
-Mipa=const -Mipa=ptr -Mipa=shape -tp barcelona-64  
-Bstatic\_pgi

470.lbm: -march=barcelona -Ofast -CG:sse\_cse\_regs=0  
-CG:locs\_shallow\_depth=1 -m3dnw -apo

482.sphinx3: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mfprelaxed -Msmartalloc -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge:896 -Mnodepchk  
-Mfprelaxed --zc\_eh -tp barcelona-64 -Bstatic\_pgi

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-fno-exceptions -m32 -apo

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -TENV:frame\_pointer=off  
-LNO:prefetch=1 -OPT:malloc\_alg=1 -CG:load\_exe=0 -m32 -apo

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta  
-Mconcur -Mloop32 -Mpre -Mfprelaxed -Mipa=jobs:4  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

416.gamess: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=noaltcode -Mprefetch=t0 -Mfprelaxed -tp barcelona-64  
-Bstatic\_pgi

434.zeusmp: basepeak = yes

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mconcur=noaltcode(pass 2) -Mipa=jobs:4(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=fuse -Msmartalloc=huge:896 -Mprefetch=distance:8  
-Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 17.6

CELSIUS V840, AMD Opteron 2350 (2.0 GHz)

SPECfp\_base2006 = 15.8

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

## Peak Optimization Flags (Continued)

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -apo

465.tonto: -fastsse -O4 -Mvect=noaltcode -Msmartalloc=huge:896  
-Mprefetch=distance:8 -Mprefetch=t0 -Mfprelaxed  
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -tp barcelona-64  
-Bstatic\_pgi

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur  
-Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

436.cactusADM: -fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur -Mdse  
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -tp barcelona-64  
-Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=jobs:4(pass 2) -Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-fastsse -Msmartalloc=huge:896 -Mloop32 -Mprefetch=t0  
-Mpre -Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc  
-Mprefetch=distance:8 -Mconcur=noaltcode -Mfprelaxed  
-tp barcelona-64 -Bstatic\_pgi

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/fsc-mix-pgi-path.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/fsc-mix-pgi-path.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Mar 20 17:50:51 2012 by SPEC CPU2006 PS/PDF formatter v6524.