



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260+
(Intel Xeon L5420, 2.50 GHz)

SPECfp_rate2006 = 69.5

SPECfp_rate_base2006 = 61.9

CPU2006 license: 20


Test date: Aug-2008

Test sponsor: Bull SAS

Hardware Availability: Jan-2008

Tested by: Bull SAS

Software Availability: Nov-2007

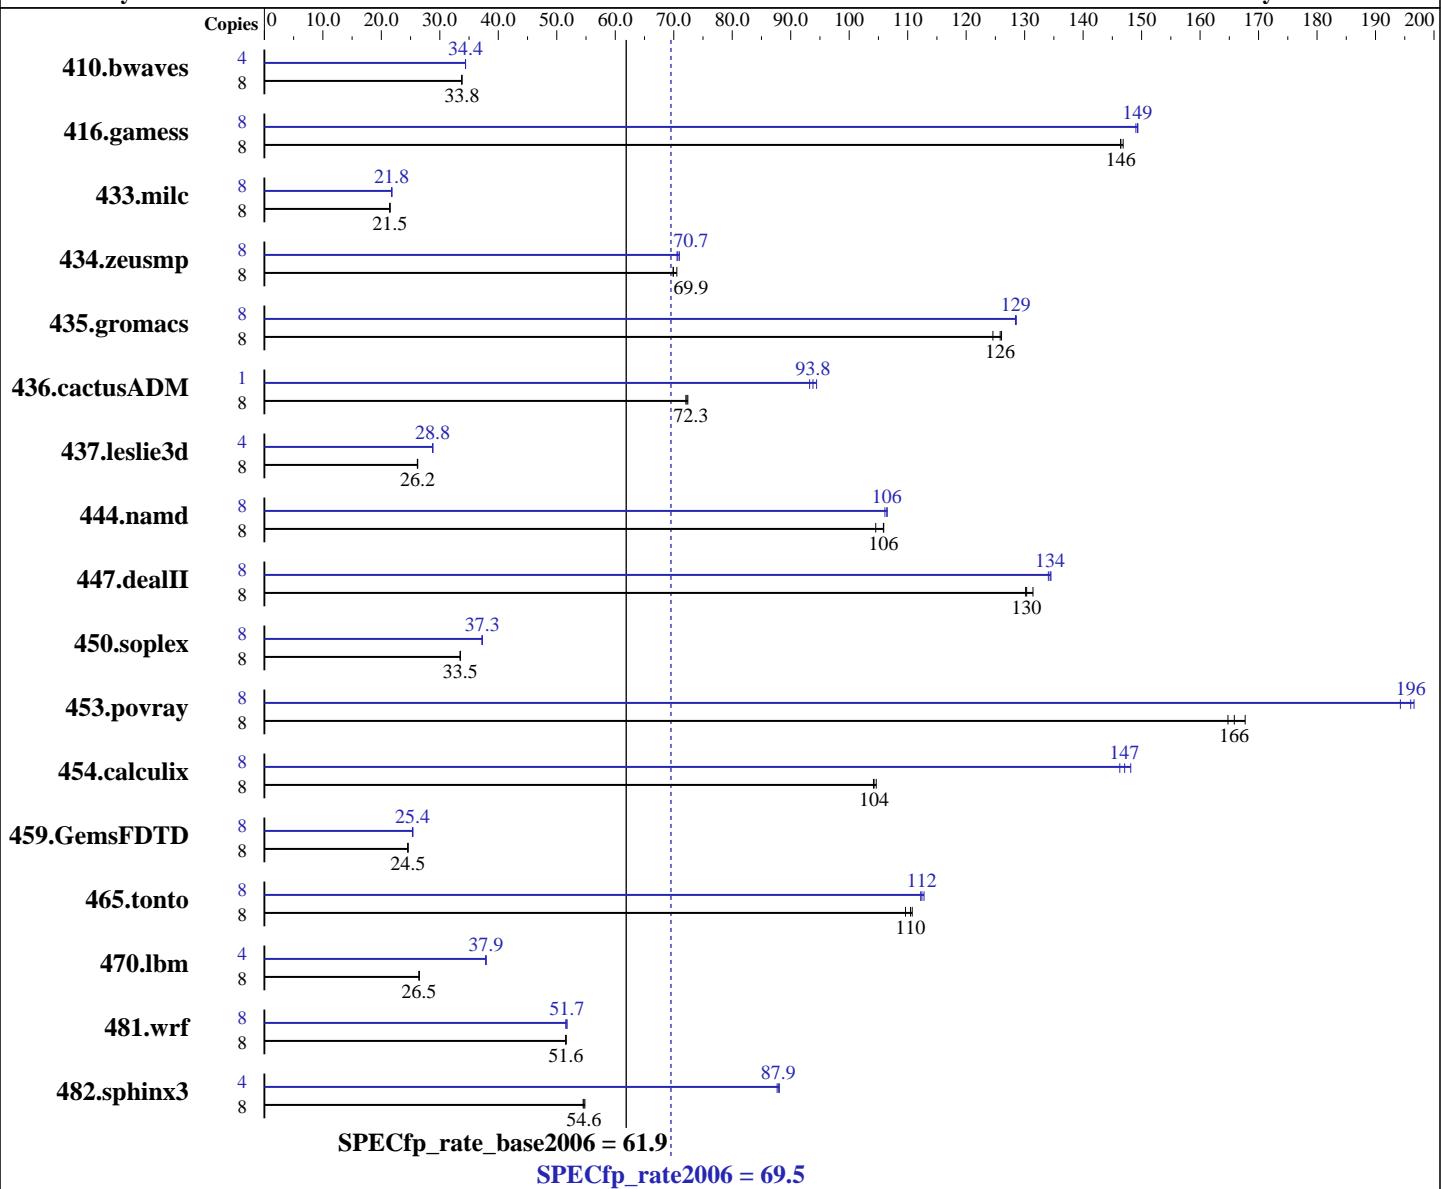

Hardware

CPU Name: Intel Xeon L5420
CPU Characteristics: 1333 MHz system bus
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SUSE LINUX Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel: Yes
File System: ext2
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260+
(Intel Xeon L5420, 2.50 GHz)

SPECfp_rate2006 = 69.5

SPECfp_rate_base2006 = 61.9

CPU2006 license: 20

Test date: Aug-2008

Test sponsor: Bull SAS

Hardware Availability: Jan-2008

Tested by: Bull SAS

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem: 1x73 GB SAS, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3220	33.8	3219	33.8	3220	33.8	4	1580	34.4	1581	34.4	1581	34.4
416.gamess	8	1067	147	1070	146	1070	146	8	1051	149	1049	149	1049	149
433.milc	8	3423	21.5	3418	21.5	3425	21.4	8	3366	21.8	3374	21.8	3376	21.8
434.zeusmp	8	1042	69.9	1041	69.9	1032	70.5	8	1026	71.0	1032	70.6	1030	70.7
435.gromacs	8	459	125	454	126	453	126	8	444	129	444	129	445	128
436.cactusADM	8	1326	72.1	1320	72.4	1323	72.3	1	127	94.4	128	93.2	127	93.8
437.leslie3d	8	2871	26.2	2869	26.2	2875	26.2	4	1306	28.8	1306	28.8	1306	28.8
444.namd	8	614	105	606	106	606	106	8	603	106	602	106	605	106
447.dealII	8	702	130	696	131	703	130	8	683	134	680	134	681	134
450.soplex	8	1992	33.5	1993	33.5	1989	33.5	8	1789	37.3	1789	37.3	1794	37.2
453.povray	8	254	168	257	166	258	165	8	217	196	216	197	219	194
454.calculix	8	633	104	631	105	634	104	8	449	147	451	146	446	148
459.GemsFDTD	8	3459	24.5	3455	24.6	3460	24.5	8	3344	25.4	3345	25.4	3353	25.3
465.tonto	8	712	110	711	111	718	110	8	698	113	700	112	701	112
470.lbm	8	4154	26.5	4154	26.5	4154	26.5	4	1452	37.9	1451	37.9	1450	37.9
481.wrf	8	1733	51.6	1732	51.6	1735	51.5	8	1727	51.7	1734	51.5	1728	51.7
482.sphinx3	8	2845	54.8	2860	54.5	2854	54.6	4	889	87.7	885	88.1	887	87.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex,
470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode

BIOS settings :

Hardware Prefetcher :	Enabled
Adjacent Cache-Line Prefetch :	Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260+
(Intel Xeon L5420, 2.50 GHz)

SPECfp_rate2006 = 69.5

SPECfp_rate_base2006 = 61.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Aug-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260+
(Intel Xeon L5420, 2.50 GHz)

SPECfp_rate2006 = 69.5

SPECfp_rate_base2006 = 61.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Aug-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

```
ifort
```

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

```
icc ifort
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-scalar-rep -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260+
(Intel Xeon L5420, 2.50 GHz)

SPECfp_rate2006 = 69.5

SPECfp_rate_base2006 = 61.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Aug-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090714.html



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B260+
(Intel Xeon L5420, 2.50 GHz)

SPECfp_rate2006 = 69.5

SPECfp_rate_base2006 = 61.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Aug-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090714.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 19:34:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 September 2008.