



SPEC® CINT2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®_rate2006 = 150

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECint_rate_base2006 = 137

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2008

Hardware Availability: Oct-2008

Software Availability: Aug-2008

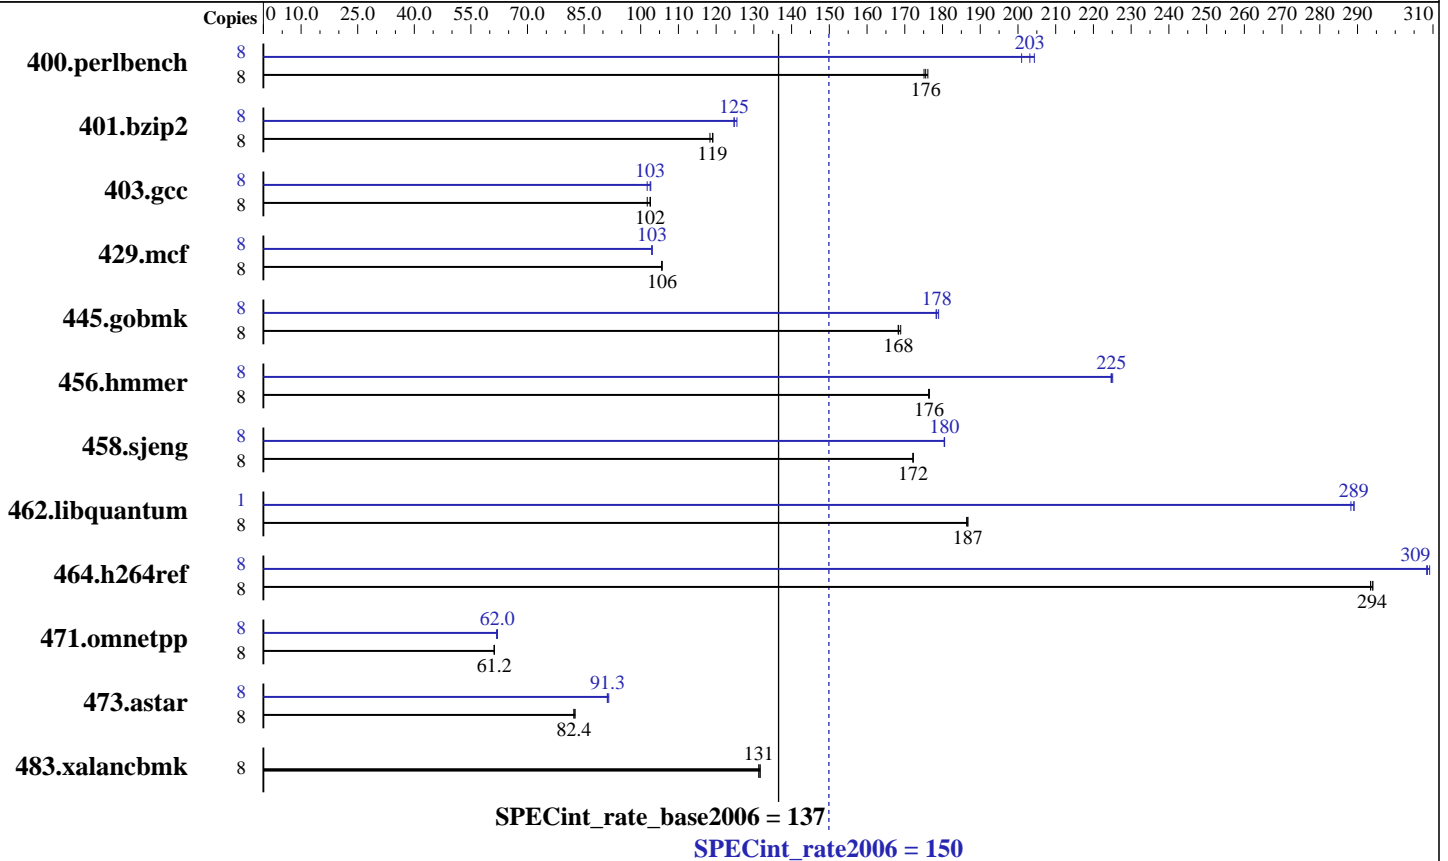

Hardware

CPU Name: Intel Xeon X5470
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x SATA, 80 GB, 7200 rpm
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap Library, Version 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 150

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECint_rate_base2006 = 137

CPU2006 license: 22

Test date: Nov-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Aug-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	445	176	446	175	444	176	8	389	201	383	204	385	203
401.bzip2	8	648	119	652	118	648	119	8	619	125	619	125	615	126
403.gcc	8	628	102	628	103	633	102	8	628	103	627	103	633	102
429.mcf	8	691	106	691	106	690	106	8	709	103	708	103	708	103
445.gobmk	8	498	168	497	169	499	168	8	470	178	471	178	469	179
456.hmmer	8	423	176	423	176	423	177	8	332	225	332	225	332	225
458.sjeng	8	562	172	562	172	562	172	8	536	181	536	180	536	180
462.libquantum	8	889	186	888	187	888	187	1	71.7	289	71.7	289	71.9	288
464.h264ref	8	602	294	602	294	603	293	8	574	308	574	309	573	309
471.omnetpp	8	817	61.2	817	61.2	817	61.2	8	806	62.0	806	62.0	809	61.8
473.astar	8	682	82.3	680	82.6	682	82.4	8	615	91.3	613	91.5	616	91.2
483.xalancbmk	8	419	132	420	131	420	131	8	419	132	420	131	420	131

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

All binaries were built with 32-bit moder except:
401.bzip2 and 456.hmmer in peak were built with 64-bit mode.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default)
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:
Adjacent Sector Prefetch = Disable
Memory Throttling = Enable

General Notes

taskset has been used to bind processes to cores except
for 462.libquantum peak

For information about Fujitsu Siemens Computers please see:
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 150

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECint_rate_base2006 = 137

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2008

Hardware Availability: Oct-2008

Software Availability: Aug-2008

General Notes (Continued)

<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 150

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECint_rate_base2006 = 137

CPU2006 license: 22

Test date: Nov-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Aug-2008

Peak Compiler Invocation (Continued)

```
456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc
           -L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
           -I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

C++ benchmarks:
icpc

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
              -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
         -opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
         -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
           -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
           -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
               -opt-malloc-options=3 -parallel -par-runtime-control
               -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
             -no-prec-div -static -unroll2 -ansi-alias
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2012 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 150

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECint_rate_base2006 = 137

CPU2006 license: 22

Test date: Nov-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Aug-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090714.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Mar 20 17:17:21 2012 by SPEC CPU2006 PS/PDF formatter v6524.