



SPEC[®] CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]2006 = 25.6

Dell Precision R5400 (Intel X5270, 3.50 GHz)

SPECint_base2006 = 22.4

CPU2006 license: 55


Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Oct-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

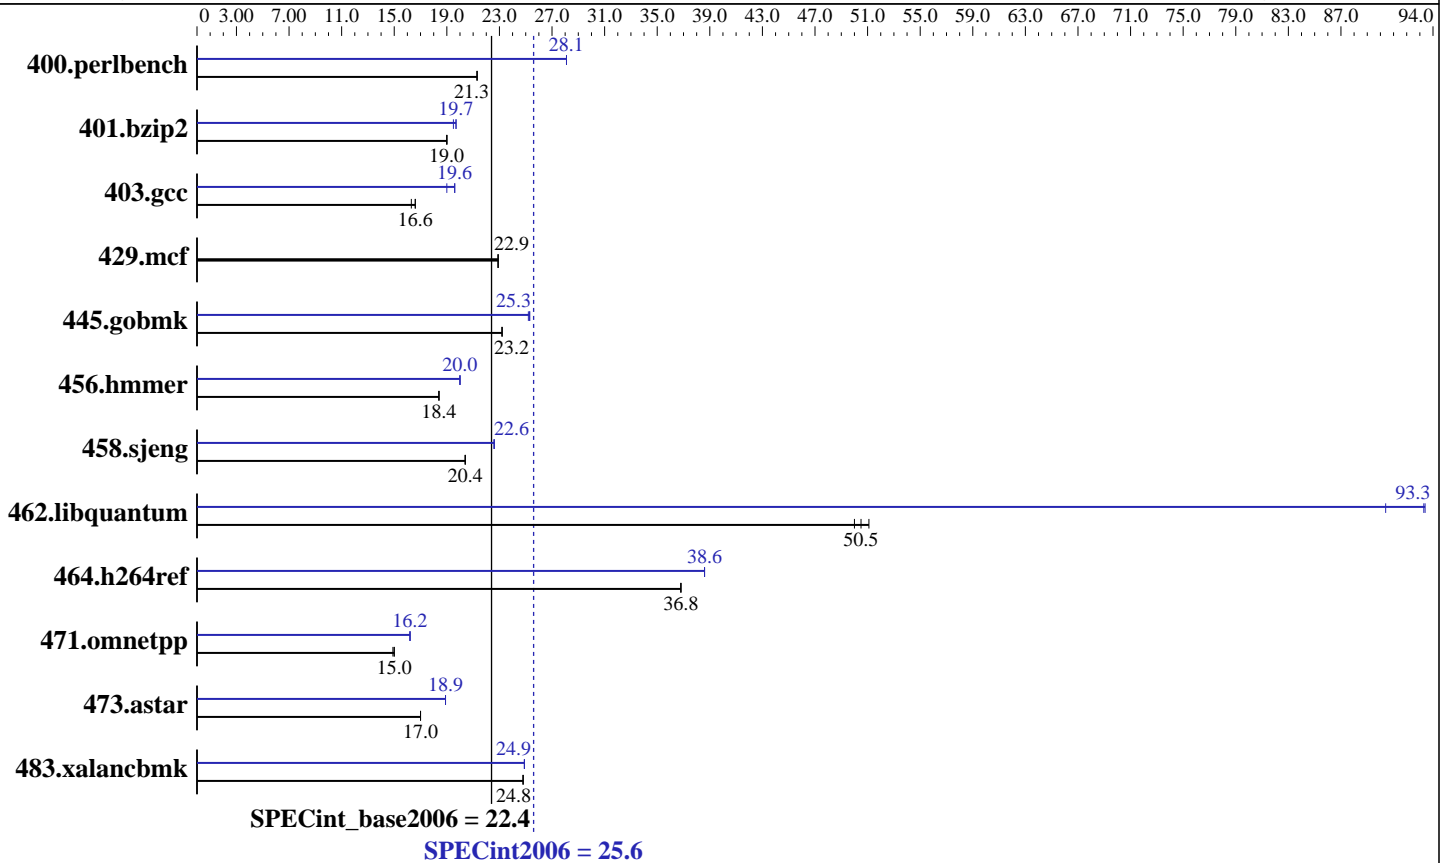

Hardware

CPU Name: Intel Xeon X5270
 CPU Characteristics: 1333 MHz Bus Speed
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (4x4 GB 667 MHz CL5 FB-DIMM)
 Disk Subsystem: 1 x 320 GB SATA 7200 RPM
 Other Hardware: None

Software

Operating System: Windows Vista Business SP1 (64-bit)
 Compiler: Intel C++ Compiler for IA-32, Version 10.1
 Build 20080312 Package ID: w_cc_p_10.1.021
 Microsoft Visual Studio 2005 SP1
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.1



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 25.6

Dell Precision R5400 (Intel X5270, 3.50 GHz)

SPECint_base2006 = 22.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2008
Hardware Availability: Oct-2008
Software Availability: Mar-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	458	21.3	459	21.3	459	21.3	348	28.1	348	28.1	347	28.1
401.bzip2	508	19.0	508	19.0	508	19.0	491	19.7	491	19.7	495	19.5
403.gcc	493	16.3	484	16.6	484	16.6	424	19.0	411	19.6	411	19.6
429.mcf	399	22.9	399	22.9	399	22.9	399	22.9	399	22.9	399	22.9
445.gobmk	453	23.2	452	23.2	452	23.2	415	25.3	415	25.3	416	25.2
456.hammer	507	18.4	506	18.4	507	18.4	467	20.0	467	20.0	467	20.0
458.sjeng	595	20.4	594	20.4	594	20.4	535	22.6	535	22.6	535	22.6
462.libquantum	414	50.0	406	51.1	411	50.5	222	93.3	222	93.4	229	90.4
464.h264ref	601	36.8	601	36.8	601	36.8	574	38.6	573	38.6	573	38.6
471.omnetpp	419	14.9	418	15.0	418	15.0	386	16.2	385	16.2	385	16.2
473.astar	413	17.0	413	17.0	413	17.0	371	18.9	372	18.9	372	18.9
483.xalancbmk	278	24.8	278	24.8	279	24.8	277	24.9	277	24.9	277	24.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Binaries were built on Windows Vista Ultimate (64-bit)

BIOS Settings

Adjacent Cache Line Prefetch set to ON

Compiler Invocation

C benchmarks:
icl -Qstd=c99

C++ benchmarks:
icl

Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 25.6

Dell Precision R5400 (Intel X5270, 3.50 GHz)

SPECint_base2006 = 22.4

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Oct-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

Base Optimization Flags

C benchmarks:

-fast -Qparallel -Qpar-runtime-control -Qvec-guard-write /F512000000
libguide40.lib

C++ benchmarks:

-fast -Qcxx_features /F512000000 shlw32m.lib libguide40.lib
-link /FORCE:MULTIPLE

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qprefetch -Qparallel -Qpar-runtime-control /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch
/F512000000 libguide40.lib

403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
libguide40.lib

429.mcf: basepeak = yes

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo
-Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias -Qopt-multi-version-aggressive /F512000000
libguide40.lib

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4
/F512000000 libguide40.lib

462.libquantum: -fast -Qunroll4 -Ob0 -Qprefetch
-Qopt-streaming-stores:always -Qparallel
-Qpar-runtime-control /F512000000 libguide40.lib

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias /F512000000 libguide40.lib

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=block -Qcxx_features /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 25.6

Dell Precision R5400 (Intel X5270, 3.50 GHz)

SPECint_base2006 = 22.4

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Oct-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

Peak Optimization Flags (Continued)

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=routine -Qcxx_features /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qcxx_features /F512000000 shlw32m.lib libguide40.lib
-link /FORCE:MULTIPLE

Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Mon Jul 13 13:58:26 2009 by SPEC CPU2006 PS/PDF formatter v6323.