



# SPEC® CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 23.3

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECint\_base2006 = 20.1

CPU2006 license: 55


Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

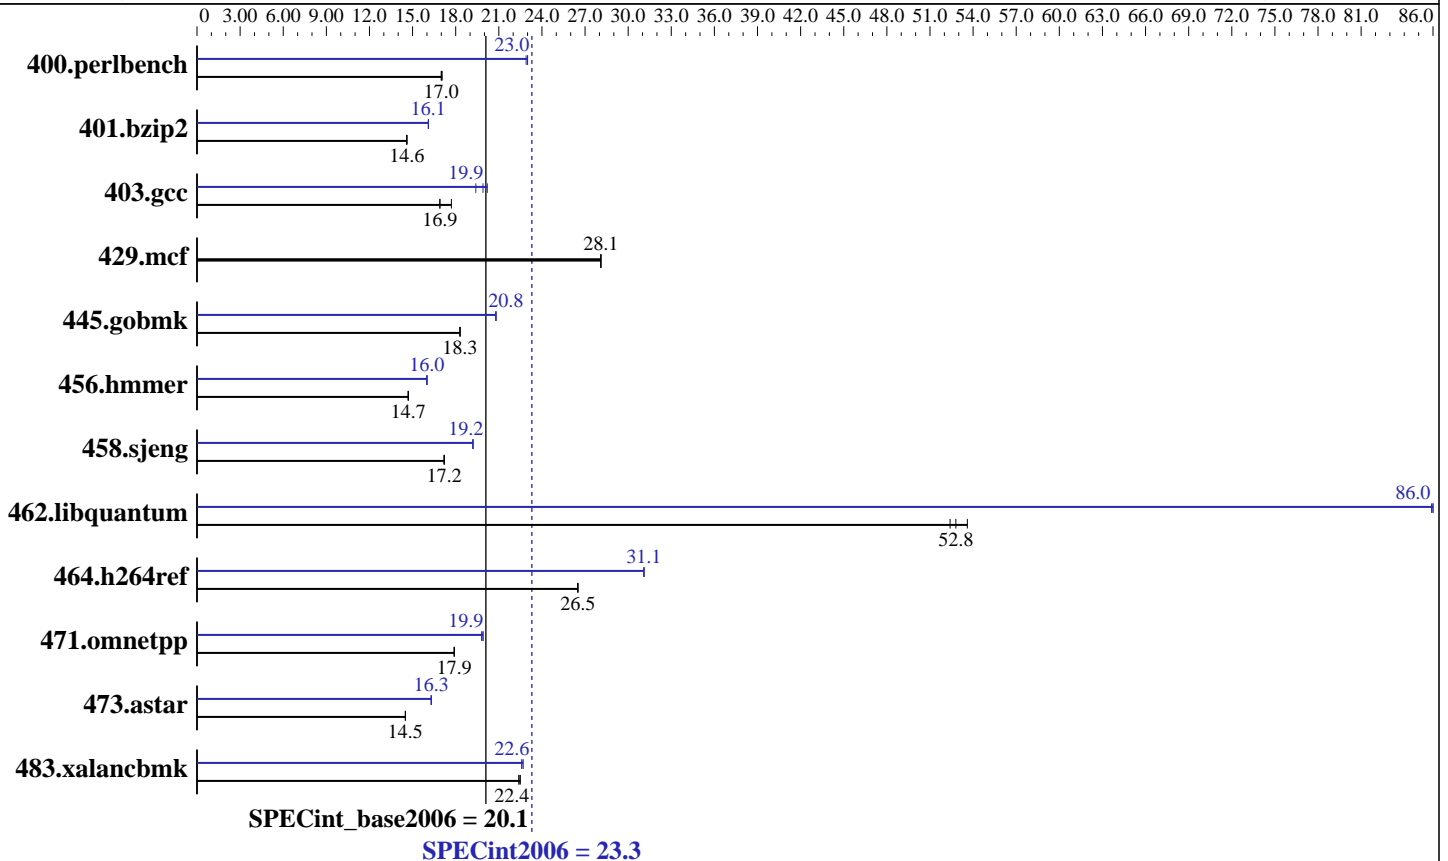

### Hardware

CPU Name: Intel Core 2 Extreme QX9300  
 CPU Characteristics: 1067 MHz Bus Speed  
 CPU MHz: 2530  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4x2 GB 1067 MHz CL7 DDR3)  
 Disk Subsystem: 1 x 80 GB SATA 7200 RPM  
 Other Hardware: None

### Software

Operating System: Windows Vista Business SP1 (64bit)  
 Compiler: Intel C++ Compiler for IA-32, Version 10.1  
 Build 20080312 Package ID: w\_cc\_p\_10.1.021  
 Microsoft Visual Studio 2005 SP1  
 Auto Parallel: Yes  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.1



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.3

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECint\_base2006 = 20.1

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Sep-2008  
Hardware Availability: Sep-2008  
Software Availability: Mar-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	573	17.1	<b><u>573</u></b>	<b><u>17.0</u></b>	574	17.0	426	22.9	425	23.0	<b><u>425</u></b>	<b><u>23.0</u></b>
401.bzip2	<b><u>663</u></b>	<b><u>14.6</u></b>	663	14.6	663	14.6	598	16.1	598	16.1	<b><u>598</u></b>	<b><u>16.1</u></b>
403.gcc	<b><u>477</u></b>	<b><u>16.9</u></b>	454	17.7	478	16.9	<b><u>404</u></b>	<b><u>19.9</u></b>	398	20.2	414	19.4
429.mcf	325	28.1	325	28.1	<b><u>325</u></b>	<b><u>28.1</u></b>	325	28.1	325	28.1	<b><u>325</u></b>	<b><u>28.1</u></b>
445.gobmk	573	18.3	572	18.3	<b><u>573</u></b>	<b><u>18.3</u></b>	<b><u>505</u></b>	<b><u>20.8</u></b>	504	20.8	505	20.8
456.hammer	635	14.7	<b><u>635</u></b>	<b><u>14.7</u></b>	635	14.7	<b><u>585</u></b>	<b><u>16.0</u></b>	585	16.0	585	16.0
458.sjeng	<b><u>702</u></b>	<b><u>17.2</u></b>	702	17.2	702	17.2	630	19.2	630	19.2	<b><u>630</u></b>	<b><u>19.2</u></b>
462.libquantum	386	53.6	<b><u>392</u></b>	<b><u>52.8</u></b>	395	52.4	241	86.0	241	85.9	<b><u>241</u></b>	<b><u>86.0</u></b>
464.h264ref	834	26.5	<b><u>834</u></b>	<b><u>26.5</u></b>	835	26.5	712	31.1	<b><u>712</u></b>	<b><u>31.1</u></b>	712	31.1
471.omnetpp	349	17.9	349	17.9	<b><u>349</u></b>	<b><u>17.9</u></b>	315	19.9	315	19.8	<b><u>315</u></b>	<b><u>19.9</u></b>
473.astar	484	14.5	<b><u>484</u></b>	<b><u>14.5</u></b>	483	14.5	431	16.3	<b><u>431</u></b>	<b><u>16.3</u></b>	431	16.3
483.xalancbmk	307	22.5	308	22.4	<b><u>307</u></b>	<b><u>22.4</u></b>	<b><u>305</u></b>	<b><u>22.6</u></b>	305	22.6	305	22.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Binaries were built on Windows Vista Ultimate (64-bit)

## Compiler Invocation

C benchmarks:  
icl -Qstd=c99  
  
C++ benchmarks:  
icl

## Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:  
-fast -Qparallel -Qpar-runtime-control -Qvec-guard-write /F512000000  
libguide40.lib

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.3

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECint\_base2006 = 20.1

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib libguide40.lib
-link /FORCE:MULTIPLE
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qprefetch -Qparallel -Qpar-runtime-control /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE
```

```
401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch
/F512000000 libguide40.lib
```

```
403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
libguide40.lib
```

```
429.mcf: basepeak = yes
```

```
445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo
-Qprec-div- -Qansi-alias /F512000000
```

```
456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias -Qopt-multi-version-aggressive /F512000000
libguide40.lib
```

```
458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4
/F512000000 libguide40.lib
```

```
462.libquantum: -fast -Qunroll14 -Ob0 -Qprefetch
-Qopt-streaming-stores:always -Qparallel
-Qpar-runtime-control /F512000000 libguide40.lib
```

```
464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias /F512000000 libguide40.lib
```

C++ benchmarks:

```
471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=block -Qcxx_features /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE
```

```
473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=routine -Qcxx_features /F512000000
shlw32m.lib libguide40.lib -link /FORCE:MULTIPLE
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.3

Dell Precision M6400 (Intel QX9300, 2.53 GHz)

SPECint\_base2006 = 20.1

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Mar-2008

## Peak Optimization Flags (Continued)

```
483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
               -Qcxx_features /F512000000 shlw32m.lib libguide40.lib
               -link /FORCE:MULTIPLE
```

## Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090713.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Mon Jul 13 15:34:13 2009 by SPEC CPU2006 PS/PDF formatter v6323.