



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

## Supermicro

### SPECfp<sup>®</sup>\_rate2006 = 118

### A+ Server 1021M-UR+B, AMD Opteron 2384

### SPECfp\_rate\_base2006 = 105

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

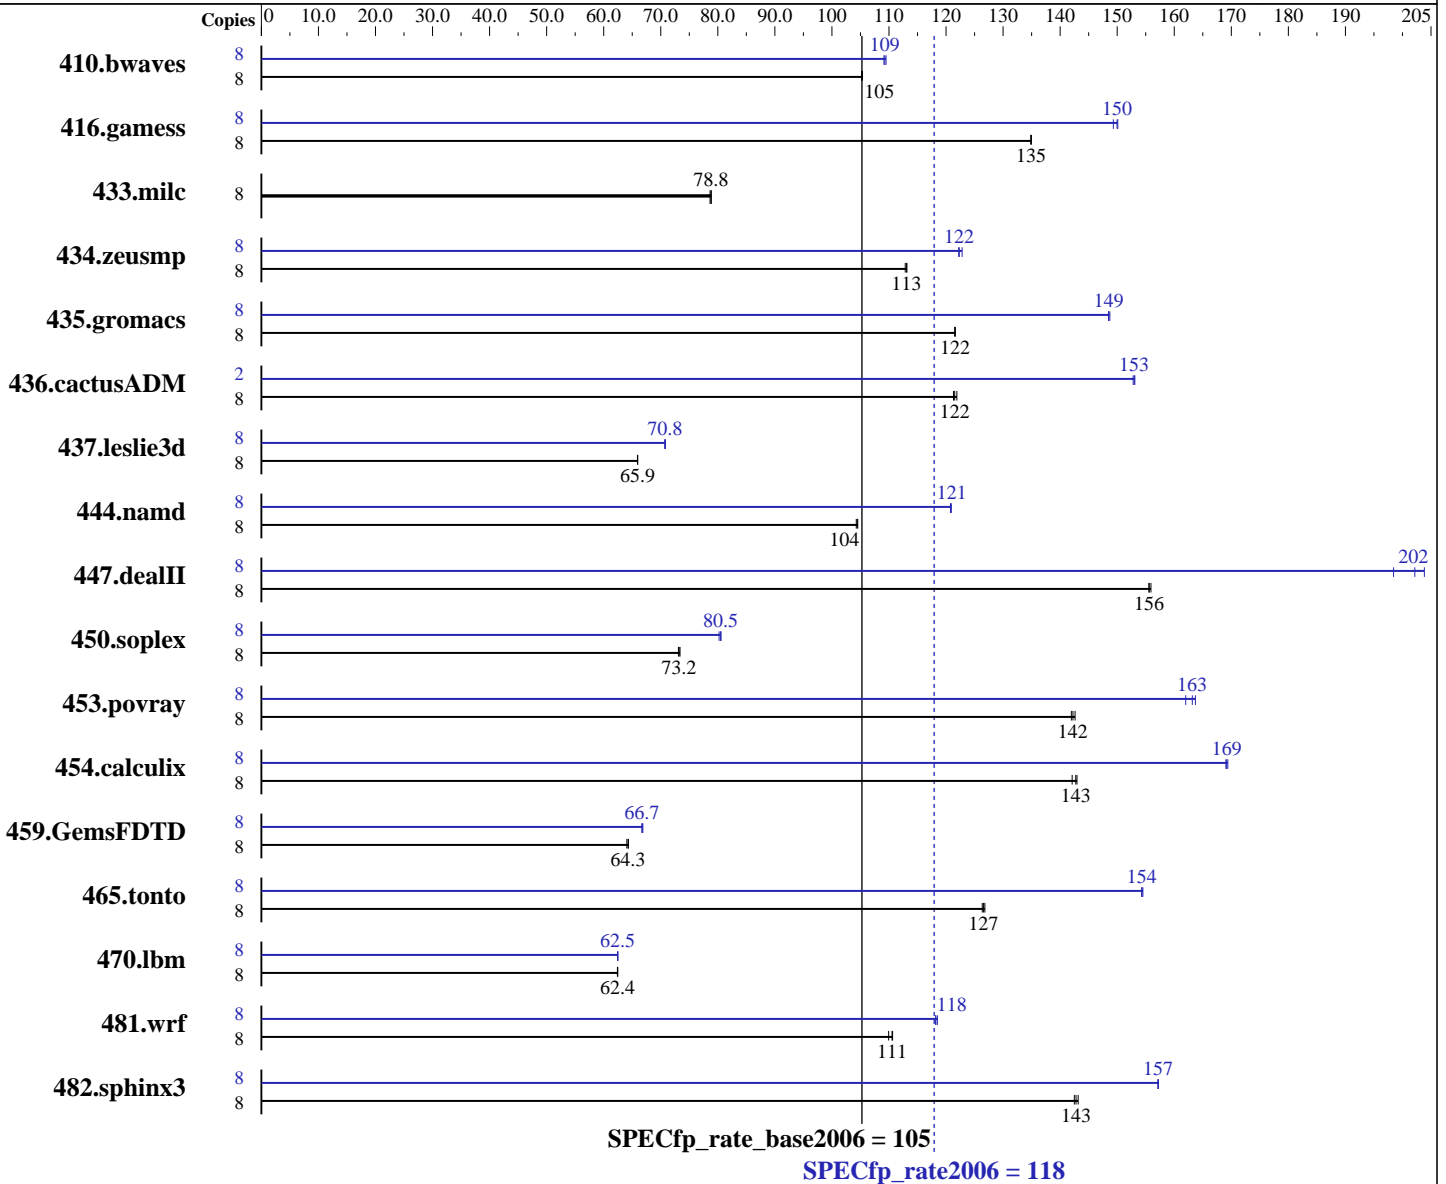

#### Hardware

CPU Name: AMD Opteron 2384  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

#### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2  
 PathScale Compiler Suite Version 3.2  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

## Supermicro

SPECfp\_rate2006 = **118**

A+ Server 1021M-UR+B, AMD Opteron 2384

SPECfp\_rate\_base2006 = **105**

CPU2006 license: 49

Test date: Oct-2008

Test sponsor: Advanced Micro Devices

Hardware Availability: Nov-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

### Hardware (Continued)

L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg. Dual Rank)  
 Disk Subsystem: 1 x 300 GB SATA, 7200 RPM  
 Other Hardware: None

### Software (Continued)

Other Software: binutils 2.18  
 32-bit and 64-bit libhugetlbfs libraries

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	<b><u>1032</u></b>	<b><u>105</u></b>	1034	105	1032	105	8	993	109	<b><u>995</u></b>	<b><u>109</u></b>	996	109		
416.gamess	8	1161	135	1161	135	<b><u>1161</u></b>	<b><u>135</u></b>	8	1044	150	1049	149	<b><u>1044</u></b>	<b><u>150</u></b>		
433.milc	8	<b><u>932</u></b>	<b><u>78.8</u></b>	932	78.8	934	78.6	8	<b><u>932</u></b>	<b><u>78.8</u></b>	932	78.8	934	78.6		
434.zeusmp	8	644	113	645	113	<b><u>644</u></b>	<b><u>113</u></b>	8	593	123	<b><u>595</u></b>	<b><u>122</u></b>	596	122		
435.gromacs	8	<b><u>470</u></b>	<b><u>122</u></b>	470	122	470	122	8	384	149	<b><u>385</u></b>	<b><u>149</u></b>	385	148		
436.cactusADM	8	788	121	784	122	<b><u>787</u></b>	<b><u>122</u></b>	2	156	153	<b><u>156</u></b>	<b><u>153</u></b>	156	153		
437.leslie3d	8	1140	65.9	<b><u>1140</u></b>	<b><u>65.9</u></b>	1141	65.9	8	1062	70.8	<b><u>1063</u></b>	<b><u>70.8</u></b>	1064	70.7		
444.namd	8	615	104	<b><u>614</u></b>	<b><u>104</u></b>	614	105	8	531	121	<b><u>531</u></b>	<b><u>121</u></b>	531	121		
447.dealII	8	587	156	<b><u>588</u></b>	<b><u>156</u></b>	588	156	8	461	198	<b><u>453</u></b>	<b><u>202</u></b>	449	204		
450.soplex	8	<b><u>911</u></b>	<b><u>73.2</u></b>	909	73.4	913	73.1	8	832	80.2	828	80.6	<b><u>829</u></b>	<b><u>80.5</u></b>		
453.povray	8	298	143	300	142	<b><u>299</u></b>	<b><u>142</u></b>	8	<b><u>261</u></b>	<b><u>163</u></b>	260	164	263	162		
454.calculix	8	462	143	<b><u>462</u></b>	<b><u>143</u></b>	464	142	8	390	169	390	169	<b><u>390</u></b>	<b><u>169</u></b>		
459.GemsFDTD	8	1325	64.1	<b><u>1320</u></b>	<b><u>64.3</u></b>	1320	64.3	8	1269	66.9	1273	66.7	<b><u>1272</u></b>	<b><u>66.7</u></b>		
465.tonto	8	623	126	621	127	<b><u>622</u></b>	<b><u>127</u></b>	8	510	154	509	155	<b><u>510</u></b>	<b><u>154</u></b>		
470.lbm	8	1762	62.4	1760	62.5	<b><u>1761</u></b>	<b><u>62.4</u></b>	8	1760	62.5	<b><u>1760</u></b>	<b><u>62.5</u></b>	1760	62.4		
481.wrf	8	813	110	808	111	<b><u>808</u></b>	<b><u>111</u></b>	8	754	118	<b><u>756</u></b>	<b><u>118</u></b>	756	118		
482.sphinx3	8	<b><u>1092</u></b>	<b><u>143</u></b>	1094	142	1089	143	8	992	157	992	157	<b><u>992</u></b>	<b><u>157</u></b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores

## Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=7168 in /etc/sysctl.conf

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 118

A+ Server 1021M-UR+B, AMD Opteron 2384

SPECfp\_rate\_base2006 = 105

CPU2006 license: 49

Test date: Oct-2008

Test sponsor: Advanced Micro Devices

Hardware Availability: Nov-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Operating System Notes (Continued)

```
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_MORECORE = "yes"
```

```
LD_LIBRARY_PATH = "/root/work/cpu2006-amd909gh/amd909gh-libs/64:/root/work/cpu2006-amd909gh/amd909gh-libs/32"
```

```
NCPUS = "4"
```

## Base Compiler Invocation

C benchmarks:

```
pgcc
```

C++ benchmarks:

```
pgcpp
```

Fortran benchmarks:

```
pgf95
```

Benchmarks using both Fortran and C:

```
pgcc pgf95
```

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp\_rate2006 = 118**

**A+ Server 1021M-UR+B, AMD Opteron 2384**

**SPECfp\_rate\_base2006 = 105**

**CPU2006 license:** 49

**Test date:** Oct-2008

**Test sponsor:** Advanced Micro Devices

**Hardware Availability:** Nov-2008

**Tested by:** Advanced Micro Devices

**Software Availability:** Jun-2008

## Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 118

A+ Server 1021M-UR+B, AMD Opteron 2384

SPECfp\_rate\_base2006 = 105

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

## Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64

436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64 -Mnomain

459.GemsFDTD: -DSPEC\_CPU\_LP64

465.tonto: -DSPEC\_CPU\_LP64

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge

-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2)

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 118

A+ Server 1021M-UR+B, AMD Opteron 2384

SPECfp\_rate\_base2006 = 105

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse  
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch  
-Mfprelaxed --zc\_eh -tp barcelona-64 -Bstatic\_pgi

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on  
-fno-exceptions -m32

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3  
-INLINE:aggressive=on -OPT:IEEE\_arith=3  
-OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
-OPT:malloc\_alg=1 -CG:load\_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc  
-Mprefetch=nta -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed  
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge  
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse  
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0  
-Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:prefer\_lru\_reg=off  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 118

A+ Server 1021M-UR+B, AMD Opteron 2384

SPECfp\_rate\_base2006 = 105

CPU2006 license: 49

Test date: Oct-2008

Test sponsor: Advanced Micro Devices

Hardware Availability: Nov-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur  
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64  
-Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-OPT:malloc\_alg=1 -m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20081112.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20081112.html)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20081112.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20081112.xml)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>



# SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Supermicro

SPECfp\_rate2006 = 118

A+ Server 1021M-UR+B, AMD Opteron 2384

SPECfp\_rate\_base2006 = 105

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Nov 25 11:38:02 2008 by SPEC CPU2006 PS/PDF formatter v6197.